

## LWO-SFP-RJ45-M-HPE

### 10M/100M/1000 Mbit SFP, RJ45, 100m, HP Aruba


#### Features

- Up to 1.25 Gb/s bi-directional data links
- Hot-pluggable SFP footprint
- Compact RJ-45 connector assembly
- Fully metal enclosure, for lower EMI
- RoHS compliant and lead-free
- Single +3.3V power supply
- HP Aruba Coding
- 1000BASE-T operation in host systems with SERDES interface
- 1.25 Gigabit Ethernet over Cat 5 cable
- Ambient Operating temperature: 0°C to +70°C

#### Product Description

10/100/1000M Copper Small Form Pluggable (SFP) transceivers are based on the SFP Multi Source Agreement (MSA). They are compatible with the Gigabit Ethernet and 1000BASE-T standards as specified in IEEE Std 802.3. The physical layer IC (PHY) can be accessed via I2C, allowing access to all PHY settings and features.

This copper SFP uses the SFP's RX\_LOS pin for link indication. If pull up SFP's TX\_DISABLE pin, PHY IC be reset.

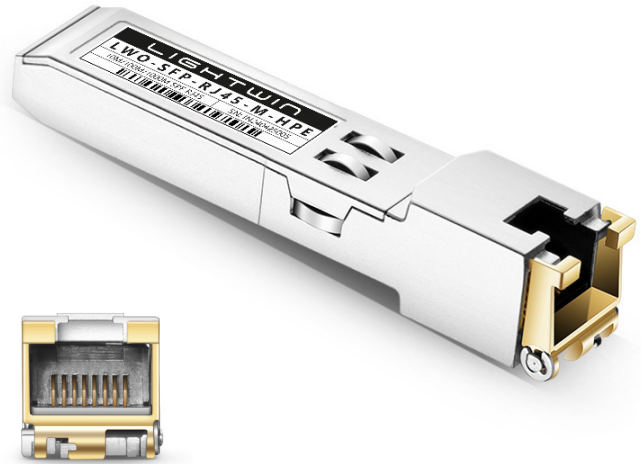

#### Work Mode

Work Mode	Support
Serdes to 1000base-T	Yes (default)
SGMII to 10/100/1000base-Tx	Yes (realization by configuring PHY IC via I2C, detail in section 10)

#### SFP to Host Connector Pin Out 1/2

Pin	Symbol	Name/Description	Ref.
1	VEET	Transmitter Ground (Common with Receiver Ground)	
2	TFAULT	Transmitter Fault. Not supported.	
3	TDIS	Transmitter Disable. Laser output disabled on high or open.	1
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	2
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	2
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	2
7	Rate Select	No connection required	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	
9	VEER	Receiver Ground (Common with Transmitter Ground)	
10	VEER	Receiver Ground (Common with Transmitter Ground)	
11	VEER	Receiver Ground (Common with Transmitter Ground)	
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	VEER	Receiver Ground (Common with Transmitter Ground)	
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground (Common with Receiver Ground)	
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEET	Transmitter Ground (Common with Receiver Ground)	


#### Notes

1. PHY disabled on  $T_{DIS} > 2.0V$  or open, enabled on  $T_{DIS} < 0.8V$
2. Should be pulled up with 4.7k - 10k Ohms on host board to a voltage between 2.0 V and 3.6 V. MOD\_DEF(0) pulls line low to indicate module is plugged in.

## LWO-SFP-RJ45-M-HPE

10M/100M/1000 Mbit SFP, RJ45, 100m, HP Aruba

Diagram of Host Board Connector Block Pin Numbers and Names

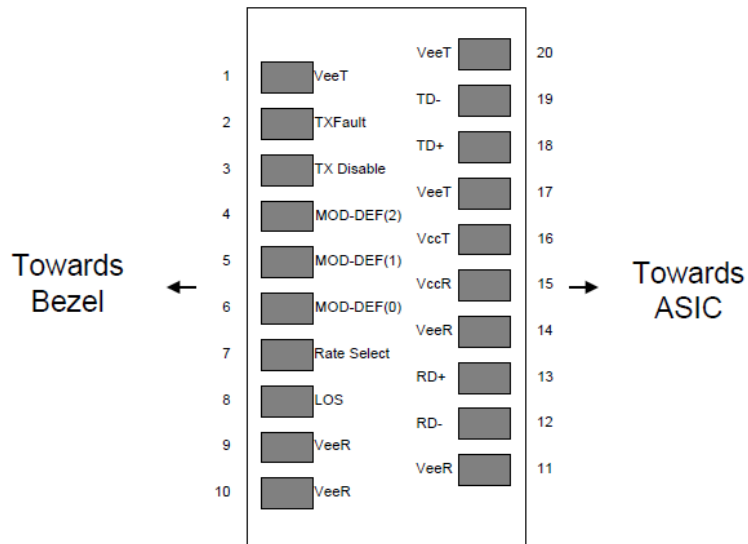

### +3.3V Volt Electrical Power Interface

The SFP-1000BASE-T has an input voltage range of 3.3 V +/- 5%. The 4V maximum voltage is not allowed for continuous operation.

Parameter	Symbol	Min	Typ	Max	Unit	Notes/Conditions
Supply Current	I <sub>s</sub>		320	390	mA	
Input Voltage	V <sub>cc</sub>	3.13	3.3	3.47	V	Referenced to GND
Maximum Voltage	V <sub>max</sub>			4	V	

### Low-Speed Signals, Low-Speed Signals, Electronic Characteristics

MOD\_DEF(1) (SCL) and MOD\_DEF(2) (SDA), are open drain CMOS signals (see section VII, „Serial Communication Protocol“). Both MOD\_DEF(1) and MOD\_DEF(2) must be pulled up to host\_Vcc

Parameter	Symbol	Min	Max	Unit	Notes/Conditions
SFP Output LOW	VOL	0	0.5	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
SFP Output HIGH	VOH	host_Vcc - 0.5	host_Vcc + 0.3	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
SFP Input LOW	VIL	0	0.8	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector
SFP Input HIGH	VIH	2	Vcc + 0.3	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector

## LWO-SFP-RJ45-M-HPE

10M/100M/1000 Mbit SFP, RJ45, 100m, HP Aruba

### High-Speed Electrical Interface

All high-speed signals are AC-coupled internally.

#### High-Speed Electrical Interface, Transmission Line-SFP

Parameter	Symbol	Min	Typ	Max	Unit	Notes/Conditions
Line Frequency	fL		125		MHz	5-level encoding, per IEEE 802.3
Tx Output Impedance	Zout,TX		100		Ohm	Differential, for all frequencies between 1MHz and 125MHz
Rx Input Impedance	Zin,RX		100		Ohm	Differential, for all frequencies between 1MHz and 125MHz

#### High-Speed Electrical Interface, Host-SFP

Parameter	Symbol	Min	Typ	Max	Unit	Notes/Conditions
Single ended data input swing	Vinsing	250		1200	mV	Single ended
Single ended data output swing	Voutsing	350		800	mV	Single ended
Rise/Fall Time	Tr,Tf		175		psec	20% - 80%
Tx Input Impedance	Zin		50		Ohm	Single ended
Rx Output Impedance	Zout		50		Ohm	Single ended

### General Specifications

#### General

Parameter	Symbol	Min	Typ	Max	Unit	Notes/Conditions
Data Rate	BR	10		1000	Mb/sec	IEEE 802.3 compatible. See Notes 2 through 3 below
Cable Length	L			100	m	Category 5 UTP. BER

### Notes

1. Clock tolerance is +/- 50 ppm
2. By default, the SFP-1000BASE-T is a full duplex device in preferred master mode
3. Automatic crossover detection is enabled. External crossover cable is not required

### Environmental Specifications

Parameter	Symbol	Min	Typ	Max	Unit	Notes/Conditions
Operating Temperature	Top	0		70	°C	Case temperature
Storage Temperature	Tsto	-40		85	°C	Ambient temperature

### Serial Communication Protocol

All LIGHTWIN SFPs support the 2-wire serial communication protocol outlined in the SFP MSA. These SFPs use an MCU, can be accessed with address of A0h. Serial Bus Timing, Requirements

The SFP-1000BASE-T physical layer IC can also be accessed via the 2-wire serial bus at address ACh. For details interfacing with the PHY IC, see Marvell data sheet titled „Alaska Ultra 88E1111 Integrated Gigabit Ethernet Transceiver“ (Marvell document number MV-S100649-00).

#### Serial Bus Timing, Requirements

Parameter	Symbol	Min	Typ	Max	Unit	Notes/Conditions
I <sup>2</sup> C Clock Rate		0		200,000	Hz	

## LWO-SFP-RJ45-M-HPE

10M/100M/1000 Mbit SFP, RJ45, 100m, HP Aruba

### Recommended Application Circuit

