
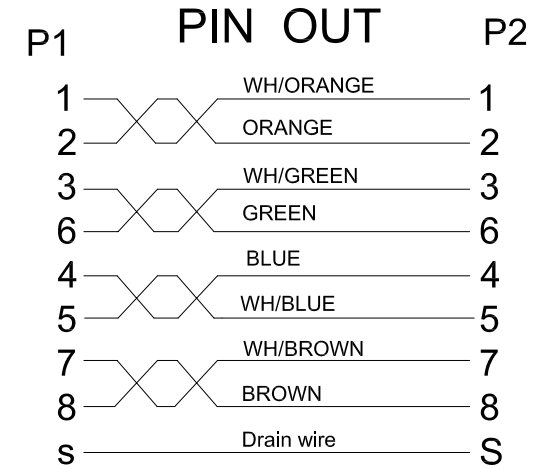


**RoHS
Compliant**

Customer number	SOP
004	xxx

VERSION	DESCRIPTION	DATE
1.0	New Release	2015/4/22

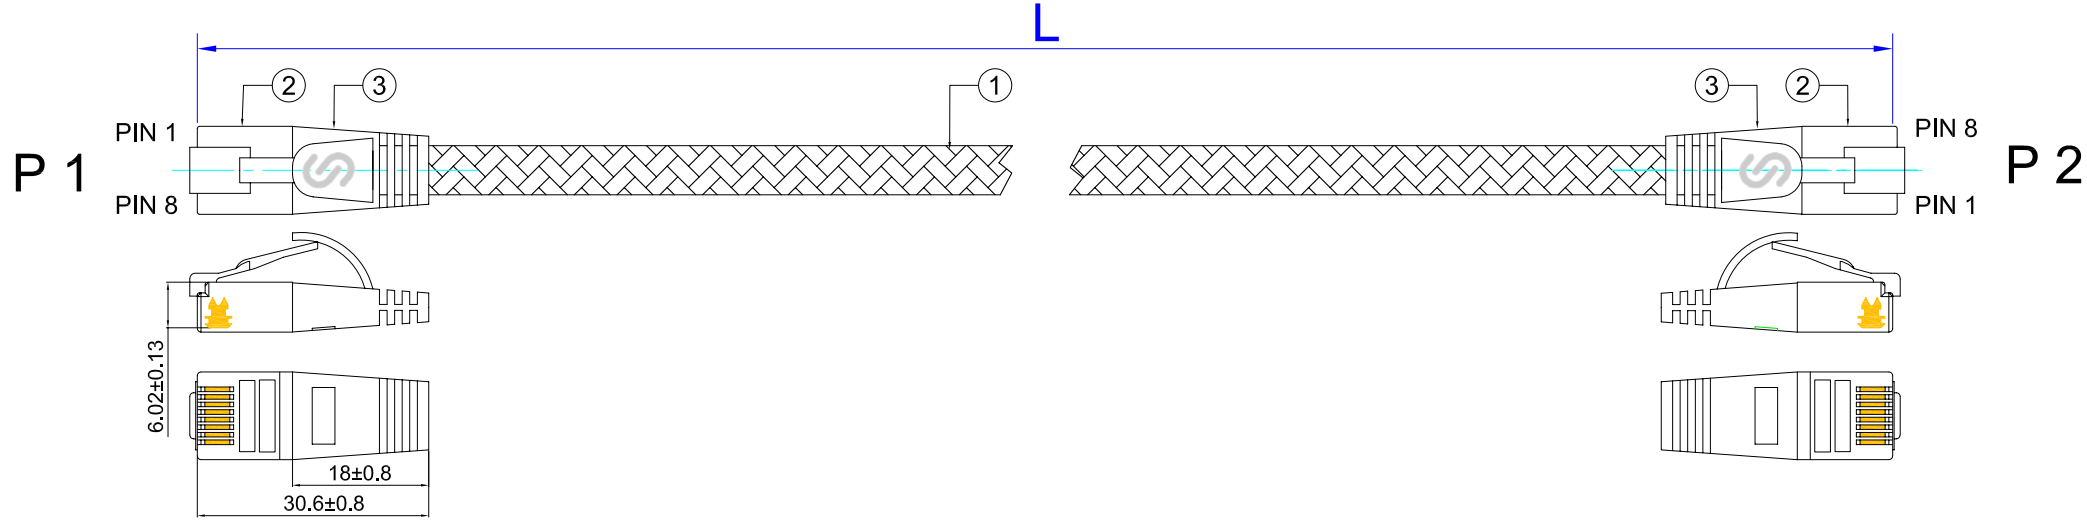

- Test:
- 100%Open Short and miswire test.
 - DC300V,Contact resistance(3+2L)Ω MAX.
 - Insulation resistance 1MΩ MIN.
 - Pass TIA Cat.6 Channel Test (L≤15m)
 - Temperature range: -20°C bis +60°C



5	
4	
3	PVC Black(Black/60P), Model:SR073
2	(P1&P2) RJ45,8P8C,Short plug,Long latch,Pin gold plated 50u",Nickel plated shell
1	CAT.6 UTP 4P*36AWG-BC STRANDED,PVC+Nylon braid, Jacket
No.	Description

		TITLE	PKW-TOUGH-K6 x.x		
UNIT	mm	P/N	DRAWN BY		
unless otherwise stated Tolerances		Customer P/N	CHECK BY		
mm	angular	SIZE	SCALE	PAGE	1/1
XXX.XX ±0.3	±2°	A4	Free		APPROVAL BY
XX.XX ±0.2					
X.XX ±0.1					