


WIRING DIAGRAM

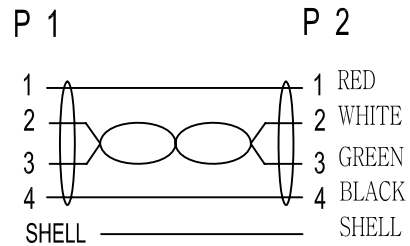

NOTE:

- 1.PRINTING:AWM 80°C 30V VW-1
- 28AWG×1P 24AWG×2C USB2.0 HIGH SPEED CABLE
- 2.ROHS COMPLIANT

3	CABLE	28AWG TXR*1P+24AWG TXR*2C+AL+B (COVERAGE RATE IN 65%) USB2.0 HIGHSPEED CABLE JACKET PVC BLACK OD=4.5±0.1mm	1
2	OVERMOLD	PVC COLOR:GREY	2
1	CONNECTOR	USB A TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	2
NO.	MAT.NAME	DESCRIPTION	Q'TY

CUSTOMER'S ITEM			CUSTOMER			Wirewin [®] European Cabling Solutions
DRAWING		TITLE		USB CABLE		
UNIT	mm	SCALE	1:1	REV		
DRAWN BY		CHECK BY		APPRO BY	DATE	