

Notes:
 Performance:
 Meets Cat.5E EIA/TIA 568B.2 Standard.

Electrical Specifications:
 Insulation Resistance: 500M ohms (min.)
 Contact Resistance: 20m ohms (max.)
 Current Rating : 1.5 Amps.
 DC Resistance: 0.1 ohms(max.)
 Withstanding Voltage : 1000 VAC RMS @ 60Hz/ 1 min.

Mechanical Specifications:
 IDC Punch Down Cycle : Over 25 Cycles (min.)
 RJ-45 Jack Insertion Cycle : Over 200 Cycles (min.)





Accessory:
 1.M3 Screw Set, For Pre-Assembled Ground Wire
 2.Cable Tie(75X1.9mm)X8Pcs
 3.Instruction Sheet
 4.expanded screw X 2 Set

Color: GRAY RAL7035

PACKING: 1pcs /PE BAG + INNER CARTON

RoHS & REACH Compliant

Pin Out:

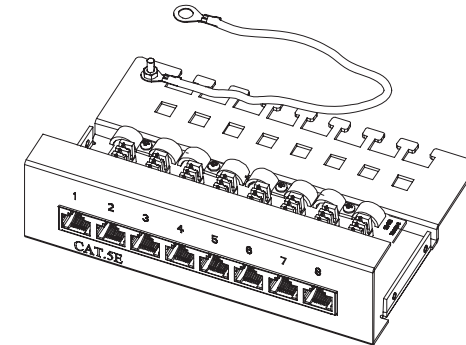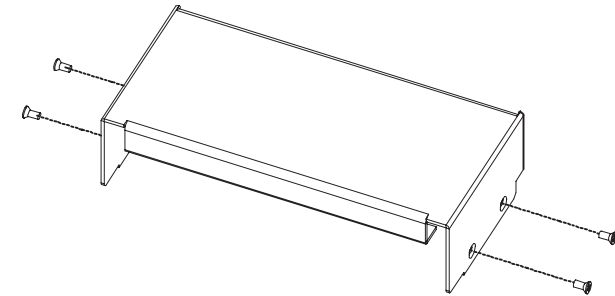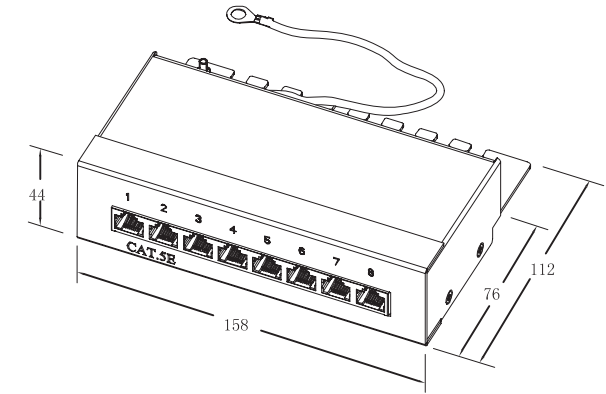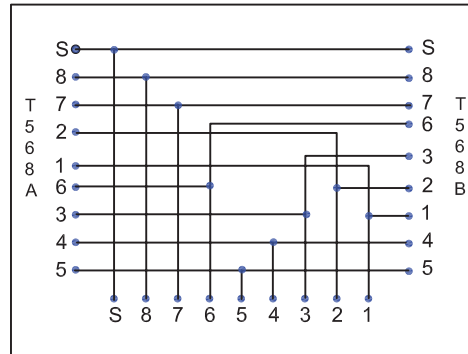

MATERIAL LIST:

⑥	Bottom Panel :	1.5mm thickness Metallic Panel(SECC) GRAY RAL7035	1pcs	
⑤	Upper Panel Cover :	1.0mm thickness Metallic Panel(SECC) GRAY RAL7035	1pcs	
④	RJ45 Jack :	Housing-Fireproof PBT UL-94V0 Pin-8P8C 3 micro inches gold plated	8pcs	
③	PCB:	FR-4/1.6mm UL-94V0	1pcs	
②	IDC Body:	Fireproof PC/ABS UL-94V0/With Colour Coded Printing T568A/B	8pcs	
①	IDC Pin:	Bronze & Tinned	64pcs	
	IDC Terminal:	For 22-26 AWG Cable	64pcs	
NO.			QT' Y	REMARK

Wirewin® European Cabling Solutions

CUSTOMER		ITEM NO.		UNIT		MM	
PRODUCT NAME		DVP-TRIO-K5E 8		DATE		01.04.2011	
DRAWNBY		CHECKBY		APPOBY		DATE	
BY		CHK		REVISION RECORD MODIFICATIONS		DATE	
NEW		A		REV.		01.04.2011	