


edge can be breakable to save space

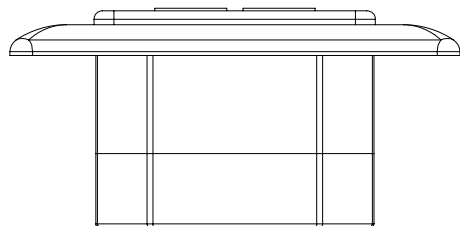

NOTE:

ELECTRICAL:

- 1. VOLTAGE RATING : 125V AC RMS
- 2. CURRENT RATING : 1.5A mp
- 3. CONTACT RESISTANCE : 100 MILLI OHMS MAX
- 4. INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
- 5. DIELECTRIC STRENGTH : 750V AC RMS 60Hz, 1MIN
- CAT. 6 PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B. 2-1

Accessory:

- 1. Instruction Sheet 1pcs

RoHS 2.0 Compliant

PACKING: 1PCS/INNER CARTON

COLOR: RAL 9010

Designable

Suitable for central plate of the Germany Company Busch Jaeger and Jung

ENVIRONMENTAL:

- 1. STORAGE : -40° TO+85°
- 2. OPERATION : 0° TO+70°
- RJ45 JACK COMPLY TO REQUIREMENTS OF IEC-60603-7-5
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

MECHANICAL

- 1. COVER&SHUTTER: FLAME RETARDANT ABS
- 2. JACK HOUSING : PBT+15%GF UL94V0
- 3. PCB : FR-4 THINKNESS:1.6MM
- 4. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.35MM 8P8C 3u"Gold Plated
- 5. IDC CONTACT : PHOSPHOR BRONZE T=0.50MM WITH NICKEL PLATING
- 6. MOUNTING BRACKET: ZINC ALLOY#3
- 7. TOP COVER : ZINC ALLOY#3
- 8. RJ45 JACK LIFE: 750 TIMES MIN
- 9. IDN LIFE : 200 TIMES MIN
- 10. WIRE : AWG 22-24 Cable entry left/right
- 11. IDC BODY :Krone Type Fireproof PC/ABS UL-94V0/
With Colour Coded Printing T568A/B
- 12. RETENTIVENESS OF INSERTION STRUCTURE: 50N 60±5s



PRODUCT NAME		ITEM NO.	DD-TRIO-C6 UP2 WS	
UNIT	MM			
DATE	REV.	DRAWNBY	CHECKBY	APPOBY

DATE	REV.	A		
------	------	---	--	--