


# SMA MALE TO FAKRA D MALE CABLE

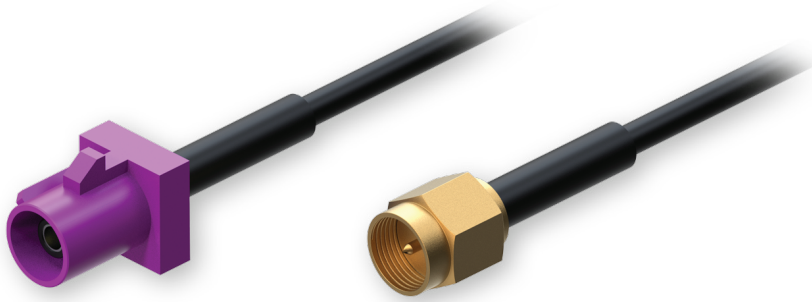

## Technical Data

|                       |                   |
|-----------------------|-------------------|
| Connector 1           | SMA Male          |
| Connector 2           | Fakra D Male      |
| Frequency range       | 0 – 6000 MHz      |
| V.S.W.R               | 1.35 MAX          |
| Impedance             | 50 $\Omega$       |
| Operating temperature | -40 °C ~ +105 °C  |
| Working voltage       | 335 Vmax          |
| Withstand voltage     | 1000 Vrms         |
| Durability            | $\geq$ 500 cycles |
| Cable type            | LMR100            |
| Weight                | 11.30 g           |
| Total length          | 500 mm            |
| Protection material   | PVC               |
| RoHS compliant        | ✓                 |

**Spatial measurements**

---

