


RP-SMA MALE TO FAKRA I MALE CABLE

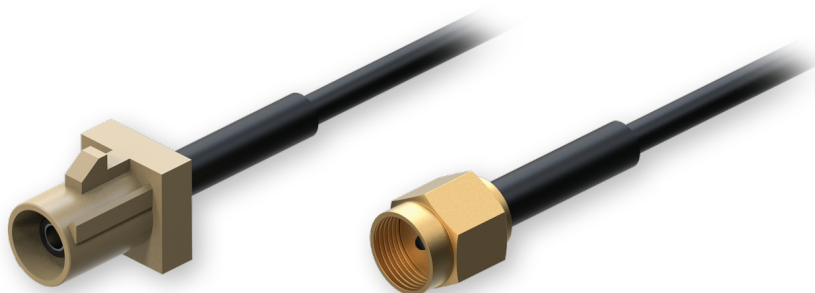

Technical Data

Connector 1	RP SMA Male
Connector 2	Fakra I Male
Frequency range	0 – 6000 MHz
V.S.W.R	1.35 MAX
Impedance	50 Ω
Operating temperature	-40 °C ~ +105 °C
Working voltage	335 Vmax
Withstand voltage	1000 Vrms
Durability	$\geq$ 500 cycles
Cable type	LMR100
Weight	11.30 g
Total length	500 mm
Protection material	PVC
RoHS compliant	✓

Spatial measurements

