


# COUPLER MOUNTING PANEL INSTALLATION INSTRUCTION

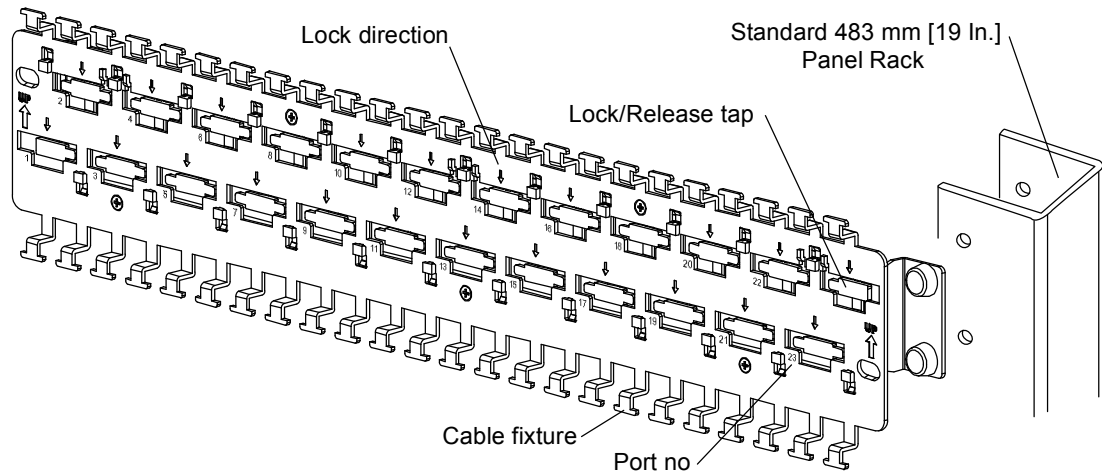


Mount the patch panel on desired location of a 19" rack as shown


Place the cable terminated Cable Coupler on desired location of the panel.

Follow the direction of ARROW sign to slide the terminated Cable Coupler until the Coupler seated into the slot and locked.



Tied up the cables on panel with supplied cable ties to complete the installation.

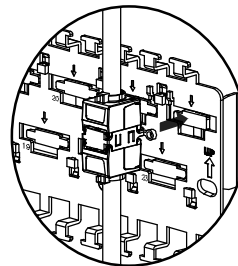


A.Positioning

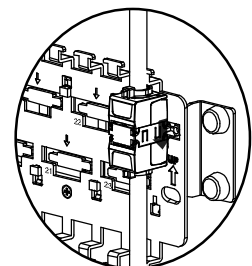

B.Sliding

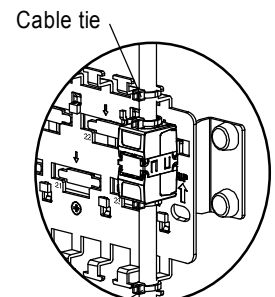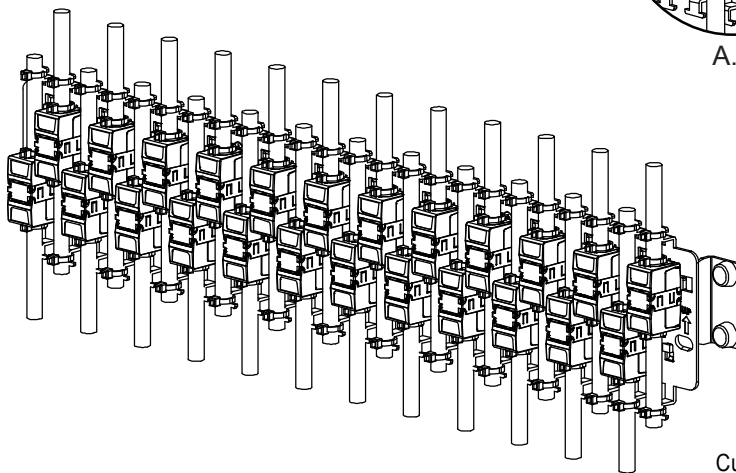

C.Fix cable tie

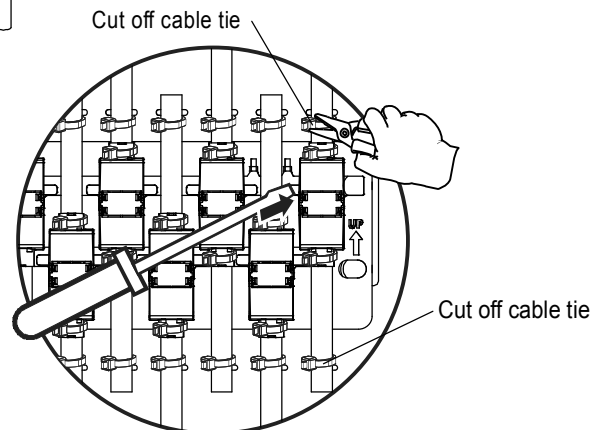

## Release the Cable Coupler from panel

Cut off the cable tie on both ends of Coupler, use a flat screw driver to press the "Lock/Release" tap, continue pressing the tap and pulling the Coupler on opposite direction of "ARROW" sign until the Coupler is released from panel.