

LTMC 96 A1CH8X12H

Minikabel mit HDPE Mantel, 96 Fasern, A-DQ(ZN)2Y HDPE, G.657.A1, CH

Features

- Singlemode, biegeunempfindliche G.657A1 Faser
- Aussenmantel besteht aus HDPE (High Density Polyethylen)
- Metrierung am Kabel, inkl. Beschreibung via Inkjetdruck
- Faserbündel mit Wasserabweisenden Gel gefüllt
- Metallfreie Konstruktion
- Einblasfähig in Mikrorohrsysteme
- Geeignet für Anwendungen im Aussenbereich
- UV Beständig nach ISO 4892/2
- Zugentlastung durch Aramidgarn




Color Code of the Fiber

1 Red	2 Green	3 Blue	4 Yellow	5 White	6 Grey
7 Brown	8 Violet	9 Aqua	10 Black	11 Orange	12 Pink

SWISS Color Code of the Loose Tube and Filler ≤12 Tubes

1 Red	2 Green	3 White	4 White	5 White	6 White
7 White			8 White		

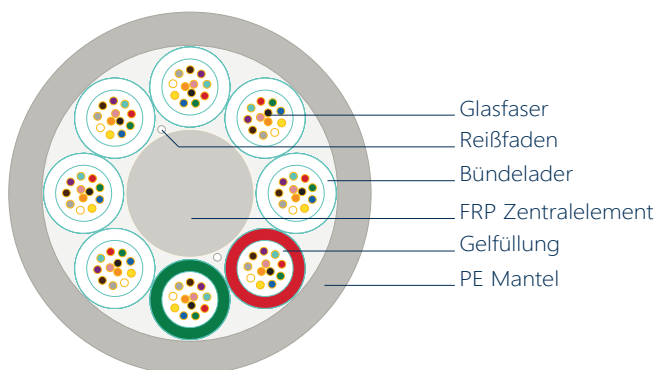

LTMC 96 A1CH8X12H

Minikabel mit HDPE Mantel, 96 Fasern, A-DQ(ZN)2Y HDPE, G.657.A1, CH

Dimensions and Descriptions		
Item	contents	96
Loose Tube	Number	8
	Outer diameter $\pm 0.1\text{mm}$	1,45
Filler	Number	-
Fiber counts per Tube		12
Fiber type		G657A1 250um
Central strength member	Material	FRP
	Diameter (mm)	2,4
	Diameter of PE lay	-
Outer sheath	Material	HDPE
	Color	Black
	Thickness (mm)	Approx.0.5
Cable diameter($\pm 0.2\text{mm}$)		6,1
Cable weight (kg/km) Approx.		36
Max. tensile strength (N)		800
Crush (N/100mm)		Short term: 500 Long term: 200

LTMC 96 A1CH8X12H

Minikabel mit HDPE Mantel, 96 Fasern, A-DQ(ZN)2Y HDPE, G.657.A1, CH

Mechanical, Physical and Environmental Test Characteristics

Remark: "No attenuation changes" is considered as the attenuation changes ≤ 0.05 dB

Items	Test Method	Requirements
Tensile performance	IEC 60794-1-2-E1 Load: according to short term tensile described Cable length under tension: Not less than 50m. Duration of load sustain: 1min. Velocity of transfer device: 10mm/min	The maximum increase in attenuation less than 0.1dB. The maximum fiber strain less than 0.6% under maximum tensile short term load. No change in attenuation after test at 1550nm. Under visual examination without magnification, no damage to the sheath or to the cable elements after test.
Crush	IEC 60794-1-2-E3 Load: 500N Duration of load: 1min	No change in attenuation after test at 1550nm. Under visual examination without magnification, no damage to the sheath or to the cable elements. The imprint of the striking surface on the sheath is not considered mechanical damage
Bend	IEC 60794-1-2-E11A Mandrel radius: \varnothing 10 times cable diameter Turns:10 Cycles:5	No change in attenuation at 1550nm after test. Under visual examination without magnification, no damage to the sheath or to the cable elements.
Repeated bending	IEC 60794-1-2-E6 Bending radius: 20 times cable diameter Cycles: 25 Load: 25N Duration of cycle: Approximately 2s.	No change in attenuation at 1550nm after test. Under visual examination without magnification, no damage to the sheath or to the cable elements.
Torsion	IEC 60794-1-2-E7 Cycles:5 Length under test: 1m Turns: $\pm 180^\circ$ Load: 40N	The variation on attenuation for each fiber less than 0.05dB at 1550nm Under visual examination without magnification, no damage to the sheath or to the cable elements. No permanent change in attenuation after test
Temperatur cycling	IEC 60794-1-2-F1 Sample length: at least 1000m Temperature range: $-30^\circ\text{C}+70^\circ\text{C}$ Cycles: 2 Temperature cycling test dwell time: 12 hours	There is no change in attenuation coefficient at 1550nm after the test.
WaterPenetration	IEC 60794-1-2-F5B Time: 24 hours Sample length: 3m Water height: 1m	No water leakage
Compound flow	IEC 60794-1-2-E14 Sample count: 5 Sample length: 300 ± 5 mm, Remove length: $130\pm 2,5$ mm, Time: 24h	No filling compound dripped.
Other parameters	According to IEC 60794 ,YD/T 1460.4-2006	