


LTMC 288 A1DIN24X12PA

Minikabel mit PA Mantel, 288 Fasern, A-DQ(ZN)4Y PA, G.657.A1, DIN

Features

- Singlemode, biegeunempfindliche G.657A1 Faser
- Aussenmantel besteht aus Polyamid - bessere Einblaseigenschaften als HDPE durch höhere Festigkeit
- Metrierung am Kabel, inkl. Beschreibung via Inkjetdruck
- Faserbündel mit Wasserabweisenden Gel gefüllt
- Metallfreie Konstruktion
- Einblasfähig in Mikrorohrsysteme
- Geeignet für Anwendungen im Aussenbereich
- UV Beständig nach ISO 4892/2
- Zugentlastung durch Aramidgarn

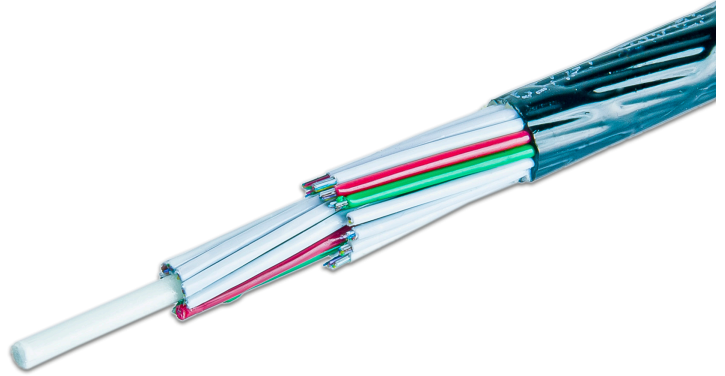

Color Code of the Fiber


1 Red	2 Green	3 Blue	4 Yellow	5 White	6 Grey
7 Brown	8 Violet	9 Aqua	10 Black	11 Orange	12 Pink
13 Red w/ black ring	14 Green w/ black ring	15 Blue w/ black ring	16 Yellow w/ black ring	17 White w/ black ring	18 Grey w/ black ring
19 Brown w/ black ring	20 Violet w/ black ring	21 Aqua w/ black ring	22 Natural w/ black ring	23 Orange w/ black ring	24 Pink w/ black ring

DIN Color Code of the Loose Tube and Filler 24 Tubes

Inner 1 Red	Inner 2 Green	Inner 3 Blue	Inner 4 Yellow	Inner 5 White	Inner 6 Grey
Inner 7 Brown	Inner 8 Violet	Inner 9 Aqua	Outer 1 Red with black stripe	Outer 2 Green w/ black stripe	Outer 3 Blue with black stripe
Outer 4 Yellow w/ black stripe	Outer 5 White w/ black stripe	Outer 6 Grey with black stripe	Outer 7 Brown w/ black stripe	Outer 8 Violet w/ black stripe	Outer 9 Aqua w/ black stripe
Outer 10 Black w/ white stripe	Outer 11 Orange w/ black stripe	Outer 12 Pink w/ black stripe	Outer 13 Red w/ yellow stripe	Outer 14 Green w/ yellow stripe	Outer 15 Blue w/ yellow stripe

LTMC 288 A1DIN24X12PA

Minikabel mit PA Mantel, 288 Fasern, A-DQ(ZN)4Y PA, G.657.A1, DIN

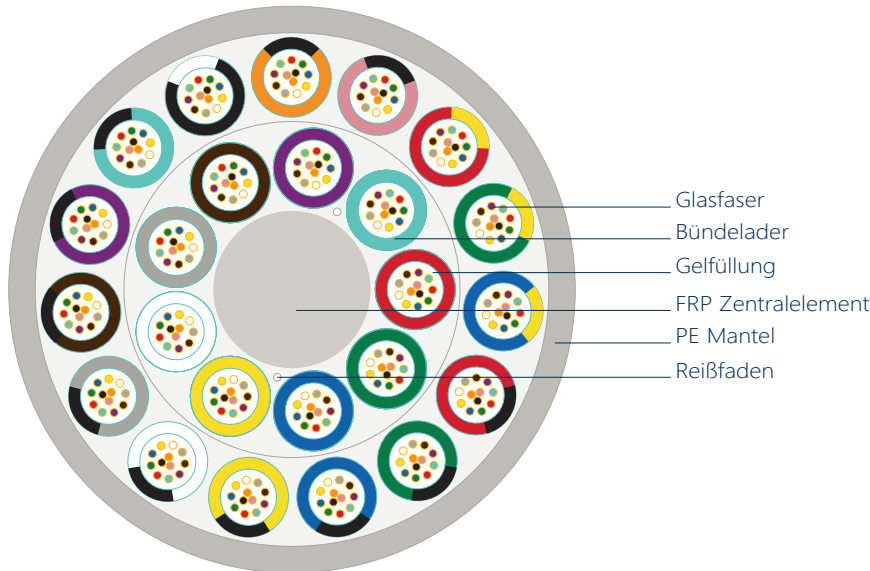

Dimensions and Descriptions

Item	contents	288
Loose Tube	Number	24
	Outer diameter ±0.1mm	1,45
Filler	Number	-
Fiber counts per Tube		12
Fiber type		G657A1 250um
Central strength member	Material	FRP
	Diameter (mm)	2,8
	Diameter of PE lay	-
Outer sheath	Material	PA12
	Color	Black
	Thickness (mm)	Approx.0.5
Cable diameter(±0.2mm)		9,3
Cable weight (kg/km) Approx.		80
Max. tensile strength (N)		1000
Crush (N/100mm)		Short term: 500 Long term: 200

LTMC 288 A1DIN24X12PA

Minikabel mit PA Mantel, 288 Fasern, A-DQ(ZN)4Y PA, G.657.A1, DIN

Mechanical, Physical and Environmental Test Characteristics

Remark: "No attenuation changes" is considered as the attenuation changes ≤ 0.05 dB

Items	Test Method	Requirements
Tensile performance	IEC 60794-1-2-E1 Load: according to short term tensile described Cable length under tension: Not less than 50m. Duration of load sustain: 1min. Velocity of transfer device: 10mm/min	The maximum increase in attenuation less than 0.1dB. The maximum fiber strain less than 0.6% under maximum tensile short term load. No change in attenuation after test at 1550nm. Under visual examination without magnification, no damage to the sheath or to the cable elements after test.
Crush	IEC 60794-1-2-E3 Load: 500N Duration of load: 1min	No change in attenuation after test at 1550nm. Under visual examination without magnification, no damage to the sheath or to the cable elements. The imprint of the striking surface on the sheath is not considered mechanical damage
Bend	IEC 60794-1-2-E11A Mandrel radius: \varnothing 10 times cable diameter Turns:10 Cycles:5	No change in attenuation at 1550nm after test. Under visual examination without magnification, no damage to the sheath or to the cable elements.
Repeated bending	IEC 60794-1-2-E6 Bending radius: 20 times cable diameter Cycles: 25 Load: 25N Duration of cycle: Approximately 2s.	No change in attenuation at 1550nm after test. Under visual examination without magnification, no damage to the sheath or to the cable elements.
Torsion	IEC 60794-1-2-E7 Cycles:5 Length under test: 1m Turns: $\pm 180^\circ$ Load: 40N	The variation on attenuation for each fiber less than 0.05dB at 1550nm Under visual examination without magnification, no damage to the sheath or to the cable elements. No permanent change in attenuation after test
Temperatur cycling	IEC 60794-1-2-F1 Sample length: at least 1000m Temperature range: $-30^\circ\text{C}+70^\circ\text{C}$ Cycles: 2 Temperature cycling test dwell time: 12 hours	There is no change in attenuation coefficient at 1550nm after the test.
WaterPenetration	IEC 60794-1-2-F5B Time: 24 hours Sample length: 3m Water height: 1m	No water leakage
Compound flow	IEC 60794-1-2-E14 Sample count: 5 Sample length: 300 ± 5 mm, Remove length: $130\pm 2,5$ mm, Time: 24h	No filling compound dripped.
Other parameters	According to IEC 60794 ,YD/T 1460.4-2006	