
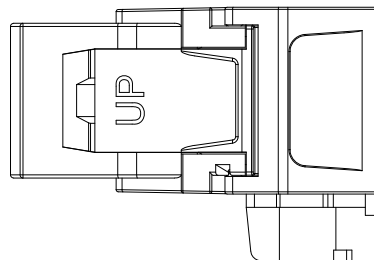

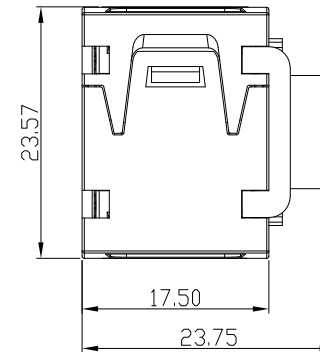
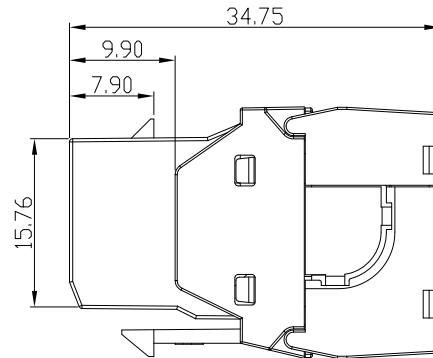
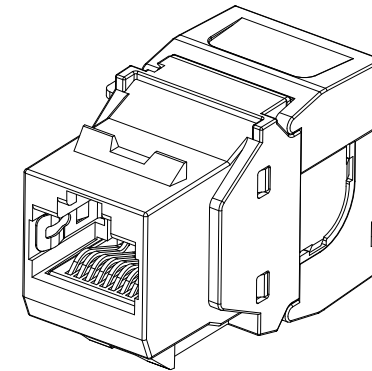


DEGREE CLASS	A	B	C	D
10	±0.02	±0.05	±0.10	±0.15
10~50	±0.05	±0.10	±0.15	±0.20
50~120	±0.10	±0.15	±0.20	±0.25
120~300	±0.15	±0.20	±0.25	±0.30
300~500	±0.20	±0.25	±0.30	±0.35
500~1000	±0.25	±0.30	±0.35	±0.40
1000~1500	±0.30	±0.35	±0.40	±0.45
ANGEL	±0.2°	±0.5°	±1.0°	±1.5°

ZONE	REV.	DESCRIPTION	DATE	APPROVED

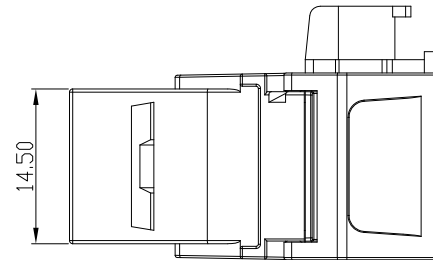

ELECTRICAL
 10G Shielded Keystone Jack-Side entry
 CURRENT RATING : 1.5A
 DIELECTRIC WITHSTANDING VOLTAGE : 1000VAC 60HZ
 INSULATION RESISTANCE : 500 MΩ MIN.
 CONTACT RESISTANCE : 20 mΩ MAX.
MECHANICAL
 (1) Materials: Zn alloy + Nickel Plated
 (2) RJ45Jack Contact:Phosphor bronze, 50u" Gold Plating
 (3) Cavity conforms to FCC rules and Regulations Part 68

Wirewin®
 European Cabling Solutions

MODEL:	TITLE:		ELMA 1 ☒ ELMA2 ☐	
WKS JACK KAT6A STP 90	PART NO.	UNIT	MM	
DRAWN:	MATERIAL	SCALE	1:1	
DESIGNED:	FINISH	SHEET	1 OF 1	
CHECKED:	TOOLING NO.	SIZE	A4	REV. A
APPROVED:	DWG NO.			