


CAT6 LightPatch Cord round, U/FTP, Ø 3.8mm, red

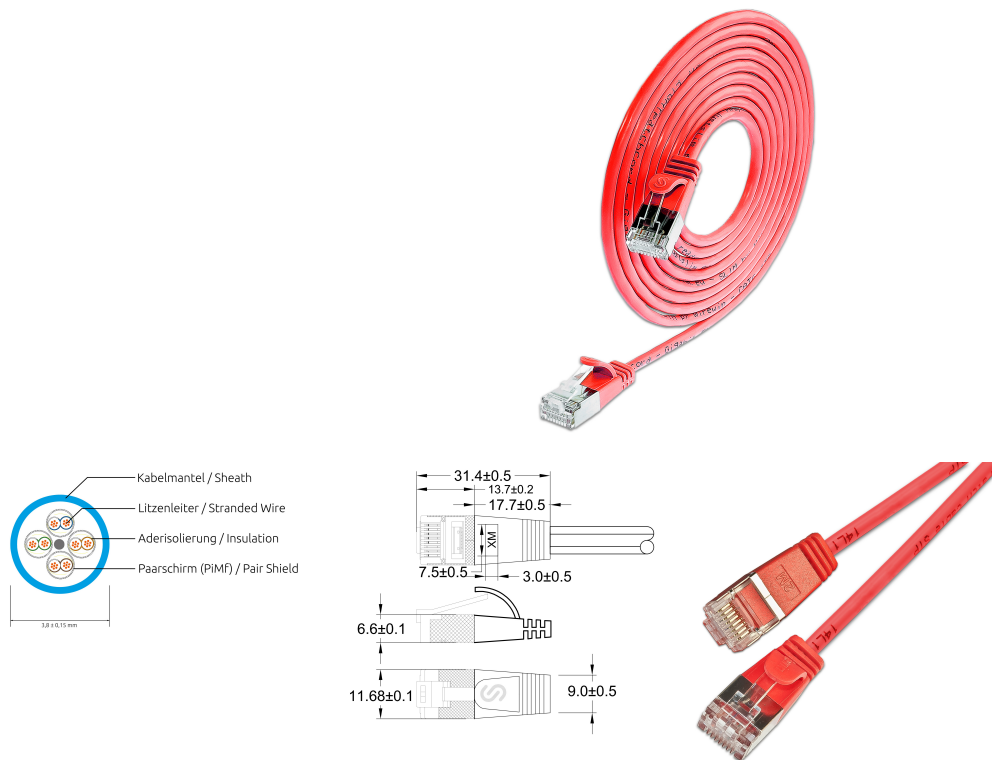

**DESCRIPTION**

The LIGHTpatchcords from the trademark SLIM® are the solution for many problems of structured cabling. Even if they look quite similar to a usual copper patchcable, they reach a category 6 performance and are suitable to all 10BASE-T-, 100BASE-TX- und 1000BASE-T applications, including gigabit ethernet. 3 LIGHTpatchcords do have the same diameter as a usual category 6 copper patchcord. Despite the extremely thin design, the cable has a twisting of the individual wire pairs. In addition, it has a wide, flexible latch protection as well as a practical length print on both ends and supports Power over Ethernet (PoE IEEE802.3af).

**FEATURES**

- Category 6 patchcord
- Shield: U/FTP shielded
- 4- pairs twisted
- Wires: AWG36 100% copper
- Coating: PVC
- 12 different length
- New innovative boot design

CAT6 LightPatch Cord round, U/FTP, Ø 3.8mm, red

**PRODUCT FEATURES**

Fire retardant version	No
AWG-size	AWG36
Pining	TIA/EIA 568 B
Color	Red
Colour anti-kink sleeve	Red
Halogen free according to EN IEC 60754-1	No
Halogen free according to EN IEC 60754-2	No
Halogen free according to EN IEC 60754-3	No
Cable construction	4x2
Cable Structure	Ø 3.8 mm
Cable Type	U/FTP
Category	CAT.6
Anti-kink sleeve	Moulded-on
Copper Cable Construction	4x2xAWG36/7
Length	0.15 m / 0.25 m / 0.5 m / 1 m / 1.5 m / 10 m / 15 m / 2 m / 20 m / 3 m / 5 m / 7.5 m
Coating	PVC
Color outer sheath	Red
Oil resistant according to EN IEC 60811-404	No
Pin assignment	1:1
Locking lever	Yes
Shield	U/FTP shielded
Type of Connector Connection 1	RJ45 8(8)
Type of Connector Connection 2	RJ45 8(8)

**APPLICATION**

Typical application areas for the LIGHTpatchcords:

- Overfilled server or network cabinets or cable channels
- Telephone system or switches with high port densities. With very short cables, you could easily patch from switch to switch or switch to panel without cable routing
- Connection of VoIP telephones because they are extremely flexible and therefore not so difficult to lay on a desk
- Applications in industry and manufacturing where ethernet connections are required, but only little space is available
- As a patch cable in the notebook bag for technicians and field staff
- In the private environment to lay a patch cable under the carpet or the edge strip

PRODUCT NUMBER		EAN Code
PKW-LIGHT-STP-K6 0.15 RT	0.15 Meter	9120064016012
PKW-LIGHT-STP-K6 0.25 RT	0.25 Meter	9120064016098
PKW-LIGHT-STP-K6 0.5 RT	0.5 Meter	9120064016173
PKW-LIGHT-STP-K6 1.0 RT	1.0 Meter	9120064016258
PKW-LIGHT-STP-K6 1.5 RT	1.5 Meter	9120064016333
PKW-LIGHT-STP-K6 10.0 RT	10.0 Meter	9120064016418
PKW-LIGHT-STP-K6 15.0 RT	15.0 Meter	9120064016494
PKW-LIGHT-STP-K6 2.0 RT	2.0 Meter	9120064016579
PKW-LIGHT-STP-K6 20.0 RT	20 Meter	9120064016654

---

CAT6 LightPatch Cord round, U/FTP, Ø 3.8mm, red

---

PKW-LIGHT-STP-K6 3.0 RT	3.0 Meter	9120064016739
PKW-LIGHT-STP-K6 5.0 RT	5.0 Meter	9120064016814
PKW-LIGHT-STP-K6 7.5 RT	7.5 Meter	9120064019259