


LIMITS	DEGREE CLASS			
	A	B	C	D
10	±0.02	±0.05	±0.10	±0.15
10~50	±0.05	±0.10	±0.15	±0.20
50~120	±0.10	±0.15	±0.20	±0.25
120~300	±0.15	±0.20	±0.25	±0.30
300~500	±0.20	±0.25	±0.30	±0.35
500~1000	±0.25	±0.30	±0.35	±0.40
1000~1500	±0.30	±0.35	±0.40	±0.45
ANGEL	±0.2°	±0.5°	±1.0°	±1.5°



ZONE	REV.	DESCRIPTION	DATE	APPROVED
A3,B4	A	INITIAL RELEASE		

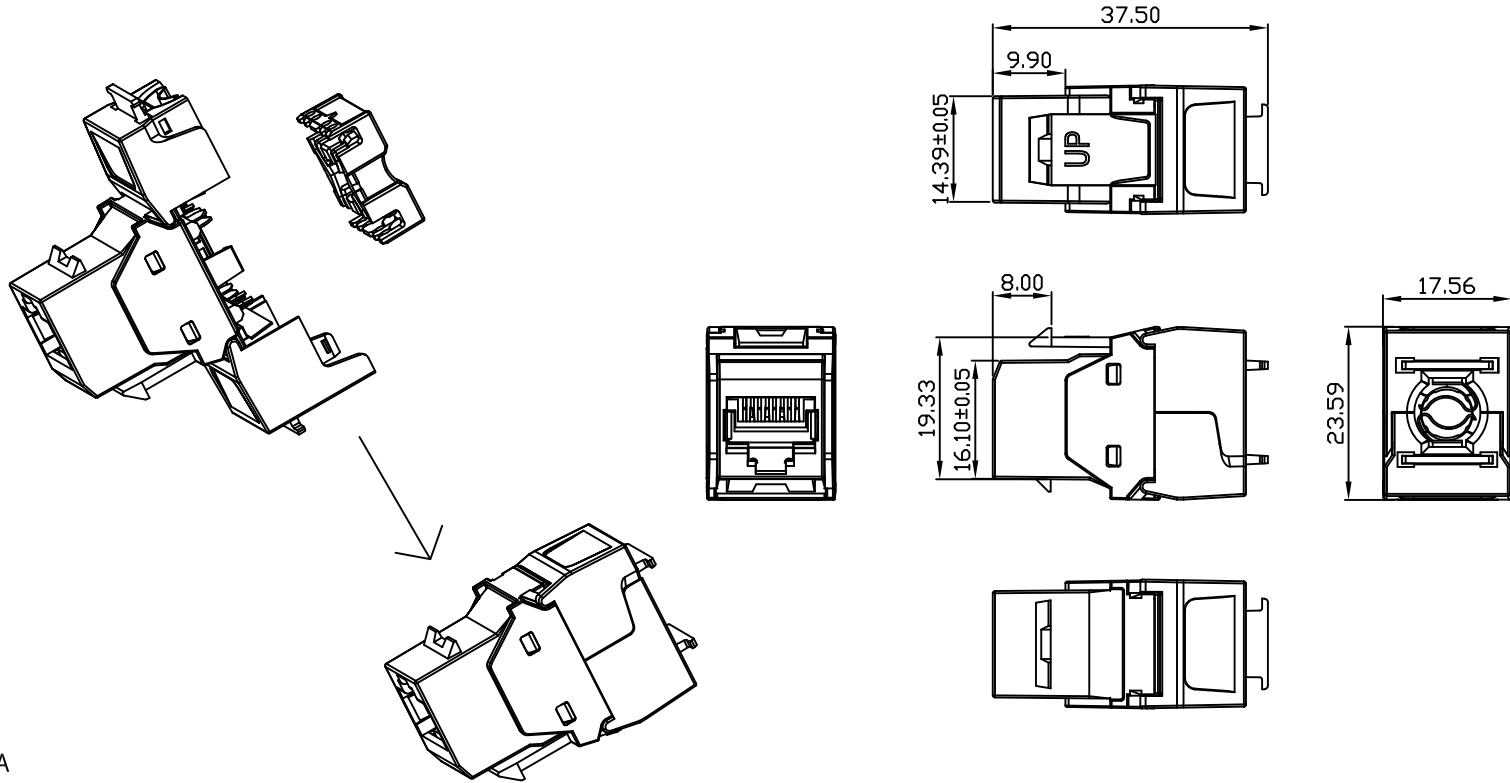

**ELECTRICAL**  
 CURRENT RATING : 1.5A  
 DIELECTRIC WITHSTANDING VOLTAGE : 1000VAC 60Hz  
 INSULATION RESISTANCE : 500M Ω MIN.  
 CONTACT RESISTANCE : 20m Ω MAX.

**MECHANICAL**  
 (1) Materials: UV stabilized PC+ABS, polycarbonate  
 (2) RJ45 Jack Contact: Phosphor bronze, 50u" Glod plating  
 (3) Cavity conforms to FCC rules and Regulations Part 68

MODEL:	TITLE: <b>Wirewin</b> European Cabling Solutions		WKS JACK KAT6A	
		ELMA 1 <input checked="" type="checkbox"/>	ELMA2 <input type="checkbox"/>	
DRAWN:	PART NO.		UNIT	MM
DESIGNED:	MATERIAL		SCALE	1 : 1
CHECKED:	FINISH		SHEET	1 OF 1
	TOOLING NO.		SIZE	A4
APPROVED:	DWG NO.		REV.	A