

## DS-1331HZ-R


### Heat-Resistant Outdoor Housing



#### Feature

- Side-cover design for convenient installation and maintenance
- Stainless steel dual-hasp design, up to IP 66
- Built-in refrigeration module with 20,000 hours life span
- Applicable to high temperature places, e.g. steel plant, and thermal power plant

#### Dimension and Wiring

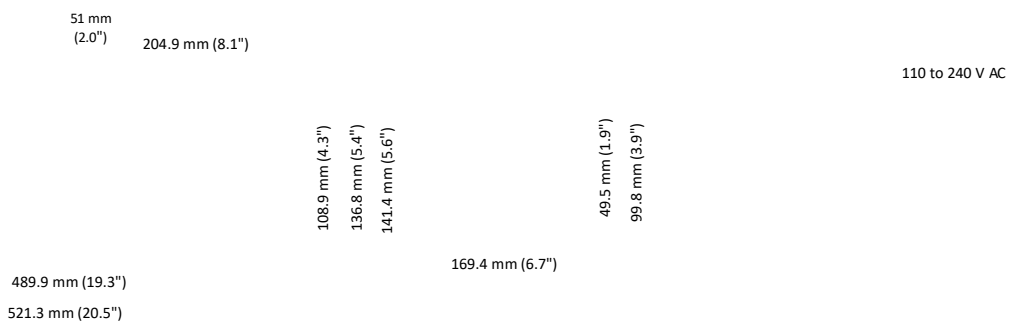

#### Accessory



DS-1293ZJ Wall Mounting Bracket



DS-1214ZJ Horizontal Pole Mounting Bracket



DS-1269ZJ Pendant Mounting Bracket



DS-1233ZJ Column Mounting Bracket

#### Available Model

DS-1331HZ-R

#### Parameter

Model	DS-1331HZ-R
Parameters	Heat-Resistant Outdoor Housing
Working Temperature	-30° C to 85° C (-22° F to 185° F)
Temperature Control	Refrigeration model enabled, when housing's temperature is over 45° C (113° F)
Power	110 to 240 V AC
Power Consumption	70 W
Material	Main: aluminum alloy
Ingress Protection	IP 66
Dimension	489.9 mm × 169.4 mm × 99.8 mm (19.3" × 6.7" × 3.9")
Weight	3.2 Kg (7.1 lb.)