

RG-RAP72Pro-OD

BE5040 Wi-Fi 7 Indoor/Outdoor Versatile Access Point




Highlights

- AI-Powered Wi-Fi 7 Versatile Outdoor/Indoor Mesh AP
- Wall or Pole Mounting to Fit in Any Location
- IP65 Weatherproof Rating, Delivering Consistent Protection and Signal Stability
- Built-in Antennas for Coverage Where Needed
- Tailored for Retail Businesses with Reyee Mesh, Standalone Portal, and AI Roaming

Features

Highlight Features

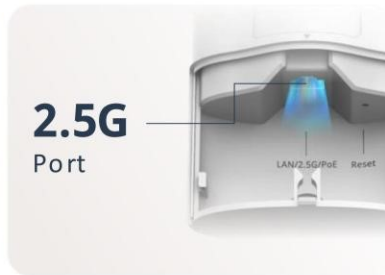

Highlight Features



Elegant Design with Cutting-Edge Core



Highlight Features



MLO on, latency lower avg.
55.19 %
with the same interference, compared to a single 5 GHz band.

MLO on, avg. loss rate reduced by
35.71 %
with the same interference, compared to a single 5 GHz band.

Speed test
2.3G
Maximize transmission performance.

Wi-Fi 7's MLO technology leverages multiple frequency bands, allowing clients to connect to the optimal band for better performance.



Preamble Puncturing technology




Measured Performance
250 % ↑
with 983Mbps
without 280Mbps

*Actual test under adjacent interference of 40% 20 MHz bandwidth, showing that preamble puncturing technology can achieve up to 250% performance improvement.

Preamble Puncturing technology blocks interference-affected channels and enables cross-frequency bonding of uninterrupted channels, improving overall channel utilization by up to 7 times.

Highlight Features

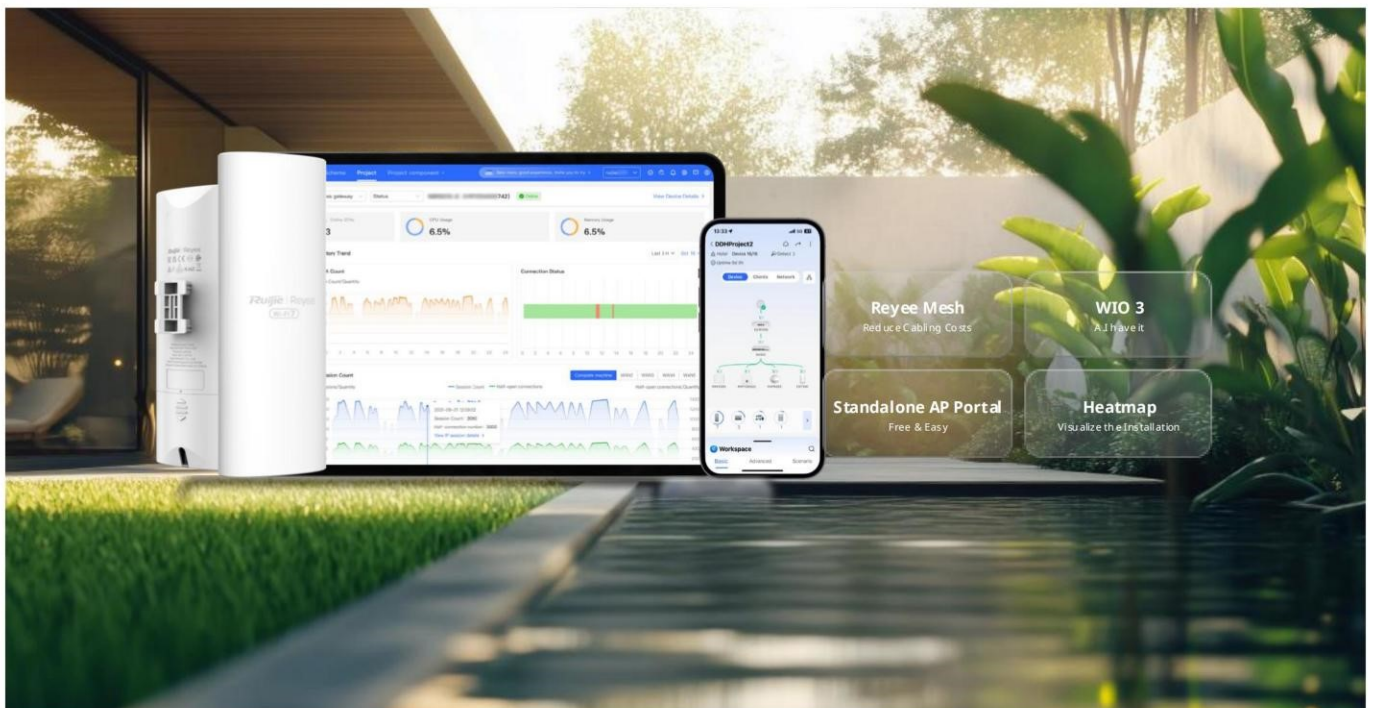

Product Information

Model	RG-RAP72Pro-OD
Product Type	Outdoor

Hardware Specifications

Model	RG-RAP72Pro-OD
Wi-Fi Radio	
6 GHz Wi-Fi	No
5 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11a/n) Wi-Fi 5 (IEEE 802.11ac) Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 7 (IEEE 802.11be)
2.4 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11b/g/n) Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 7 (IEEE 802.11be)
Operating band	IEEE 802.11b/g/n/ax/be, 2.400 GHz to 2.4835 GHz IEEE 802.11a/n/ac/ax/be, 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz Note: Available bands vary with countries and regions. To use the preceding frequency bands, ensure that your country or region supports these frequency bands.
Radio design	Dual-radio 5 spatial streams ● 2.4 GHz: 2 x 2, MU-MIMO ● 5 GHz: 3 x 3, MU-MIMO
FEM	2.4 GHz: 2 x eFEM 5 GHz: 3 x eFEM
6 GHz channel width	No
5 GHz channel width	Auto/20/40/80/160 MHz
2.4 GHz channel width	Auto/20/40 MHz
Maximum wireless data rate	5011 Mbps
6 GHz wireless data rate	No
5 GHz wireless data rate	4323 Mbps

Hardware Specifications

Model	RG-RAP72Pro-OD
2.4 GHz wireless data rate	688 Mbps
Maximum transmit power	<p>Frequency bands and maximum Effective Isotropic Radiated Power (EIRP):</p> <p>Note: Country specific restrictions apply.</p> <p>European Union & United Kingdom 2400–2483.5 MHz, EIRP ≤ 20 dBm 5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>United States: 2400–2483.5 MHz, max. output power ≤ 30 dBm & EIRP ≤ 36 dBm 5150–5250 MHz, max. output power ≤ 30 dBm & EIRP ≤ 36 dBm 5250–5350 MHz, max. output power < 24 dBm & EIRP ≤ 30 dBm 5470–5725 MHz, max. output power < 24 dBm & EIRP ≤ 30 dBm 5725–5850 MHz, max. output power ≤ 30 dBm & EIRP ≤ 36 dBm</p> <p>Myanmar: 2400–2483.5 MHz, EIRP ≤ 23 dBm 5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Thailand: 2400–2483.5 MHz, EIRP ≤ 20 dBm 5470–5725 MHz, EIRP ≤ 30 dBm 5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Indonesia: 2400–2483.5 MHz, EIRP ≤ 36 dBm 5725–5825 MHz, EIRP ≤ 36 dBm</p> <p>Egypt: 2400–2483.5 MHz, EIRP ≤ 20 dBm 5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>Vietnam: 2400–2483.5 MHz, EIRP ≤ 23 dBm 5150–5350 MHz, EIRP ≤ 23 dBm 5470–5725 MHz, EIRP ≤ 30 dBm 5725–5850 MHz, EIRP ≤ 30 dBm</p>
Maximum transmit power (6 GHz)	No
Maximum transmit power (5 GHz)	<p>Combined power: 27.7 dBm (single-stream power: 23 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>
Maximum transmit power (2.4 GHz)	<p>Combined power: 26 dBm (single-stream power: 23 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>
Coverage range	<p>5 GHz max: 300 m (984.25 ft.)</p> <p>2.4 GHz max: 100 m (328.08 ft.)</p>

Hardware Specifications

Model	RG-RAP72Pro-OD
	<p>5 GHz recommended: 150 m (492.13 ft.) 2.4 GHz recommended: 50 m (164.04 ft.)</p> <p>Note: The data is obtained in an ideal environment without obstruction. The signal coverage radius depends on client performance and environmental interference.</p>
Modulation	<p>OFDM: BPSK @ 6/9 Mbps, QPSK @ 12/18 Mbps, 16-QAM @ 24 Mbps, and 64-QAM @ 48/54 Mbps DSSS: DBPSK @ 1 Mbps, DQPSK @ 2 Mbps, and CCK @ 5.5/11 Mbps MIMO-OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM, and 4096-QAM OFDMA</p>
Receive sensitivity	<p>11b: -91 dBm (1 Mbps), -88 dBm (5.5 Mbps), -85 dBm (11 Mbps) 11a/g: -89 dBm (6 Mbps), -80 dBm (24 Mbps), -76 dBm (36 Mbps), -71 dBm (54 Mbps) 11n: -83 dBm (MCS0), -65 dBm (MCS7), -83 dBm (MCS8), -65 dBm (MCS15) 11ac: 20 MHz: -83 dBm (MCS0), -57 dBm (MCS9) 11ac: 40 MHz: -79 dBm (MCS0), -57 dBm (MCS9) 11ac: 80 MHz: -76 dBm (MCS0), -51 dBm (MCS9) 11ac: 160 MHz: -76 dBm (MCS0), -50 dBm (MCS9) 11ax: 20 MHz: -85 dBm (MCS0), -58 dBm (MCS11) 11ax: 40 MHz: -82 dBm (MCS0), -54 dBm (MCS11) 11ax: 80 MHz: -79 dBm (MCS0), -52 dBm (MCS11) 11ax: 160 MHz: -76 dBm (MCS0), -49 dBm (MCS11) 11be: 20 MHz: -85 dBm (MCS0), -52 dBm (MCS13) 11be: 40 MHz: -82 dBm (MCS0), -49 dBm (MCS13) 11be: 80 MHz: -82 dBm (MCS0), -46 dBm (MCS13) 11be: 160 MHz: -79 dBm (MCS0), -44 dBm (MCS13)</p>
Antenna	
Antenna	<p>5 GHz: 1 built-in omnidirectional antenna Integrated 2.4 GHz and 5 GHz: 2 built-in omnidirectional antennas</p>
Antenna horizontal orientation	No
Antenna vertical orientation	No
Antenna gain (6 GHz)	No
Antenna gain (5 GHz)	6.28 dBi
Antenna gain (2.4 GHz)	3.62 dBi

Hardware Specifications

Model	RG-RAP72Pro-OD
Dimensions and Weight	
Product dimensions (W x D x H)	90 mm x 46 mm x 239 mm (3.54 in. x 1.81 in. x 9.41 in.) (excluding the mounting bracket)
Color	White
Weight	≤ 0.7 kg (1.54 lbs.) (without packaging materials)
Shipping weight	≤ 1 kg (2.20 lbs)
Port Specifications	
Number of 10/100/1000/2500BASE-T ports	1
Reset button	1
LEDs	1 x system status LED
Power Supply and Consumption	
Power supply	PoE/PoE+
Local power supply	No
Dimensions of the DC connector	No
PoE In standard	<ul style="list-style-type: none">• IEEE 802.3af (PoE) Note: Radio transmission and reception is limited to 1T1R at 2.4 GHz and 2T2R at 5 GHz. <ul style="list-style-type: none">• IEEE 802.3at (PoE+)
PoE budget	No
Maximum power consumption	21 W
Environment and Reliability	
Operating temperature	-30°C to +65°C (-22°F to +149°F)
Storage temperature	-40°C to +85°C (-40°F to +185°F)
Operating humidity	0% RH to 100% RH (non-condensing)
Storage humidity	0% RH to 100% RH (non-condensing)
Mounting options	Wall/Pole

Hardware Specifications

Model	RG-RAP72Pro-OD
IP rating	IP65
Surge protection	Ethernet port: ± 4 kV for common mode
MTBF	400,000 hours
Certification and Regulatory Compliance	
RoHS	Yes
Safety compliance	EN 62368-1
EMC	EN 55032 EN 55035 EN IEC 61000-3-2 EN 61000-3-3 EN 301489-1 EN 301489-3 EN 301489-17
RF	EN 300 328 EN 301 893 EN 300 440 Draft EN 303 687
Certification	CE, FCC, CB, ISED, cTUVus
System Specifications	
Flash memory	256 MB
RAM	512 MB DDR3

Software Specifications

Model	RG-RAP72Pro-OD
Basic Configurations	
AP mode	Yes
Routing mode	Yes
Internet access mode	Static IP address Static IPv6 address Dynamic IP address Dynamic IPv6 address PPPoE
Interface	
IPTV transparent transmission	No
Ethernet Interface	
PPPoE clients	Yes
Ethernet Switching	
IEEE 802.1Q VLAN	Yes
WLAN	
Maximum number of associated wireless clients	64 (2.4 GHz) 511 (5 GHz) 511 (2.4 GHz and 5 GHz enabled)
Recommended number of associated wireless clients	<ul style="list-style-type: none"> ● Support for IEEE 802.11ax and 160 MHz: <ul style="list-style-type: none"> 16 (2.4 GHz) 94 (5 GHz) 110 (2.4 GHz and 5 GHz enabled) ● Support for IEEE 802.11ax and 80 MHz: <ul style="list-style-type: none"> 16 (2.4 GHz) 64 (5 GHz) 80 (2.4 GHz and 5 GHz enabled) <ul style="list-style-type: none"> ● Support for IEEE 802.11ac: <ul style="list-style-type: none"> 8 (2.4 GHz) 32 (5 GHz) 40 (2.4 GHz and 5 GHz enabled)
Maximum number of SSIDs	8
Radio-based client limiting	Yes
Layer 2 isolation	Yes

Software Specifications

Model	RG-RAP72Pro-OD
OFDMA	Yes
WMM	Yes
DFS	Yes
MLO	Yes
4K-QAM	Yes
Different SSIDs for the same VLAN	Yes
Enabling/Disabling MLO	Yes
AP load balancing	Yes
Beamforming	Yes
802.11k/v roaming	Yes
Fast transition (802.11r)	Yes
Layer 2 roaming	Yes
Layer 3 roaming	Yes
AI roaming	Yes
PSK authentication	Yes
Static allowlist	Yes
Adjusting the transmit power for beacon and probe frames	Yes
Encryption mode (WPA-PSK, WPA2-PSK, WPA/WPA2-PSK)	Yes
OWE (Enhanced Open) WPA3-SAE WPA2-PSK/WPA3-SAE	Yes
Number of blocklists and allowlists based on MAC addresses (single SSID)	256
Number of global blocklists/allowlists	256

Software Specifications

Model	RG-RAP72Pro-OD
Mesh management	Yes
AP Mesh	Yes
AP portal authentication	Yes
Maximum number of devices that can be managed	300
One-Click Network Optimization	Yes
Static blacklist	Yes
IP Service	
ARP binding	Yes
IPv4 ping	Yes
IPv6 ping	Yes
Traceroute	Yes
Static/Dynamic NAT	Yes
DHCP server	Yes
Authentication	
802.1X authentication	Yes
Network Management and Monitoring	
Wireless repeater mode	Yes
Web login information	Single-device login address: 10.44.77.254 Network-wide login address: 10.44.77.253 Default password: admin
Network-wide configuration and management	Yes
Ruijie Reyee App management	Yes
eWeb management	Yes
Ruijie Cloud management	Yes
SNMP	Yes

Software Specifications

Model	RG-RAP72Pro-OD
Configuration synchronization among the app, eWeb, and Ruijie Cloud	Yes
Displaying device information on Ruijie Cloud	Yes

Package Contents

Model	RG-RAP72Pro-OD
Package Contents	
Package Contents	1 x AP 1 x Mounting bracket 1 x Metal hose clamp 2 x Cross pan head screws (ST3.5 x 25 mm) 2 x Plastic expansion anchors (ϕ 6 x 25 mm) 1 x User Manual 1 x Warranty Card
Accessories	
Power adapter	No

Ruijie | **Reyee**

 **R**edefine **y**our **e**asy **n**etwork



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>