

Highlights

Family of 10Gb/100Gb Switches with Advanced Enterprise Capabilities


- Full featured ExtremeXOS® operating system with advanced features supporting switching, routing, and VXLAN
- Controlling aggregation switch for V400 edge devices with Extreme's Extended Edge Switching
- High-density 10Gb aggregation applications
- Non-blocking 880 Gbps switching capacity per system

Ease of Use — Flexible Management Options

- Enterprise Extreme Management Center application support
- Advanced command line interface
- Zero Touch Provisioning (ZTP+)
- Integrated web based management application

Flexible System Configurations

- Wide range of port speeds from 1Gb, 10Gb, 25Gb, 40Gb, 50Gb, and 100Gb
- Fiber SFP+ and copper 10GBASE-T models
- Hot-swappable modular power and fans
- AC and DC power supply options
- Front to Back and Back to Front air flow options
- Redundancy options for high availability

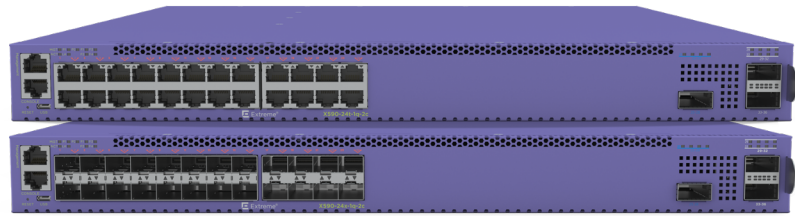

ExtremeSwitching™ X590

High-performance 24-port 10Gb aggregation switch.

Product Overview

Advanced 10Gb Enterprise LAN Aggregation Switch

The ExtremeSwitching X590 Series products are purpose-built 24-port 10Gb/100Gb switches designed for high-performance enterprise and aggregation applications. The X590 can support a range of interface speeds, including 1Gb, 10Gb, 25Gb, 40Gb, 50Gb and 100Gb, all in a compact 1RU form factor. This enables the ExtremeSwitching X590 to be flexibly deployed in Enterprise LAN or top-of-rack applications.

The X590 can also serve as the controlling aggregation switch within Extreme's Extended Edge Switching solution.

Two models of the X590 are available:

X590-24x-1q-2c

- 24 x 1Gb/10Gb SFP+ ports
- 1 x 10Gb/40Gb QSFP+ port (available in stack mode only)
- 2 x 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports

X590-24t-1q-2c

- 24 x 100Mb/1Gb/10Gb 10GBASE-T ports
- 1 x 10Gb/40Gb QSFP+ port (available in stack mode only)
- 2 x 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports

Flexible Deployment Options

The X590 can handle a range of high bandwidth applications, including high-density 10Gb top of rack aggregation, as well as spine/leaf deployments as an edge leaf switch. With both copper and fiber high-density 10Gb port options, the X590 can flexibly accommodate a variety of data center needs. It can also flexibly support uplinks at 25Gb, 40Gb, 50Gb or even 100Gb rates. A range of SFP+ and QSFP+ optical transceivers are available to support 1Gb, 10Gb and 40Gb Ethernet, while QSFP28 optical transceivers can be used to support 25Gb, 50Gb and 100Gb Ethernet applications.

ExtremeXOS Intelligent L2/L3 Switching

The ExtremeSwitching X590 family supports sophisticated, intelligent Layer 2 switching, as well as Layer 3 IPv4/IPv6 routing, including policy-based switching and routing. The X590 simplifies network operation with the ExtremeXOS modular operating system, which is used across a wide range of ExtremeSwitching networking products. The high availability ExtremeXOS operating system reduces operational overhead through the use of a single OS across the network.

Extended Edge Switching

The X590 supports Extreme Extended Edge Switching, an innovative solution that simplifies the deployment and operation of edge switches. With this solution, the X590 can be meshed with economical V400 Series access devices to form a single logical switch. Advanced X590 services can then be seamlessly delivered to the V400 edge switch. The result is a simplified operational model that reduces costs.

High-Performance 400Gb Stacking

The X590 supports SummitStack-V400 400Gbps high speed stacking using 2 100Gb ports, along with Extreme X690 and X870 Series switches. Up to eight (8) X590, X690 and X870 systems can be stacked via SummitStack-V400, using any of the supported 100Gb QSFP28 direct attach cables for the stacking links.

Comprehensive Network Management

Extreme Networks has developed tools that simplify and help in efficiently managing your network. The Extreme Management Center application suite provides centralized visibility and granular control of enterprise network resources end to end.

Product Specifications

Model	X590-24x-1q-2c	X590-24t-1q-2c
Ports	<ul style="list-style-type: none"> 24 1Gb/10Gb SFP+ ports 1 10Gb/40Gb QSFP+ ports 2 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports 1 x Serial console port RJ-45 1 x 10/100/1000BASE-T out-of-band management port Micro-USB Type A storage port <p>Selectable QSFP Port Configurations</p> <ul style="list-style-type: none"> 1 10Gb/40Gb QSFP+ and 2 100Gb QSFP28 SummitStack-V400 stacking ports <p>or</p> <ul style="list-style-type: none"> 2 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 (1 QSFP+ port inactive) 	<ul style="list-style-type: none"> 24 100Mb/1Gb/10Gb 10GBASE-T ports 1 10Gb/40Gb QSFP+ ports 2 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports 1 x Serial console port RJ-45 1 x 10/100/1000BASE-T out-of-band management port Micro-USB Type A storage port <p>Selectable QSFP Port Configurations</p> <ul style="list-style-type: none"> 1 10Gb/40Gb QSFP+ ports and 2 100Gb QSFP28 SummitStack-V400 stacking ports <p>or</p> <ul style="list-style-type: none"> 2 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 (1 QSFP+ port inactive)
Power Supplies	<ul style="list-style-type: none"> Modular 770W AC power supply (up to two PSUs) Modular 1100W DC power supply (up to two PSUs) Front-Back and Back-Front airflow options 	<ul style="list-style-type: none"> Modular 770W AC power supply (up to two PSUs) Modular 1100W DC power supply (up to two PSUs) Front-Back and Back-Front airflow options
Fan Modules	<ul style="list-style-type: none"> 4 fan modules Front-Back and Back-Front airflow options 	<ul style="list-style-type: none"> 4 fan modules Front-Back and Back-Front airflow options
Dimensions	<ul style="list-style-type: none"> 17.4in W / 19.2in D / 1.7in H (44.1cm / 48.8cm / 4.3cm) 	<ul style="list-style-type: none"> 17.4in W / 19.2in D / 1.7in H (44.1cm / 48.8cm / 4.3cm)
Performance	<ul style="list-style-type: none"> 880Gbps Switching Capacity / 714Mpps Forwarding Rate 	<ul style="list-style-type: none"> 880Gbps Switching Capacity / 714Mpps Forwarding Rate
CPU Memory	<ul style="list-style-type: none"> 2.4GHz Quad core CPU 4GB DDR3 ECC memory 32GB SSD memory 	<ul style="list-style-type: none"> 2.4GHz Quad core CPU 4GB DDR3 ECC memory 32GB SSD memory
Packet Buffers	12MB	12MB
MTBF	435,074 hours	337,871 hours
Operating Conditions	<p>0° - 45°C operation 10% to 95% relative humidity, non-condensing 0 - 3000 meters altitude Shock (half sine): 98 m/s² (10 G), 11 ms, 9 shocks Random vibration: 3 to 500 Hz at 1.5 G rms</p>	

Scaling and Performance

- MAC Addresses: 272K
- IPv4 LPM Entries: 256K max w/ALPM
- IPv4 Hosts:
 - with min LPM IPv4 entries: 146K
 - with max LPM IPv4 entries: 3K
- IPv6 LPM (/64) Entries: 128K max w/ALPM
- IPv6 Hosts: 32K max
- IP Multicast Groups - 4K
- IP Multicast (s,v,g) entries - 130K max
- Flexible Universal Forwarding Tables (UFT)
- 4092 user-created VLAN/VMANs
- 9216 Byte Max Packet Size (Jumbo Frame)
- 8 queues per port
- 8k ingress ACL rules
- 1K egress ACL rules
- OnePolicy and Scaling
 - Up to 24,576 authenticated policy users per switch
 - Policy Profiles: 63
 - Unique Permit/Deny Rules per switch: 1976
 - Default OnePolicy Profile
 - MAC Rules: 512
 - IPv4 Rules: 512
 - IPv6 Rules: 512
 - L2 Rules: 440

Key Features

- Data Center Bridging
 - DCBx Data Center Bridging Exchange Protocol
 - Priority Flow Control (PFC)
 - Enhanced Transmission Selection (ETS)
 - VXLAN Tunneling End Point (VTEP)
- Configurable Store & Forward and Cut Through forwarding mode
- SummitStack-V400 400Gb stacking (full duplex)
 - Stacking with up to 8 X590/X690/X870 systems

- 2 x 100Gb ports for stacking
- sFlow / Application Telemetry

IEEE 802.3 Media Access Standards

- IEEE 802.3ba / 802.3bm 40GBASE-X and 100GBASE-X
- IEEE 802.3ae 10GBASE-X
- IEEE 802.3 10GBASE-T (up to 100m using Cat6a cabling or better)
- 25Gb and 50Gb Ethernet implemented per 25G/50G Ethernet Consortium specification and IEEE 802.3 standard

Power and Heat Dissipation

Switch Model	Minimum Heat Dissipation (BTU/hr) (Idle, no ports linked)	Minimum Power Consumption (Watts) (Idle, no ports linked)	Maximum Heat Dissipation (BTU/hr) (Fans high, all ports 100% traffic)	Maximum Power Consumption (Watts) (Fans high, all ports 100% traffic)
X590-24x-1q-2c -AC	278.42 BTU/hr	81.60 W	743.82 BTU/hr	218.00 W
X590-24x-1q-2c -DC	286.61 BTU/hr	84.00 W	786.12 BTU/hr	230.40 W
X590-24t-1q-2c -AC	310.97 BTU/hr	91.14 W	792.27 BTU/hr	232.20 W
X590-24t-1q-2c -DC	332.63 BTU/hr	97.49 W	833.62 BTU/hr	244.32 W
	1 PSU		2 PSU	

Power Supply Specifications

	770W AC PSU 10960/10961	1100W DC PSU 10962/10963
Dimensions	2.3 in W x 1.6 in H x 14.1 in D (5.9 cm x 4.1 cm x 35.9 cm)	2.3 in W x 1.6 in H x 14.1 in D (5.9 cm x 4.1 cm x 35.9 cm)
Weight	2.2 lb (1 Kg)	2.2 lb (1 Kg)
Voltage Input Range	100 - 240 VAC +/- 10%	-48 VDC -15% +20%
Line Frequency Range	50 - 60 Hz +/- 5%	N/A
PSU Input Socket	IEC 320 C14	Terminal Block
Power Cord Input Plug	IEC 320 C13	N/A
Operating Conditions	0° - 45°C Operation	

Acoustic Specifications

Switch Model	Bystander Sound Pressure	Declared Sound Power
X590-24x-1q-2c (Front-Back Airflow)	55.6 dB(A) up to 30°C 57.8 dB(A) up to 40°C 79.8 dB(A) @ 45°C (max)	6.9 bels up to 30°C 7.1 bels up to 40°C 9.5 bels @ 45°C (max)
X590-24x-1q-2c (Back-Front Airflow)	55.8 dB(A) up to 30°C 57.9 dB(A) up to 40°C 79.1 dB(A) @ 45°C (max)	6.9 bels up to 30°C 7.1 bels up to 40°C 9.5 bels @ 45°C (max)
X590-24t-1q-2c (Front-Back Airflow)	54.7 dB(A) up to 25°C 61.9 dB(A) up to 35°C 79.4 dB(A) @ 45°C (max)	6.8 bels up to 25°C 7.6 bels up to 35°C 9.4 bels @ 45°C (max)
X590-24t-1q-2c (Back-Front Airflow)	55.5 dB(A) up to 25°C 62.6 dB(A) up to 35°C 79.7 dB(A) @ 45°C (max)	6.8 bels up to 25°C 7.5 bels up to 35°C 9.2 bels @ 45°C (max)

Environmental Specifications

- EN/ETSI 300 019-2-1 v2.1.2 - Class 1.2 Storage
- EN/ETSI 300 019-2-2 v2.1.2 - Class 2.3 Transportation
- EN/ETSI 300 019-2-3 v2.1.2 - Class 3.1e Operational
- EN/ETSI 300 753 (1997-10) - Acoustic Noise ASTM D3580 Random Vibration Unpackaged 1.5 G

Environmental Compliance

- EU RoHS - 2011/65/EU
- EU WEEE - 2012/19/EU
- China RoHS - SJ/T 11363-2006
- Taiwan RoHS - CNS 15663(2013.7)

Packaging and Storage Specifications

- Temp: -40° C to 70° C (-40° F to 158° F)
- Humidity: 10% to 95% relative humidity, non-condensing
- Packaged Shock (half sine): 180 m/s² (18 G), 6 ms, 600 shocks
- Packaged Vibration: 5 to 62 Hz at velocity 5 mm/s, 62 to 500 Hz at 0.2 G
- Packaged Random Vibration: 5 to 20 Hz at 1.0 ASD w/-3 dB/oct. from 20 to 200 Hz
- Packaged Drop Height: 14 drops minimum on sides and corners at 42 inches (<15 kg box)

Regulatory and Safety

North American ITE

- UL 60950-1 2nd edition A2:2014, Listed Device (U.S.)
- CSA 22.2 No. 60950-1 2nd edition 2014(Canada)
- Complies with FCC 21CFR 1040.10 (U.S. Laser Safety)
- CDRH Letter of Approval (US FDA Approval)

European ITE EN

- 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013 2nd Ed.
- EN 60825-1:2007 / IEC 60825-1:2007 Class 1 (Lasers Safety)
- 2014 / 35/ EU Low Voltage Directive

International ITE

- CB Report & Certificate per IEC 60950-1 : 2005+A1:2009+A2:2013 + National Differences
- AS/NZS 60950-1 (Australia /New Zealand)

EMI/EMC Standards

North American EMC for ITE

- FCC CFR 47 part 15 Class A (USA)
- ICES-003 Class A (Canada)

European EMC Standards

- EN 55032:2015 Class A
- EN 55024:2010
- EN 61000-3-2,2014 (Harmonics)
- EN 61000-3-3 2013 (Flicker)
- EN 300 386 v1.6.1 (EMC Telecommunications)
- 2014/30/EU EMC Directive

International EMC Certifications

- CISPR 32:2015, Class A (International Emissions)
- AS/NZS CISPR32:2015
- CISPR 24:2010 Class A (International Immunity)
- IEC 61000-4-2:2008/EN 61000-4-2:2009 Electrostatic Discharge, 8kV Contact, 15 kV Air, Criteria A
- IEC 61000-4-3:2010/EN 61000-4-3:2006 +A1:2008 +A2:2010 Radiated Immunity 10V/m, Criteria A
- IEC 61000-4-4:2012. / EN 61000-4-4:2012 Transient Burst, 1 kV, Criteria A
- IEC 61000-4-5:2014 /EN 61000-4-5:2014 Surge, 2 kV L-L, 2 kV L-G, Level 3, Criteria A
- IEC 61000-4-6:2013/EN 61000-4-6:2014 Conducted Immunity, 0.15-80 MHz, 10V/m unmod. RMS, Criteria A
- IEC/EN 61000-4-11:2004 Power Dips & Interruptions, >30%, 25 periods, Criteria C

Country Specific

- VCCI Class A (Japan Emissions)
- ACMA RCM (Australia Emissions)
- CCC Mark
- KCC Mark, EMC Approval (Korea)

Telecom Standards

- CE 2.0 Compliant

IEEE 802.3 Media Access Standards

- IEEE 802.3ba / 802.3bm 40GBASE-X and 100GBASE-X
- IEEE 802.3ae 10GBASE-X
- IEEE 802.3 10GBASE-T (up to 100 m using Cat 6a cabling or better)
- 25Gb and 50Gb Ethernet implemented per 25G/50G Ethernet Consortium specification and IEEE 802.3 standard

Ordering Information

Part Number	Product Name	Product Description
ExtremeSwitching X590 Systems		
16790	X590-24x-1q-2c Base System	ExtremeSwitching X590 base unit with 24 1Gb/10Gb SFP+ ports, 1 10Gb/40Gb QSFP+ port, 2 10Gb/25Gb/40Gb/50Gb/100Gb capable QSFP28 ports, 2 unpopulated power supplies slots, 4 unpopulated fan module slots, ExtremeXOS Advanced Edge License
16791	X590-24t-1q-2c Base System	ExtremeSwitching X590 base unit with 24 100Mb/1Gb/10GBASE-T ports, 1 10Gb/40Gb QSFP+ port, 2 10Gb/25Gb/40Gb/50Gb/100Gb capable QSFP28 ports, 2 unpopulated power supplies slots, 4 unpopulated fan module slots, ExtremeXOS Advanced Edge License
17115	Fan Module FB	Fan module, Front to Back airflow
17116	Fan Module BF	Fan module, Back to Front airflow
10960	770W AC PSU F-B	770W AC power supply, Front-to-Back airflow
10961	770W AC PSU B-F	770W AC power supply, Back-to-Front airflow
10962	1100W DC PSU F-B	1100W DC power supply, Front-to-Back airflow
10963	1100W DC PSU B-F	1100W DC power supply, Back-to-Front airflow
16777	Four Piece Rack Mount Kit, Spare	Spare Four Piece Rack Mount compatible with X590
Fan module and power supplies must be ordered separately. Air flow direction of the fan module and power supplies must be the same. AC and DC power supplies cannot be mixed in a system. Rack mount rails are included.		
Firmware Licenses		
16795	X590 EXOS Core License	ExtremeSwitching X590 ExtremeXOS Core license upgrade from Advanced Edge
100Gb Optical Transceivers and Direct Attach Cables		
10401	100Gb QSFP28 SR4 MMF	100Gb, 100GBASE-SR4, 70m OM3 / 100m OM4 MMF, QSFP28, MPO (8 fiber)
10403	100Gb QSFP28 LR4 10km	100Gb, 100GBASE-LR4, 10km SMF, QSFP28, LC
10404	100Gb QSFP28 CWDM4	100Gb, CWDM4, 2km SMF, QSFP28, LC
10405	100Gb QSFP28 PSM4	100Gb, Parallel Single Mode PSM4, 2km SMF, QSFP28, MPO (8 fiber)
10434	100Gb, AOC QSFP28 5m	100Gb, QSFP28-QSFP28 Active optical cable, 5m
10435	100Gb, AOC QSFP28 7m	100Gb, QSFP28-QSFP28 Active optical cable, 7m
10436	100Gb, AOC QSFP28 10m	100Gb, QSFP28-QSFP28 Active optical cable, 10m
10437	100Gb, AOC QSFP28 20m	100Gb, QSFP28-QSFP28 Active optical cable, 20m
10441	100Gb AOC QSFP28 x 4 SFP28 5m	100Gb, QSFP28- 4xSFP28 (4x25Gb) Active optical breakout cable, 5m
10442	100Gb AOC QSFP28 x 4 SFP28 7m	100Gb, QSFP28- 4xSFP28 (4x25Gb) Active optical breakout cable, 7m
10443	100Gb AOC QSFP28 x 4 SFP28 10m	100Gb, QSFP28- 4xSFP28 (4x25Gb) Active optical breakout cable, 10m
10444	100Gb AOC QSFP28 x 4 SFP28 20m	100Gb, QSFP28- 4xSFP28 (4x25Gb) Active optical breakout cable, 20m
10410	100Gb, DAC QSFP28-QSFP28 0.5m	100Gb, QSFP28-QSFP28 Direct attach passive copper cable, 0.5m
10411	100Gb, DAC QSFP28-QSFP28 1m	100Gb, QSFP28-QSFP28 Direct attach passive copper cable, 1m
10413	100Gb, DAC QSFP28-QSFP28 3m	100Gb, QSFP28-QSFP28 Direct attach passive copper cable, 3m
10414	100Gb, DAC QSFP28-QSFP28 5m	100Gb, QSFP28-QSFP28 Direct attach passive copper cable, 5m
10421	100Gb, DAC QSFP28-4xSFP28 1m	100Gb, QSFP28-4 x SFP28 (4x25Gb) Direct attach passive copper breakout, 1m
10423	100Gb, DAC QSFP28-4xSFP28 3m	100Gb, QSFP28-4 x SFP28 (4x25Gb) Direct attach passive copper breakout, 3m
10424*	100Gb, DAC QSFP28-4xSFP28 5m	100Gb, QSFP28-4 x SFP28 (4x25Gb) Direct attach passive copper breakout, 5m
10426	100Gb, DAC QSFP28-2xQSFP28 1m	100Gb, QSFP28-2 x QSFP28 (2x50Gb) Direct attach passive copper breakout, 1m
10428	100Gb, DAC QSFP28-2xQSFP28 3m	100Gb, QSFP28-2 x QSFP28 (2x50Gb) Direct attach passive copper breakout, 3m
10446	100Gb AOC QSFP28-2xQSFP28 5m	100Gb, QSFP28- 2 x QSFP28 (2x50Gb) Active Optical Breakout Cable, 5m
10447	100Gb AOC QSFP28-2xQSFP28 7m	100Gb, QSFP28- 2 x QSFP28 (2x50Gb) Active Optical Breakout Cable, 7m
10448	100Gb AOC QSFP28-2xQSFP28 10m	100Gb, QSFP28- 2 x QSFP28 (2x50Gb) Active Optical Breakout Cable, 10m
10449	100Gb AOC QSFP28-2xQSFP28 20m	100Gb, QSFP28- 2 x QSFP28 (2x50Gb) Active Optical Breakout Cable, 20m

Ordering Information (cont.)

Part Number	Product Name	Product Description
40Gb Optical Transceivers and Direct Attach Cables		
10319	QSFP+ SR4 module	40Gb QSFP+ SR4 optical module, MPO connector (8 fiber), 100m MMF OM3, 140m MMF OM4
40GB-ESR4-QSFP	QSFP+ ESR4	40GB QSFP+ Extended Reach SR4, MMF, 300m OM3, 400m OM4 MMF
10320	QSFP+ LR4	40Gb QSFP+ LR4 optical module, LC, 10km SMF
10326	QSFP+ PSM Optical Module	40Gb QSFP+ Parallel Single Mode (PSM) LR4, MPO connector (8 fiber), SMF, 10km
10329	40Gb Bidi MMF QSFP+	40Gb Bidirectional MMF, 100m OM3, QSFP+, duplex LC
10334	40Gb LM4 QSFP+	40Gb QSFP+ LM4, 140m OM3 MMF, 1km SMF, QSFP+, LC
10335	40Gb ER4 QSFP+	40Gb QSFP+ ER4, 40km SMF, QSFP+, LC
10311	QSFP+ passive copper cable, 0.5M	40 Gigabit Ethernet QSFP+ passive copper cable assembly, 0.5m length
10312	QSFP+ passive copper cable, 1.0M	40 Gigabit Ethernet QSFP+ passive copper cable assembly, 1m length
10313	QSFP+ passive copper cable, 3.0M	40 Gigabit Ethernet QSFP+ passive copper cable assembly, 3m length
10323	QSFP+ passive copper cable, 5.0M	40 Gigabit Ethernet QSFP+ passive copper cable assembly, 5m length
10336	3m QSFP+ Active Optical Cable	40 Gigabit QSFP+ active optical cable, 3m
10337	5m QSFP+ Active Optical Cable	40 Gigabit QSFP+ active optical cable, 5m
10315	10m QSFP+ Active Optical Cable	40 Gigabit Ethernet QSFP+ active optical cable assembly, 10m length
10316	20m QSFP+ Active Optical Cable	40 Gigabit Ethernet QSFP+ active optical cable assembly, 20m length
10318	100m QSFP+ Active Optical Cable	40 Gigabit Ethernet QSFP+ active optical cable assembly, 100m length
10321	QSFP+ - 4xSFP+ fan-out cbl, 3m	QSFP+ to 4 x SFP+ fan-out copper cable, 3m
10322	QSFP+ - 4xSFP+ fan-out cbl, 5m	QSFP+ to 4 x SFP+ fan-out copper cable, 5m
QSFP-SFPP-ADPT	QSFP+ to SFP+ Adapter	QSFP+ to SFP+ adapter, supports a single SFP+ 10Gb Ethernet transceiver in a QSFP+ port (optical transceivers only, 10303 LRM and 10338 10GBASE-T not supported)
10Gb Transceivers and Direct Attach Cables		
10301	SR SFP+ module	10GBASE-SR SFP+, 850nm, LC, 300m OM3 MMF, 400m OM4 MMF
10302	LR SFP+ module	10GBASE-LR SFP+, 1310nm, LC, 10km SMF
10309	10GBASE-ER SFP+	10GBASE-ER SFP+, 1550nm, LC connector, transmission length of up to 40km on SMF
10310	10GBASE-ZR SFP+	10Gb, 10GBASE-ZR, SMF, 1550nm, up to 80Km, LC SFP+
10325	10Gb SFP+ DWDM Tunable	10Gb DWDM Tunable, 80km SMF, LC SFP+
10GB-BX10-U	10 GB, SINGLE FIBER SM, -U 10 KM	10Gb, Single Fiber SM, Bidirectional, 1270nm Tx / 1330nm RX, 10Km, Simplex LC SFP+ (must be paired with 10GB-BX10-D)
10GB-BX10-D	10 GB, SINGLE FIBER SM, -D 10 KM	10Gb, Single Fiber SM, Bidirectional, 1330nm Tx / 1270nm RX, 10Km, Simplex LC SFP+ (must be paired with 10GB-BX10-U)
10GB-BX40-U	10 GB, SINGLE FIBER SM, -U 40 KM	10Gb, Single Fiber SM, Bidirectional, 1330nm Tx / 1330nm RX, 40Km, Simplex LC SFP+ (must be paired with 10GB-BX40-D)
10GB-BX40-D	10 GB, SINGLE FIBER SM, -D 40 KM	10Gb, Single Fiber SM, Bidirectional, 1270nm Tx / 1270nm RX, 40Km, Simplex LC SFP+ (must be paired with 10GB-BX40-U)
10GB-F10-SFPP	10 GB, ACTIVE OPTICAL DAC, 10 M	10Gb, Active optical direct attach cable with 2 integrated SFP+ transceivers, 10m
10GB-F20-SFPP	10 GB, ACTIVE OPTICAL DAC, 20 M	10Gb, Active optical direct attach cable with 2 integrated SFP+ transceivers, 20m
10304	10GBASE-CR SFP+ 1m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 1m
10305	10GBASE-CR SFP+ 3m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 3m
10306	10GBASE-CR SFP+ 5m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 5m
10307	10GBASE-CR SFP+ 10m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 10m
10338**	10Gb SFP+ 10GBASE-T	10Gb SFP+, 10GBASE-T RJ45, 30m with Cat6a

Ordering Information (cont.)

Part Number	Product Name	Product Description
1Gb Transceivers		
10051H	1000BASE-SX SFP, Hi	1000BASE-SX SFP, MMF 220 & 550 meters, LC connector, Industrial Temp
10052H	1000BASE-LX SFP, Hi	1000BASE-LX SFP, MMF 220 & 550 meters, SMF 10km, LC connector, Industrial Temp
10053H	1000BASE-ZX SFP, Hi	1000BASE-ZX SFP, SMF 70km, LC connector, Industrial Temp
10056H	1000BASE-BX-D BiDi SFP, Hi	1000BASE-BX-D SFP SMF single fiber, 1490-nm TX/1310-nm RX wavelength, 10Km, simplex LC Industrial Temp
10057H	1000BASE-BX-U BiDi SFP, Hi	1000BASE-BX-U SFP SMF single fiber, 1310-nm TX/1490-nm RX wavelength, 10Km, simplex LC Industrial Temp
MGBIC-BX40-U	1000BASE-BX-U BiDi SFP 40Km	1000BASE-BX-U SFP, single fiber, 1310-nm TX/1490-nm RX wavelength, 40Km Industrial Temp
MGBIC-BX40-D	1000BASE-BX-D BiDi SFP 40Km	1000BASE-BX-D SFP, single fiber, 1490-nm TX/1310-nm RX wavelength, 40Km Industrial Temp
MGBIC-BX120-U	1000BASE-BX-U BiDi SFP 120Km	1000BASE-BX-U SFP, single fiber, 1490-nm TX/1590-nm RX wavelength, 120Km Industrial Temp
MGBIC-BX120-D	1000BASE-BX-D BiDi SFP 120Km	1000BASE-BX-U SFP, single fiber, 1590-nm TX/1490-nm RX wavelength, 120Km Industrial Temp
I-MGBIC-LC03	1000BASE-LX MMF SFP	1000BASE-LX SFP MMF, 1310nm, 2km with 62.5 micron OM1 MMF, 1km on 50 micron OM2 MMF, LC
MGBIC-02***	1000BASE-T, RJ-45 SFP	1000BASE-T SFP, RJ45, 100m Cat5e

* 10424 100Gb DAC passive copper DAC breakout cable can also be used for 40Gb to 4 x 10Gb speed breakout.

** 10338 supported in X590-24t-1q-2c model with configuration of every other SFP+ port in system, up to a maximum of half the 10Gb SFP+ ports configured with 10GBASE-T transceivers. An adjacent SFP+ port should remain unused for every 10GBASE-T SFP+ installed.

*** MGBIC-02 only supports 1Gb operation on X590.

See the ExtremeXOS Hardware/Software Compatibility and Recommendation Matrices document for a full list of supported devices and ExtremeXOS

Warranty

One year hardware warranty. For warranty details, visit: <http://www.extremenetworks.com/go/warranty>

Power Cords

In support of the Extreme Networks Green Initiatives, power cords can be ordered separately but need to be specified at time of ordering. Please refer to www.extremenetworks.com/product/powercords for details on power cord availability for this product.



<http://www.extremenetworks.com/contact>

©2018 Extreme Networks, Inc. All rights reserved. Extreme Networks and the Extreme Networks logo are trademarks or registered trademarks of Extreme Networks, Inc. in the United States and/or other countries. All other names are the property of their respective owners. For additional information on Extreme Networks Trademarks please see <http://www.extremenetworks.com/company/legal/trademarks>. Specifications and product availability are subject to change without notice. 12044-1118-16