
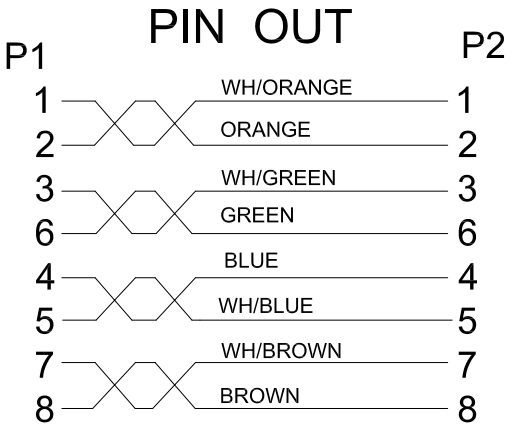


**RoHS
Compliant**

Customer number	SOP
004	XXX

VERSION	DESCRIPTION	DATE
1.0	New Release	2015/4/25

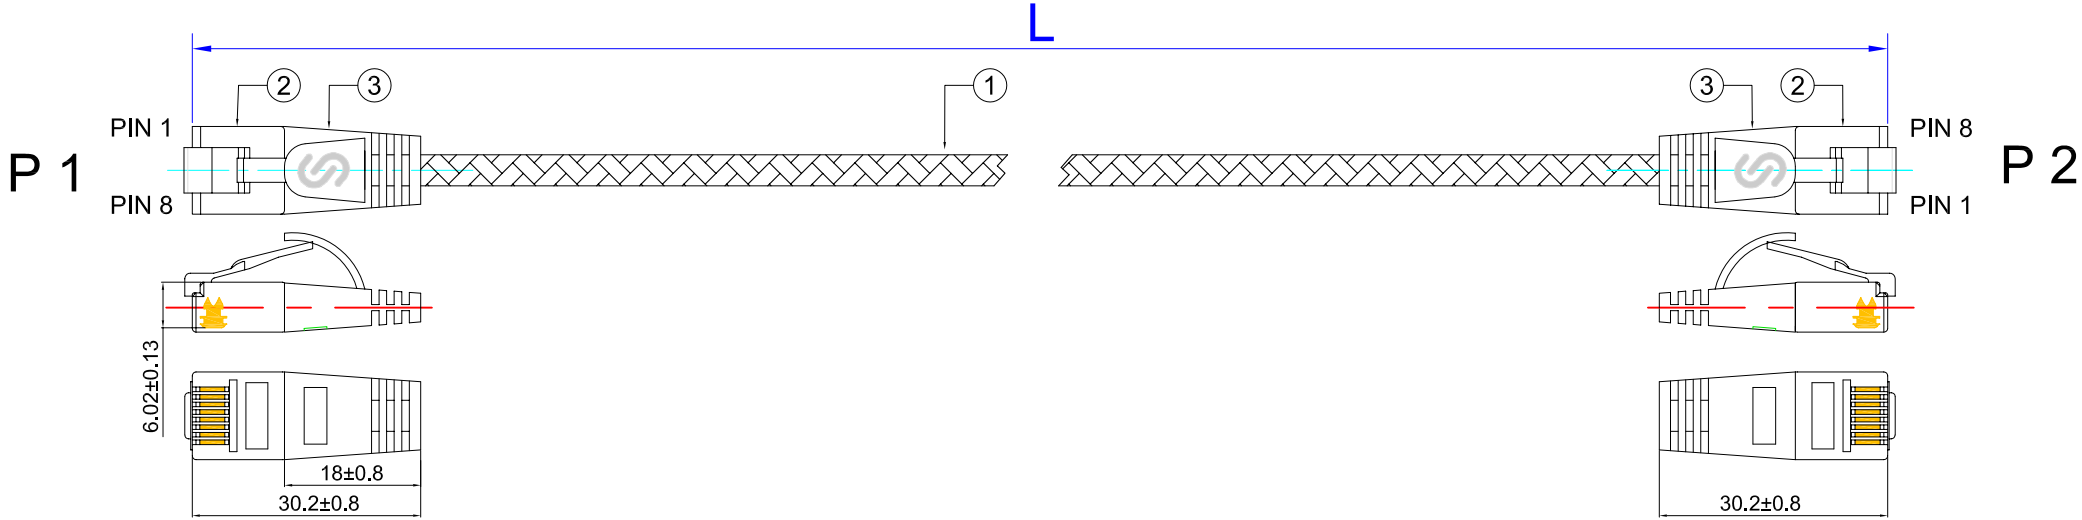

- Test:
- 100% Open Short and miswire test.
 - DC300V, Contact resistance (3+2L)Ω MAX.
 - Insulation resistance 1MΩ MIN.
 - Pass TIA Cat.6 Channel Test (L≤15m)
 - Temperature range: -20°C bis +60°C



5			TITLE	PKW-TOUGH-STP-K6 x.x		
4		UNIT	mm	P/N		DRAWN BY
3	PVC Black(Black/60P), Model:SR072	unless otherwise stated Tolerances		Customer P/N		CHECK BY
2	(P1&P2) RJ45,8P8C,Short plug,Long latch,Pin gold plated 50u"	mm	angular	SIZE	SCALE	PAGE 1/3 APPROVAL BY
1	CAT.6 STP 4P*36AWG-BC STRANDED,PVC+Nylon braid, Jacket	XXX.XX ±0.3	±2°	A4	Free	
No.	Description	X.XX ±0.2				
		X.XX ±0.1				