




pure patch

CATALOG
THIN, FLAT & FLEXIBLE
COPPER PATCH CORDS

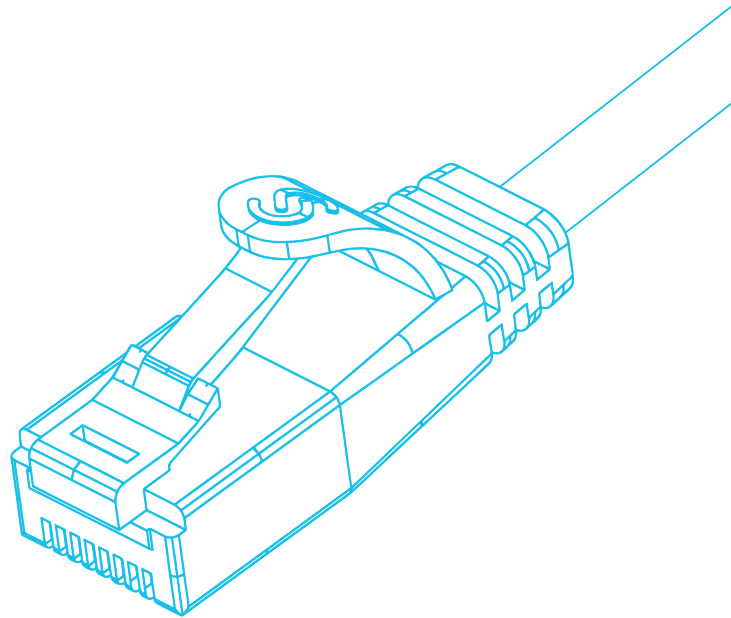

**FLAT**

Flat Copper Patch Cords

07**LIGHT**

Round Copper Patch Cords

17**TOUGH**

Nylon-Reinforced Copper Patch Cords

33

YOUR SERVER RACK DOESN'T HAVE TO LOOK LIKE THIS!



WITH OUR SLIM PATCH CORD, YOU HAVE EVERYTHING UNDER CONTROL.

SLIM patch cord are **more flexible** than standard cables. Rigid cords are a thing of the past.

They are **thin** (Ø 2.8-3.6 mm), **flexible**, and **powerful**.


SLIM patch cords comply with international cabling standards, ensuring high data transfer rates.

Power-over-Ethernet is also supported!

- World's thinnest patch cords
- Much more rack space
- Very short plug
- Extremely flexible
- Suitable for Gigabit Ethernet and 10 Gigabit Ethernet
- Suitable for Power-over-Ethernet




FLAT

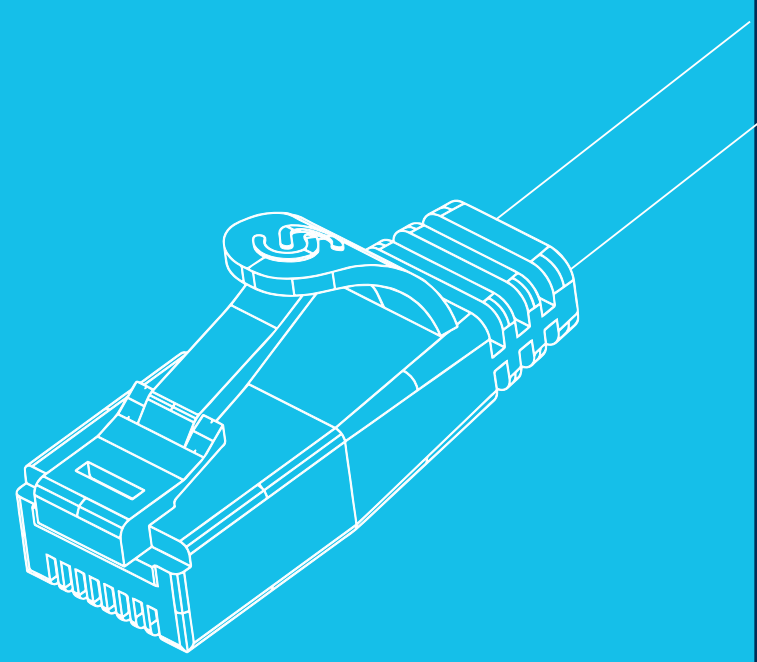

FLAT COPPER PATCH CORD


CAT6A SLIM FLAT PATCH CORD shielded, flat	10
CAT6 SLIM FLAT PATCH CORD unshielded, flat	12
CAT6 SLIM FLAT PATCH CORD shielded, flat	14

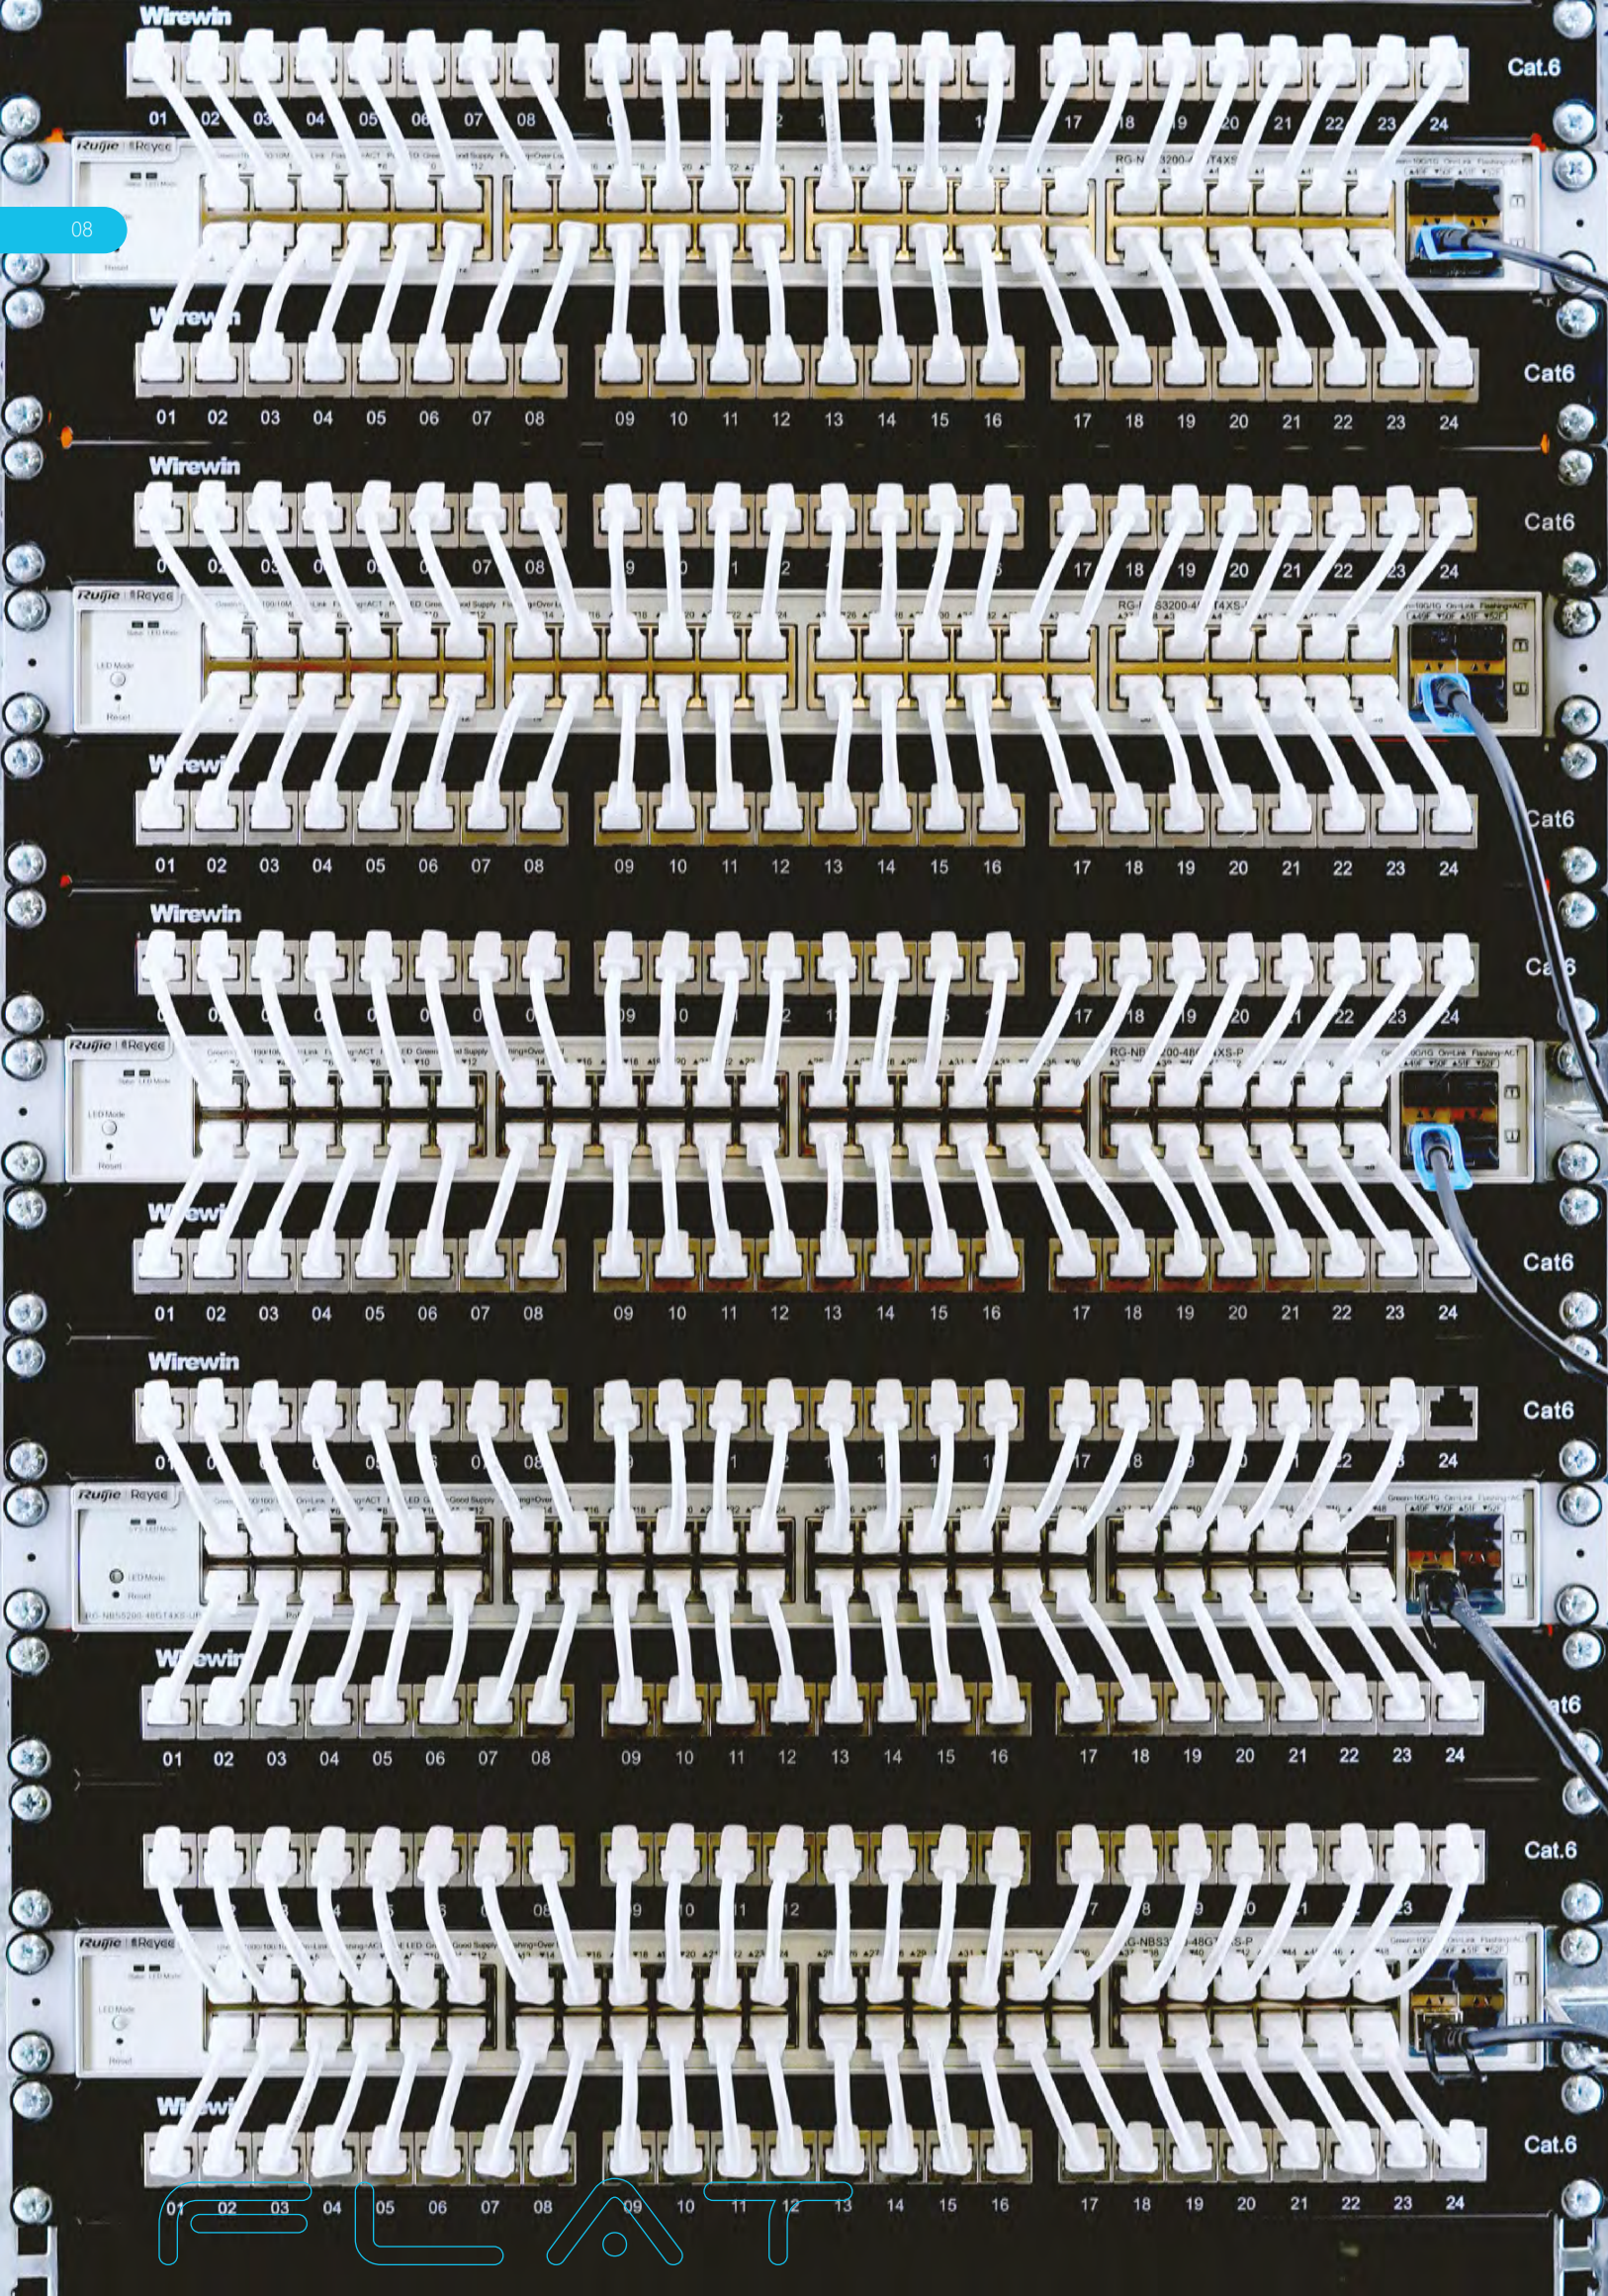

08

**FLEXIBILITY
PLUS
SHIELDING:
JUST SLIM**

CAT6_A SLIM FLAT PATCH CORD SHIELED, FLAT

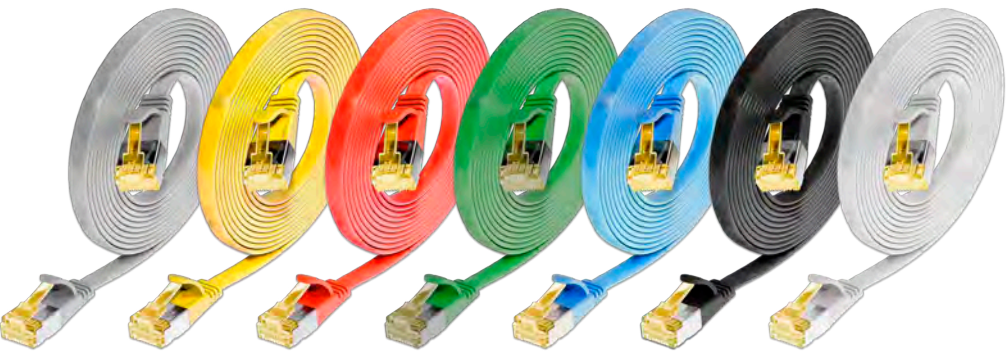

Unleash the Power of Speed: Introducing our High Performance Flat Patch Cord!
In the world of network, speed is everything. We understand that 10 Gigabit applications require more than their 1 Gigabit counterparts. Our state-of-the-art FLAT Patch Cord is designed to meet the extraordinary technical demands of 10 Gigabit deployments, ensuring unparalleled performance and reliability.

Equipped with superior shielding for each pair, our cables go above and beyond to ensure signal integrity. Our cables comply with the stringent Channel Category 6A standard set by ISO/IEC and EN50173, meeting the highest industry standards to ensure exceptional performance for your network.


Power-over-Ethernet transmission? We have the solution for you. Our cables support PoE, giving you the flexibility to power your devices with ease.


Experience convenience like never before with our specially designed plug. With user-friendly push-button operation and a sleek, compact design, connecting your devices has never been easier or more efficient.
Upgrade your network today with our high-performance flat patch cord. Embrace a future of speed, reliability and innovation.
Your network deserves nothing less.



DESCRIPTION

Category	CAT6A
Connector Type	RJ45
Boot	SLIM design, snap-on nose guard, length specification
Assignment	1:1 TIA/EIA 568B
Shield	U/FTP shielded
Sheath	PVC
Wires	AWG32 100% Copper
Dimensions	6.0 mm x 1.9 mm
Temperature range	-20°C to +60°C
Standard colours	Gray, Yellow, Red, Green, Blue , Black, White
Packaging unit	Single Unit
Standard lengths	0.1 / 0.25 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.0 m

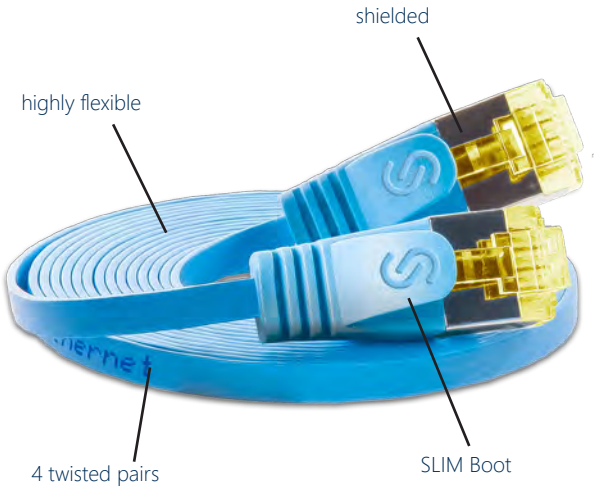

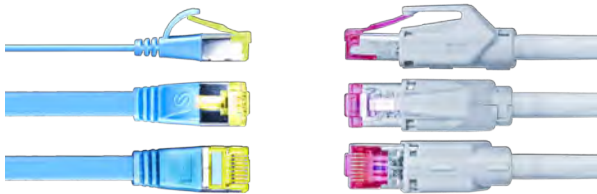

The comparison shows the difference.

The dream of every IT technician, network administrator, mechatronics engineer or building systems engineer:

- No cable clutter, no cable jams.
- Flat and highly flexible network cables make this dream a reality.



ORDER INFORMATION

COLOUR

Gray
Yellow
Red
Green
Blue
Black
White

PART NUMBER


PKW-STP-SLIM-K6A x.x
PKW-STP-SLIM-K6A x.x GE
PKW-STP-SLIM-K6A x.x RT
PKW-STP-SLIM-K6A x.x GN
PKW-STP-SLIM-K6A x.x BL
PKW-STP-SLIM-K6A x.x SW
PKW-STP-SLIM-K6A x.x WS

x.x = Length specification

Standard lengths:

0.1 / 0.25 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.0 m

Custom lengths possible

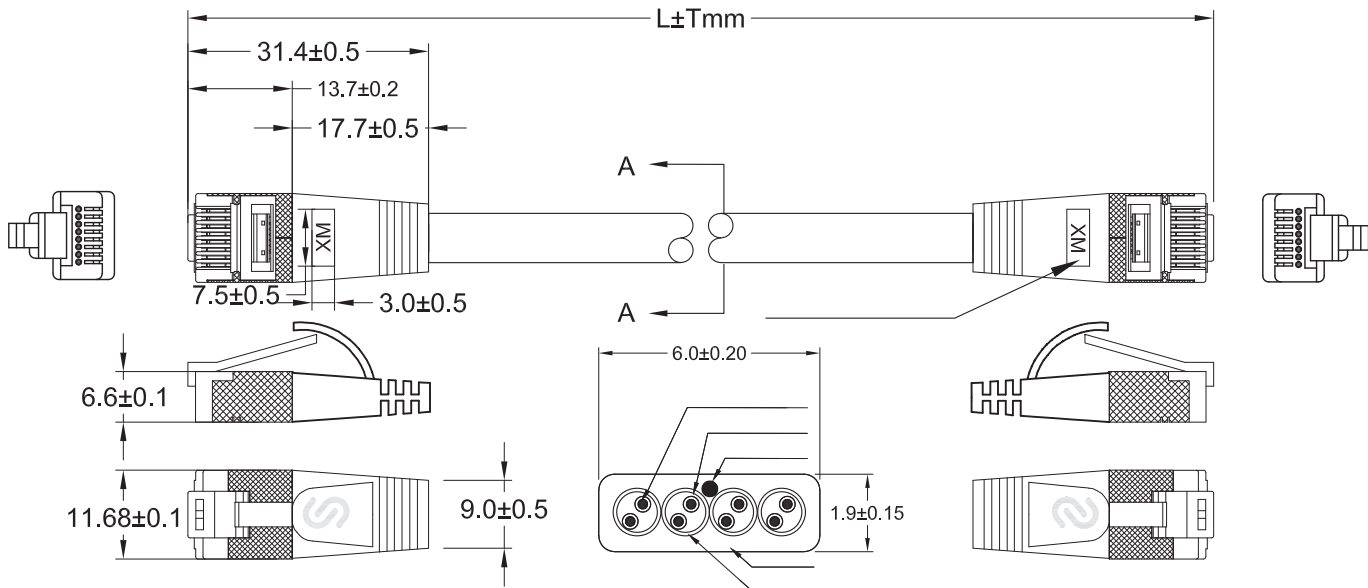

CAT6 SLIM FLAT PATCH CORD UNSHIELDED, FLAT



This type of cable was our first product in 2004. Millions of units have been sold since then. It still remains one of our most popular products.

The cable is designed for 1 Gigabit Ethernet. It consists of 4 twisted pairs with the thinnest possible copper diameter, resulting in an extremely slim and highly flexible design.

Despite the thin design, Power over Ethernet according to IEEE 802.3af is also possible.


The cables comply with channel standard category 6 according to ISO/IEC and EN50173.

In addition to traditional IT applications, this cable is also ideal for special solutions where space is limited. There is no more flexible and space-saving Patch Cord than this variant.



DESCRIPTION

Category	CAT6
Connector Type	RJ45
Boot	SLIM design, snap-on nose guard, length specification
Assignment	1:1 TIA/EIA 568B
Shield	U/UTP unshielded
Sheath	PVC
Wires	AWG36 100% Copper
Dimensions	4,1 mm x 1.1 mm
Temperature range	-20°C to +60°C
Standard colours	Gray, Yellow, Orange, Red, Green, Blue, Purple, Black, White
Packaging unit	Single Unit
Standard lengths	0.1 / 0.15 / 0.25 / 0.5 / 0.75 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.5 / 10.0 / 15.0 / 20.0 / 25.0 m

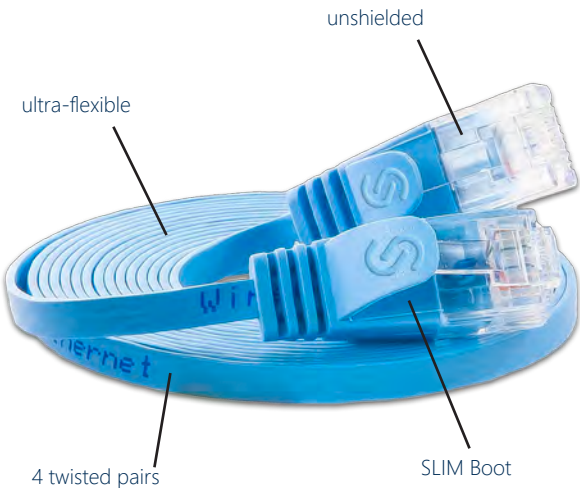



The comparison shows the difference.

The dream of every IT technician, network administrator, mechatronics engineer or building systems engineer:

- No cable clutter, no cable jams.
- Flat and highly flexible network cables make this dream a reality.



ORDER INFORMATION


COLOUR	PART NUMBER
Gray	PKW-SLIM-KAT6 x.x
Yellow	PKW-SLIM-KAT6 x.x GE
Orange	PKW-SLIM-KAT6 x.x OR
Red	PKW-SLIM-KAT6 x.x RT
Green	PKW-SLIM-KAT6 x.x GN
Blue	PKW-SLIM-KAT6 x.x BL
Purple	PKW-SLIM-KAT6 x.x VI
Black	PKW-SLIM-KAT6 x.x SW
White	PKW-SLIM-KAT6 x.x WS

x.x = Length specification

Standard lengths:

0.1 / 0.15 / 0.25 / 0.5 / 0.75 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 10.0 / 15.0 / 20.0 / 25.0 m

Custom lengths possible

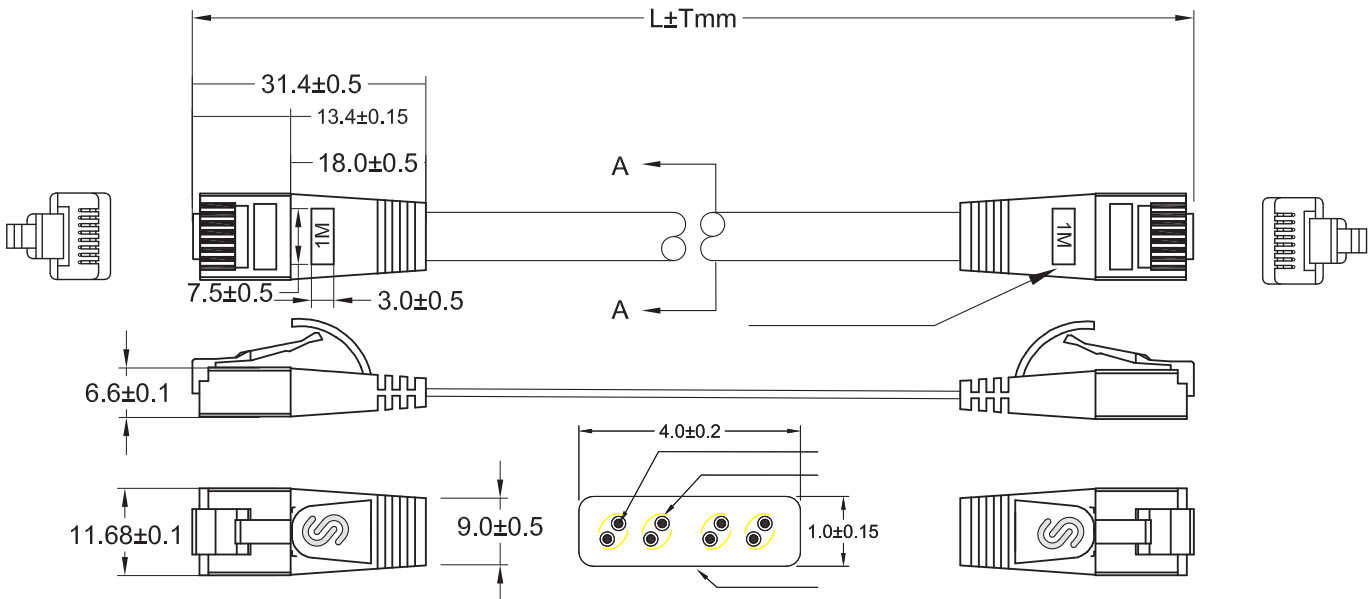

CAT6 SLIM FLAT PATCH CORD SHIELED, FLAT



The flat, shielded, SLIM Patch Cords are pair-shielded, category 6 patch cords suitable for Gigabit Ethernet data transmission and PoE.

Despite the pair-wise shielding, mechanical flexibility is not compromised.


These cords are also twisted in pairs and shielded to increase the security of data transmission.

The cords comply with the Channel Category 6 standard according to ISO/IEC and EN50173.



DESCRIPTION

Category	CAT6
Connector Type	RJ45
Boot	SLIM design, snap-on nose guard, length specification
Assignment	1:1 TIA/EIA 568B
Shield	U/FTP shielded
Sheath	PVC
Wires	AWG36 100% Copper
Dimensions	6.1 mm x 1.5 mm
Temperature range	-20°C to +60°C
Standard colours	Gray, Yellow, Orange, Red, Green, Blue, Purple, Black, White
Packaging unit	Single Unit
Standard lengths	0.1 / 0.15 / 0.25 / 0.5 / 0.75 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.5 / 10.0 / 15.0 / 20.0 / 25.0 m

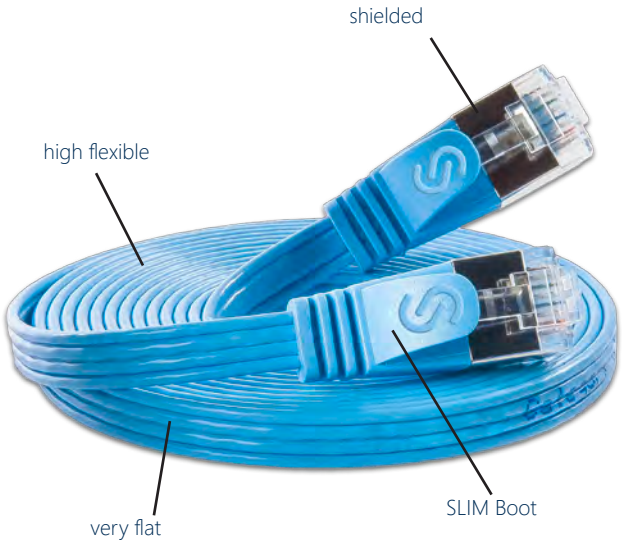



The comparison shows the difference.

The dream of every IT technician, network administrator, mechatronics engineer or building systems engineer:

- No cable clutter, no cable jams.
- Flat and highly flexible network cables make this dream a reality.

ORDER INFORMATION


COLOUR	PART NUMBER
Gray	PKW-STP-SLIM-KAT6 x.x
Yellow	PKW-STP-SLIM-KAT6 x.x GE
Orange	PKW-STP-SLIM-KAT6 x.x OR
Red	PKW-STP-SLIM-KAT6 x.x RT
Green	PKW-STP-SLIM-KAT6 x.x GN
Blue	PKW-STP-SLIM-KAT6 x.x BL
Purple	PKW-STP-SLIM-KAT6 x.x VI
Black	PKW-STP-SLIM-KAT6 x.x SW
White	PKW-STP-SLIM-KAT6 x.x WS

x.x = Length specification


Standard lengths:

0.1 / 0.15 / 0.25 / 0.5 / 0.75 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 10.0 / 15.0 / 20.0 / 25.0 m

Custom lengths possible

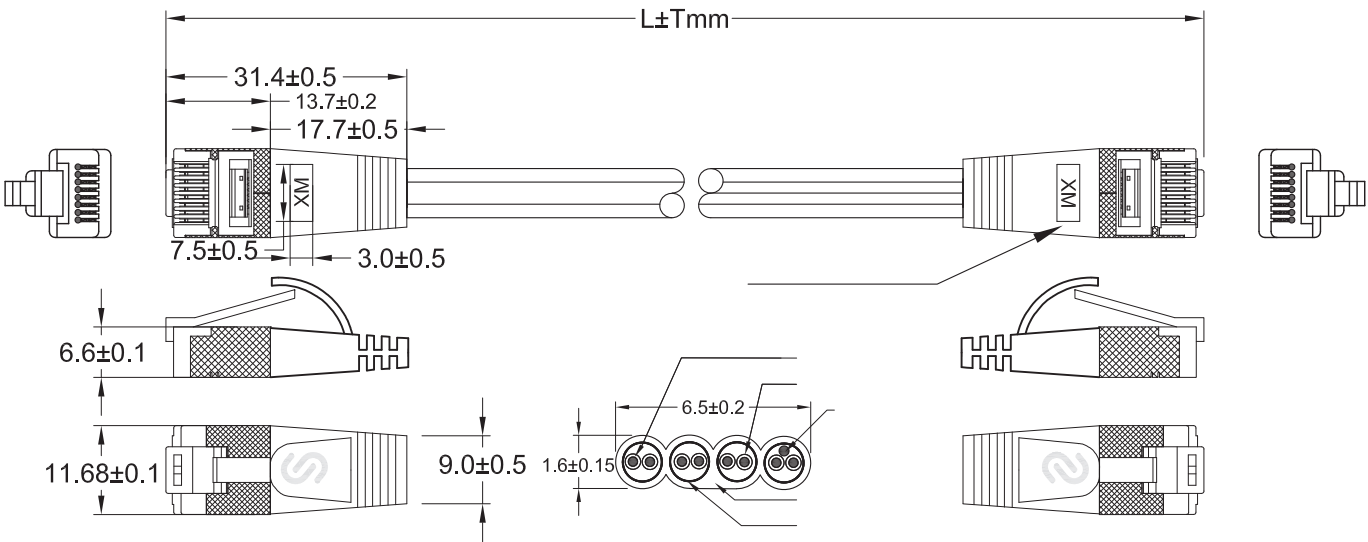

LIGHT

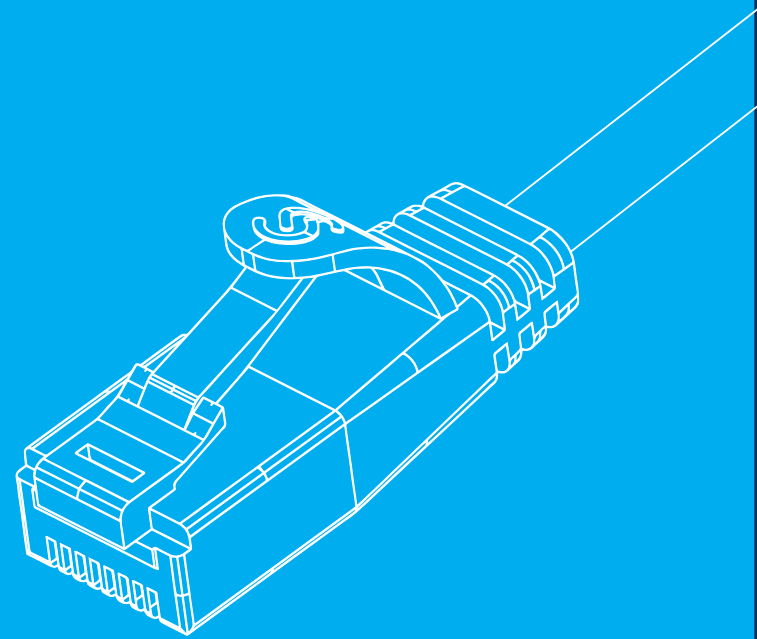

ROUND COPPER PATCH CORDS

CAT6A SLIM LIGHT PATCH CORD shielded, round (GHMT certified)_____18

CAT6A SLIM LIGHT PATCH CORD shielded, round, translucent connector_____20

CAT6A SLIM LIGHT PATCH CORD unshielded, round_____22

CAT6A SLIM LIGHT PATCH CORD unshielded, round, translucent connector_____24

CAT6 SLIM LIGHT PATCH CORD unshielded, round (GHMT certified)_____26

CAT6 SLIM LIGHT PATCH CORD shielded, round (GHMT certified)_____28

Multipack CAT6A SLIM LIGHT PATCH CORD shielded, round (GHMT certified)_____30



CAT6_A SLIM LIGHT PATCH CORD SHIELED, ROUND



The Ultimate Patch Cord Experience.

Our flagship Patch Cord is more than just a cable; it's a testament to innovation and performance. Let us surprise you with what it has to offer:


- Unrivalled flexibility
- Amazingly slim design
- Breakthrough performance: 2.5 / 5 / 10 Gbps
- Rugged shielding for uncompromised security
- Flame retardant LSZH jacket for enhanced safety
- Indestructible connector

Designed to exceed expectations, our cables meet the Channel Category 6A standard of ISO/IEC and EN50173, the gold standard for network excellence. Welcome to a new era of networking with SLIM® brand CAT6A LIGHT Patch Cords. These sleek marvels redefine patching for 10 Gigabit applications with their amazingly flexible and thin design.



DESCRIPTION

Category	CAT6A
Connector Type	RJ45
Boot	SLIM design, snap-on nose guard, length specification
Assignment	1:1 TIA/EIA 568B
Shield	U/FTP shielded
Sheath	LSZH
Wires	AWG32 100% Copper
Diameter	3.8 mm
Temperature range	-20°C to +60°C
Standard colours	Gray, Yellow, Red, Green, Blue, Black, White, Orange, Violet
Packaging unit	Single Unit od Multipack
Standard lengths	0.1 / 0.25 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.0 m
Certificate	GHMZ certified, Tested with Fluke Cable-Certifier in Channel Test

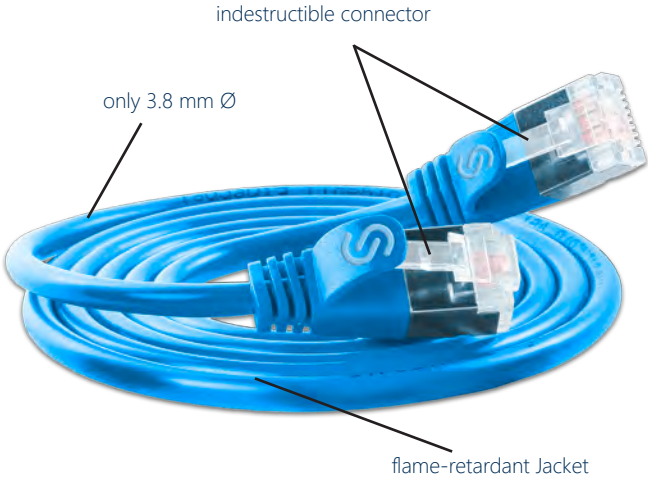

L I G H T

Also available in Multi-packs!

S SLIM
LIGHT



The comparison shows the difference.

The dream of every IT technician, network administrator, mechatronics engineer or building systems engineer:

- No cable clutter, no cable jams.
- Highly flexible network cables make this dream a reality.



ORDER INFORMATION

COLOUR

Gray
Yellow
Red
Green
Blue
Black
Violet
Orange
White

PART NUMBER


PKW-LIGHT-STP-K6A **x.x**
PKW-LIGHT-STP-K6A **x.x** GE
PKW-LIGHT-STP-K6A **x.x** RT
PKW-LIGHT-STP-K6A **x.x** GN
PKW-LIGHT-STP-K6A **x.x** BL
PKW-LIGHT-STP-K6A **x.x** SW
PKW-LIGHT-STP-K6A **x.x** VT
PKW-LIGHT-STP-K6A **x.x** OR
PKW-LIGHT-STP-K6A **x.x** WS

x.x = Length specification


Standard lengths:

0.1 / 0.25 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.0 m

Custom lengths possible

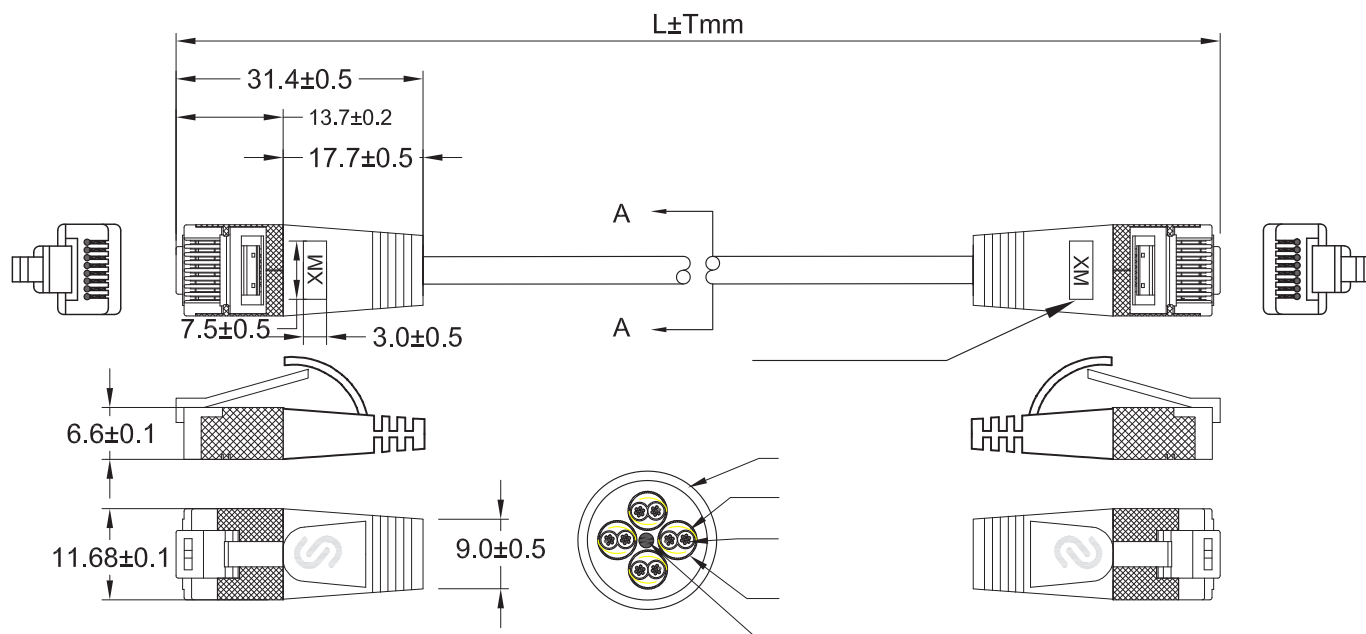

CAT6_A SLIM LIGHT PATCH CORD SHIELDED, ROUND, TRANSLUCENT CONNECTORS

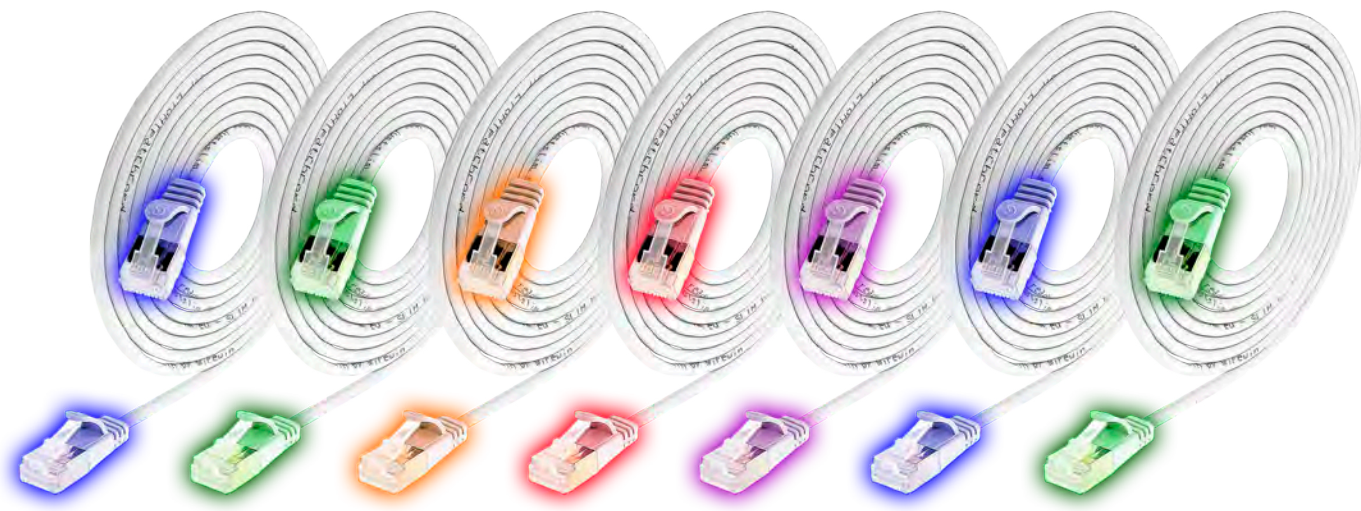

The ultimate patch cord experience with lighting effects thanks to the Etherlighting™ system.

Our flagship Patch Cord is more than just a cable; it's a testament to innovation and performance. Let us surprise you with its features::

- Unrivalled flexibility
- Amazingly slim design
- Breakthrough performance: 2.5 / 5 / 10 Gbps
- Rugged shielding for uncompromised security
- Flame retardant LSZH jacket for enhanced safety
- Indestructible connector


Designed to exceed expectations, our cables meet the Channel Category 6A standard of ISO/IEC and EN50173, the gold standard for network excellence. Welcome to a new era of networking with SLIM® brand CAT6A LIGHT Patch Cords. These sleek marvels redefine patching for 10 Gigabit applications with their amazingly flexible and thin design.

In addition, the connector is made of translucent material, which optimally supports the Etherlighting™ system by Ubiquiti.



DESCRIPTION

Category	CAT6A
Connector Type	RJ45
Boot	SLIM design, snap-on nose guard, length specification
Assignment	1:1 TIA/EIA 568B
Shield	U/FTP shielded
Sheath	LSZH
Wires	AWG28 100% Copper
Diameter	4.8 mm
Temperature range	-20°C to +60°C
Standard colours	Gray, Yellow, Red, Green, Blue, Black, White
Packaging unit	Single Unit
Standard lengths	0.1 / 0.15 / 0.20 / 0.25 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.5m

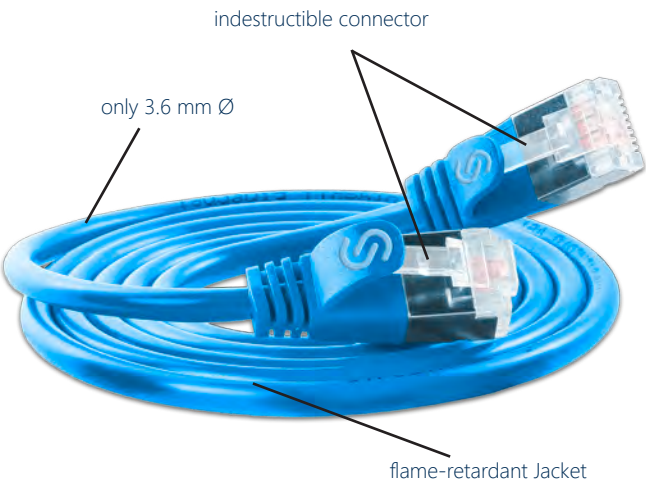

L I G H T



The comparison shows the difference.

The dream of every IT technician, network administrator, mechatronics engineer or building systems engineer:



- No cable clutter, no cable jams.
- Highly flexible network cables make this dream a reality.

ORDER INFORMATION


COLOUR	PART NUMBER
White	SLIM-L-UF-K6A-TL x.x WT

x.x = Length specification

Standard lengths:
0.1 / 0.15 / 0.25 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.5 m
Custom lengths possible

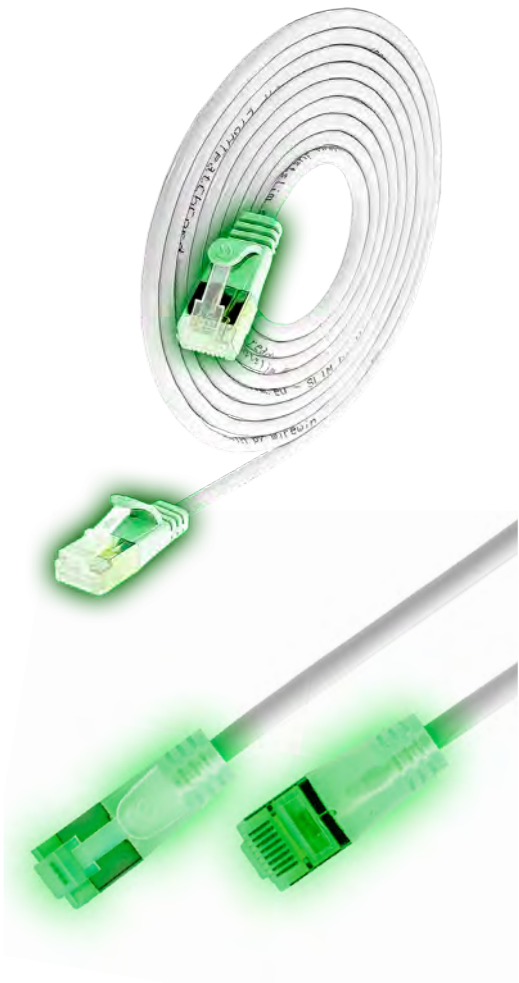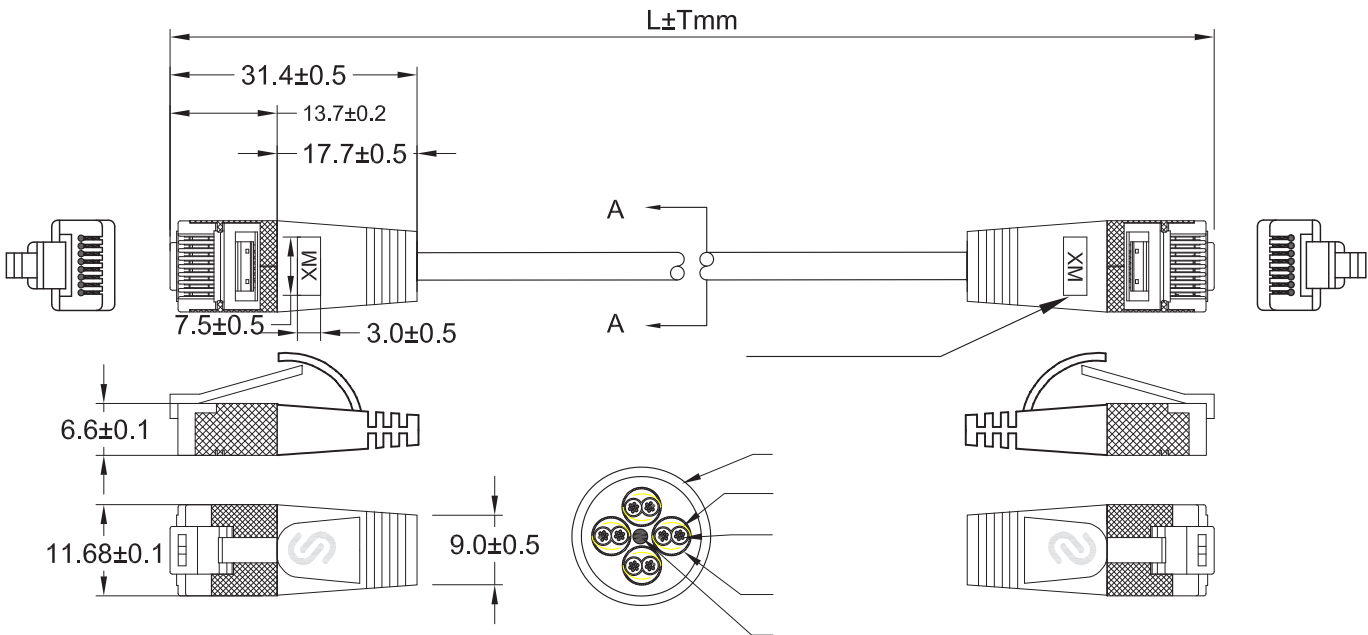

CAT6_A SLIM LIGHT PATCH CORD UNSHIELDED, ROUND

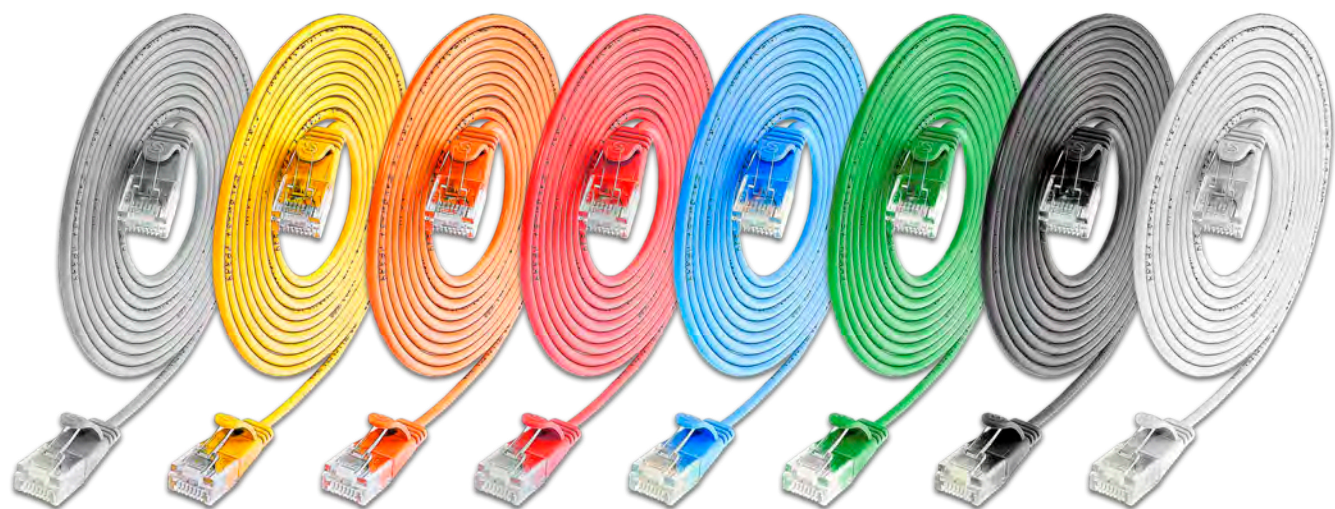

After years of success with our FLAT SLIM Patch Cords, we can now offer the same performance in a round design.

The unshielded version with a diameter of only 2.8 mm resembles a Fiber Optic Patch Cord and achieves Gigabit Ethernet like its flat counterparts.


This cable enables data transmission speeds of up to 1 Gigabit Ethernet. Power-over-Ethernet according to IEEE 802.3af is also supported.

The cables comply with the ISO/IEC Category 6 channel standard and EN50173.



DESCRIPTION

Category	CAT6A
Connector Type	RJ45
Boot	SLIM design, snap-on nose guard, length specification
Assignment	1:1 TIA/EIA 568B
Shield	U/UTP unshielded
Sheath	LSZH
Wires	AWG28 100% Copper
Diameter	3.6 mm
Temperature range	-20°C to +60°C
Standard colours	Gray, Yellow, Orange, Red, Green, Blue, Black, Violet, White
Packaging unit	Single Unit
Standard lengths	0.15 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.5 m / 10,0 m

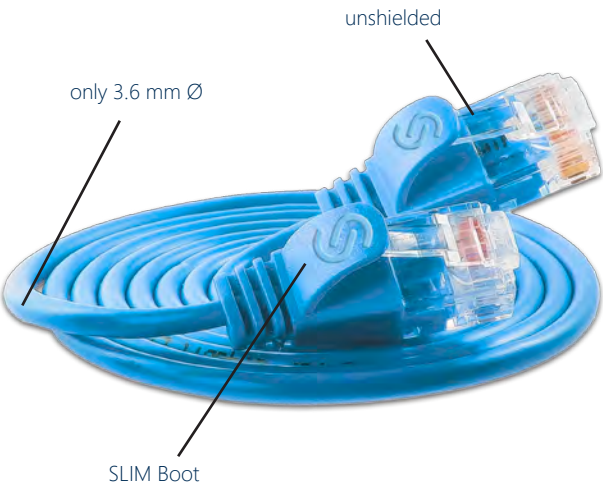



The comparison shows the difference.

The dream of every IT technician, network administrator, mechatronics engineer or building systems engineer:

- No cable clutter, no cable jams.
- Highly flexible network cables make this dream a reality.

ORDER INFORMATION



COLOUR	PART NUMBER
Gray	SLIM-L-UU-K6A x.x
Black	SLIM-L-UU-K6A x.x BK
Blue	SLIM-L-UU-K6A x.x BL
Green	SLIM-L-UU-K6A x.x GN
Orange	SLIM-L-UU-K6A x.x OR
Red	SLIM-L-UU-K6A x.x RD
Violet	SLIM-L-UU-K6A x.x VT
White	SLIM-L-UU-K6A x.x WT
Yellow	SLIM-L-UU-K6A x.x YE

x.x = Length specification


Standard lengths:

0.1 / 0.15 / 0.25 / 0.35 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.5 m / 10.0 m

Custom lengths possible

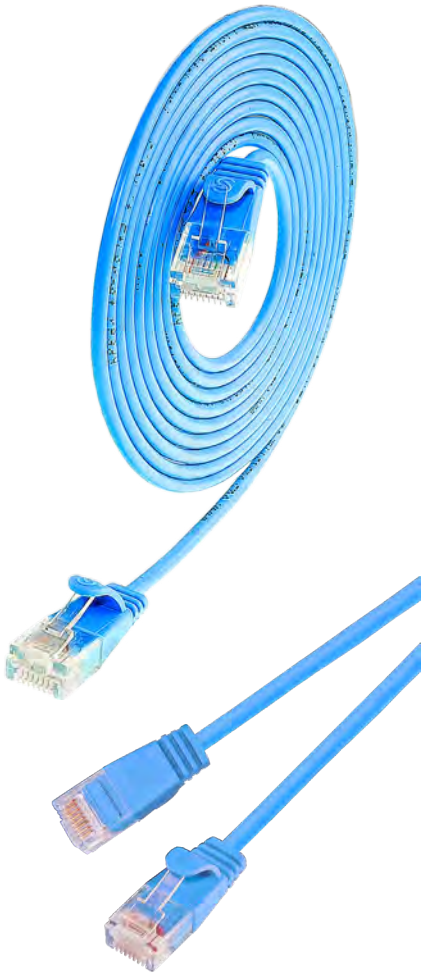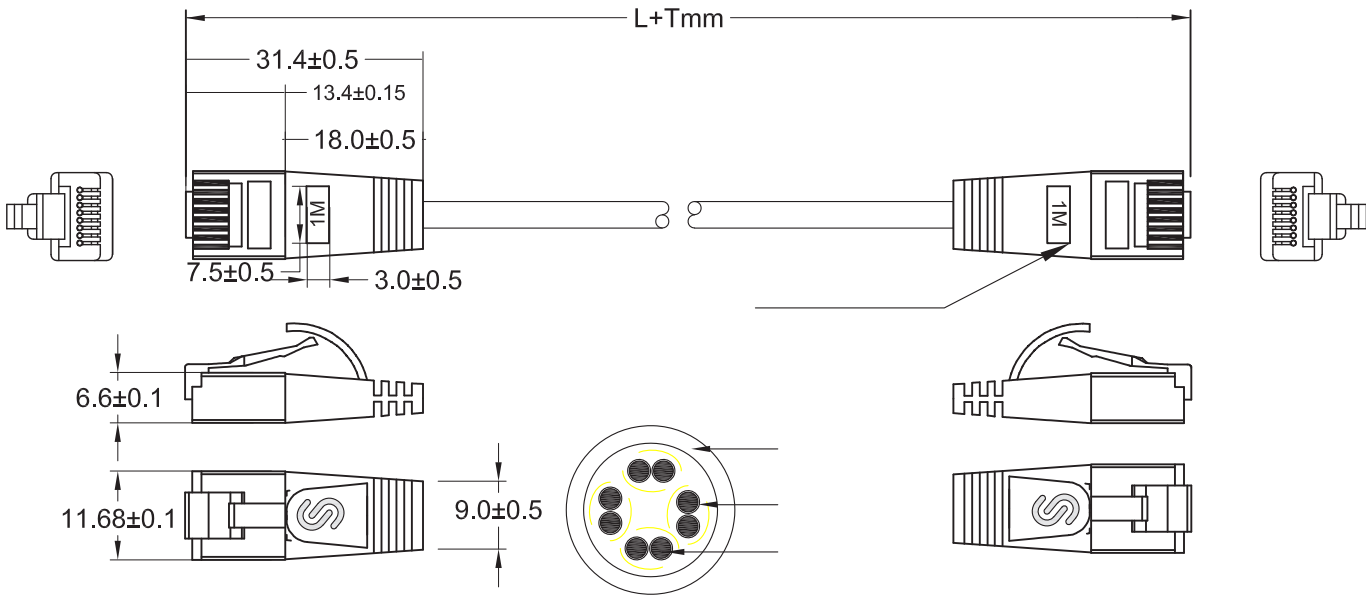

CAT6A_A SLIM LIGHT PATCH CORD UNSHIELDED, TRANSLUCENT CONNECTORS

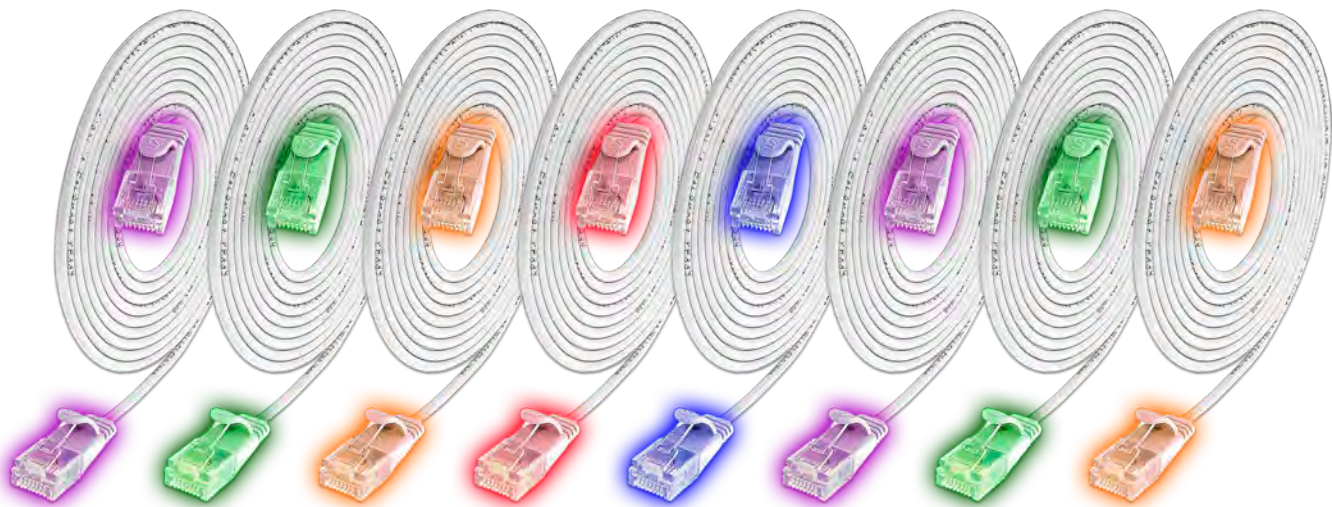

The ultimate patch cord experience with lighting effects thanks to the Etherlighting™ system.

The unshielded version with a diameter of only 3.6 mm resembles a Fiber Optic Patch Cord and achieves Gigabit Ethernet like its flat counterparts.

This cable enables data transmission speeds of up to 1 Gigabit Ethernet. Power-over-Ethernet according to IEEE 802.3af is also supported.

The cables comply with the ISO/IEC Category 6 channel standard and EN50173.

In addition, the connector is made of translucent material, which optimally supports the Etherlighting™ system.


Rot

SLIM-L-UU-K6A



DESCRIPTION

Category	CAT6A
Connector Type	RJ45
Boot	SLIM design, snap-on nose guard, length specification
Assignment	1:1 TIA/EIA 568B
Shield	U/UTP unshielded
Sheath	LSZH
Wires	AWG36 100% Copper
Diameter	3.6 mm
Temperature range	-20°C to +60°C
Standard colours	White
Packaging unit	Single Unit or Multipacks
Standard lengths	0.1 / 0.15 / 0.20 / 0.25 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.5 m

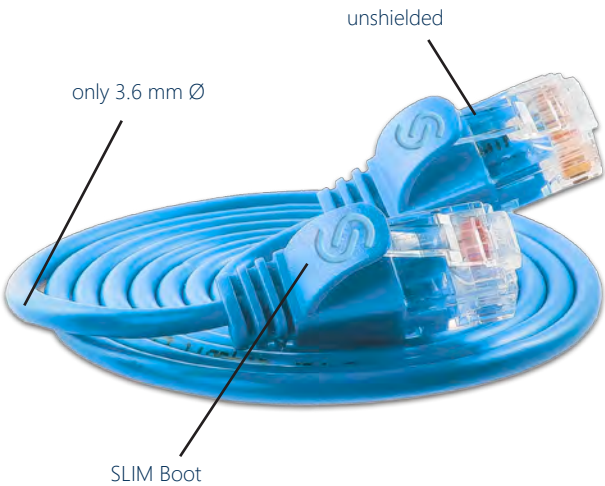



The comparison shows the difference.

The dream of every IT technician, network administrator, mechatronics engineer or building systems engineer:

- No cable clutter, no cable jams.
- Highly flexible network cables make this dream a reality.

ORDER INFORMATION

COLOUR

White

PART NUMBER



SLIM-L-UU-K6A-TL x.x WT

x.x = Length specification

Standard lengths:


0.1 / 0.15 / 0.20 / 0.25 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.5 m

Custom lengths possible

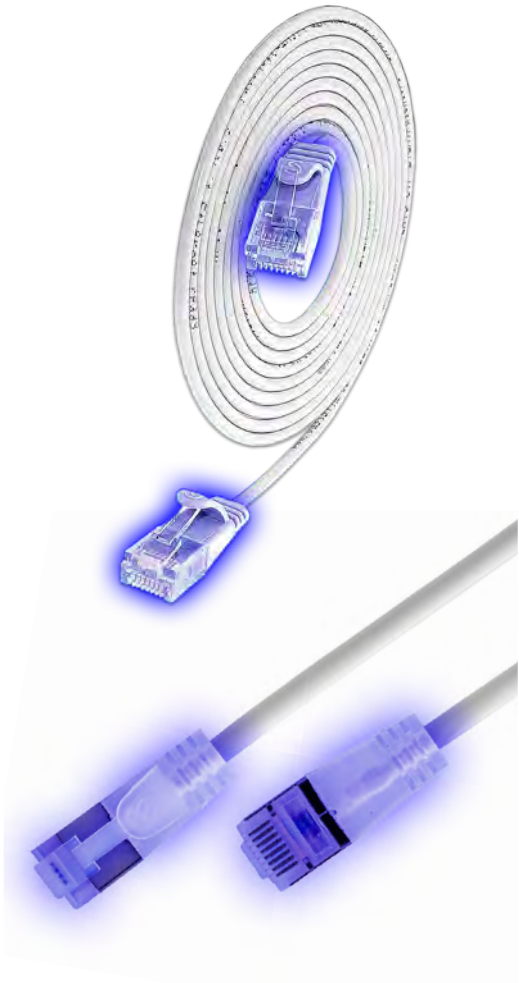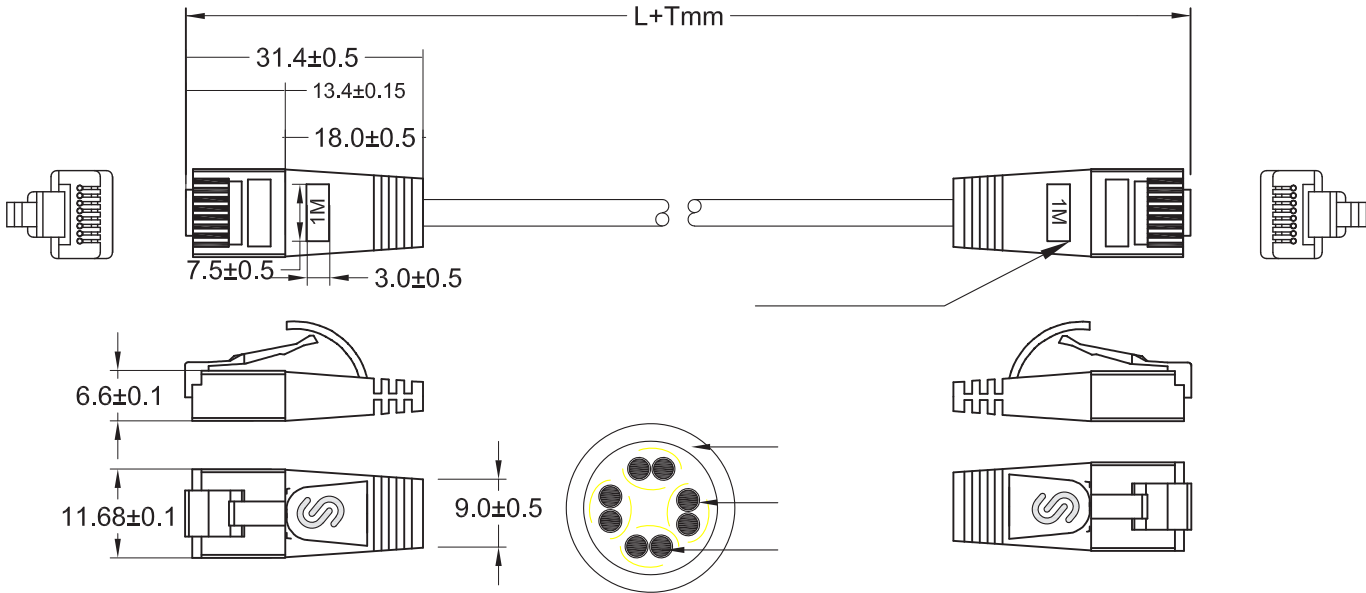



CAT6 SLIM LIGHT PATCH CORD UNSHIELDED, ROUND

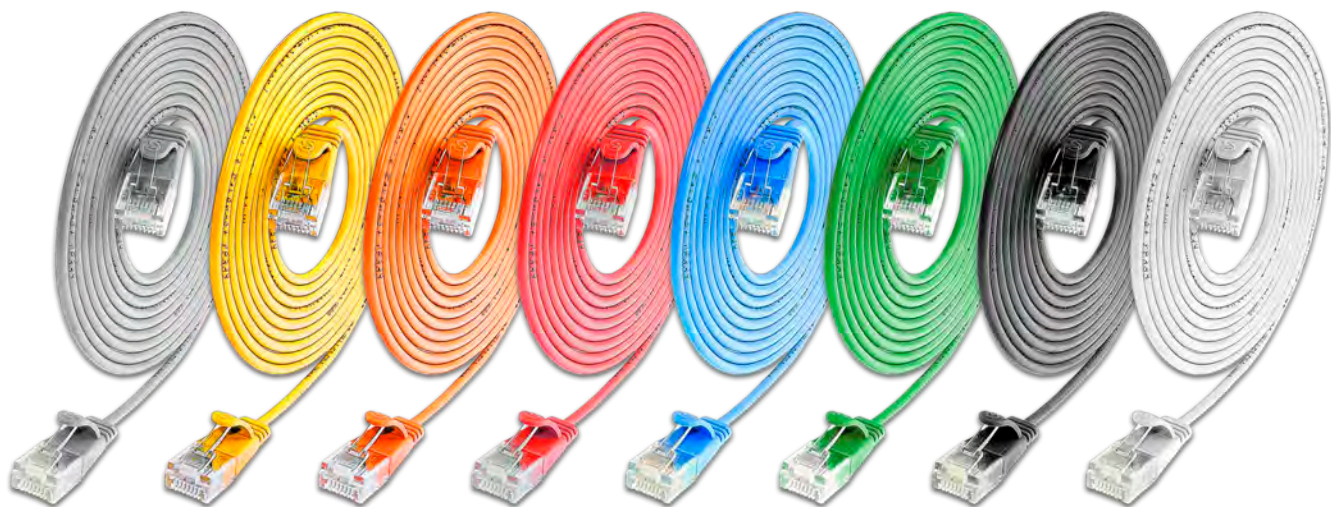

After years of success with our FLAT SLIM Patch Cords, we can now offer the same performance in a round design.

With a diameter of only 2.8mm, the unshielded version resembles a Fiber Optic Patch Cord and achieves Gigabit Ethernet like its flat counterparts.


This cable enables data transmission speeds of up to 1 Gigabit Ethernet. Power-over-Ethernet according to IEEE 802.3af is also supported.

The cables comply with the ISO/IEC Category 6 channel standard and EN50173.



DESCRIPTION

Category	CAT6
Connector Type	RJ45
Boot	SLIM design, snap-on nose guard, length specification
Assignment	1:1 TIA/EIA 568B
Shield	U/UTP unshielded
Sheath	PVC
Wires	AWG36 100% Copper
Diameter	2.8 mm
Temperature range	-20°C to +60°C
Standard colours	Gray, Yellow, Orange, Red, Green, Blue, Black, White
Packaging unit	Single Unit
Standard lengths	0.15 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.5 / 10.0 m
Certificate	GHMZ certified, Tested with Fluke Cable-Certifier in Channel Test

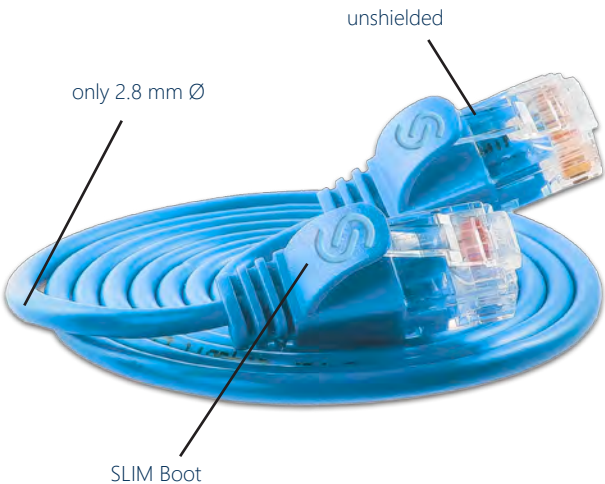



The comparison shows the difference.

The dream of every IT technician, network administrator, mechatronics engineer or building systems engineer:

- No cable clutter, no cable jams.
- Highly flexible network cables make this dream a reality.

ORDER INFORMATION


COLOUR	PART NUMBER
Gray	PKW-LIGHT-K6 x.x
Yellow	PKW-LIGHT-K6 x.x GE
Orange	PKW-LIGHT-K6 x.x OR
Red	PKW-LIGHT-K6 x.x RT
Green	PKW-LIGHT-K6 x.x GN
Blue	PKW-LIGHT-K6 x.x BL
Black	PKW-LIGHT-K6 x.x SW
White	PKW-LIGHT-K6 x.x WS

x.x = Length specification

Standard lengths:


0.15 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.5 / 10.0 m

Custom lengths possible

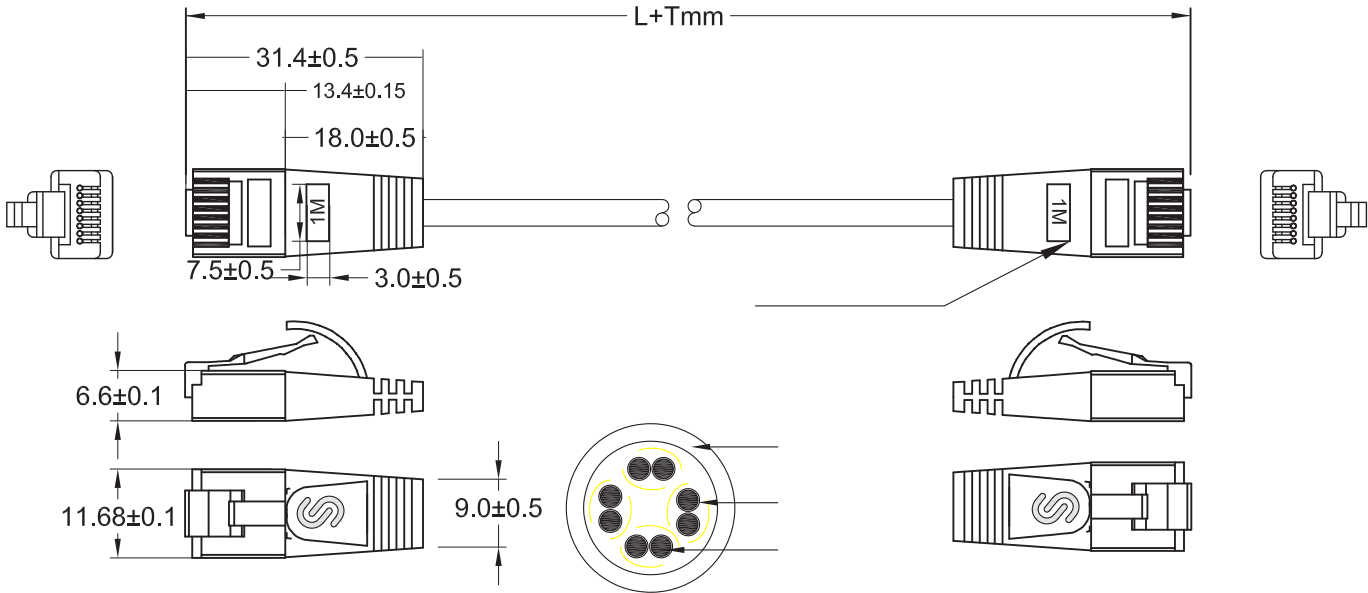



CAT6 SLIM LIGHT PATCH CORD SHIELDED, ROUND

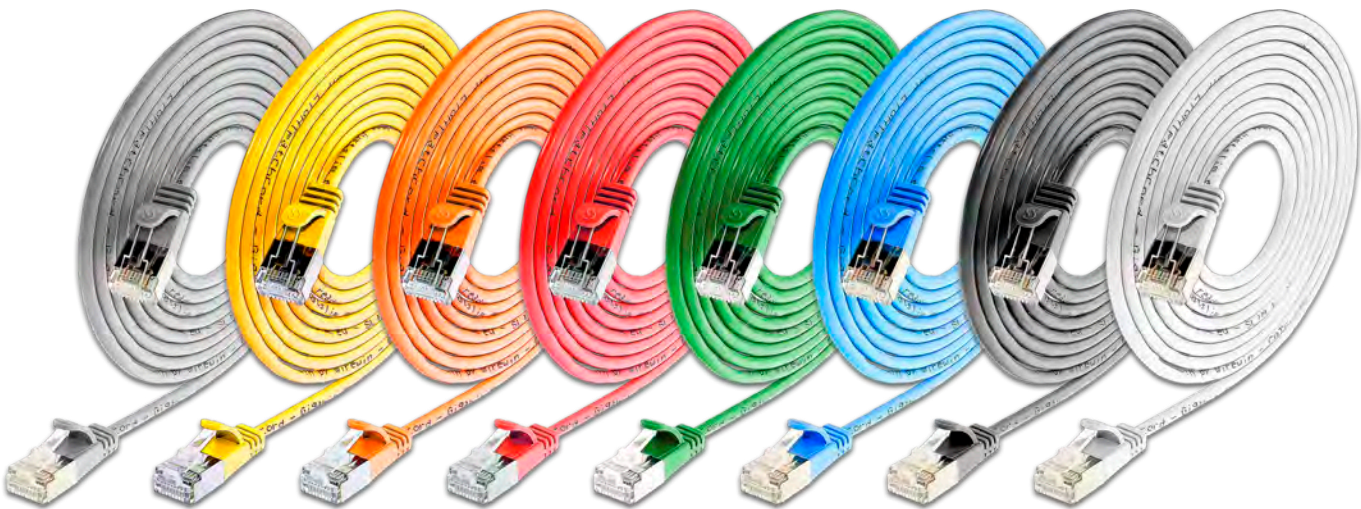

Enhance your connectivity with our state-of-the-art solution: a seamless blend of elegance and performance. Discover our latest innovation - a cable that combines a timeless, round design with the robust protection of full, pair-by-pair shielding. It's sleek 3.8mm outer diameter surpasses all expectations, offering you a harmonious fusion of form and function.

IEEE 802.3af compliant Power over Ethernet support ensures uninterrupted power so you can look to the future with confidence.


Built to the highest standards, these cords meet ISO/IEC and EN50173 Channel Category 6 standards for reliability and performance.

Upgrade your connectivity today-redefine what's possible with a cord designed for high performance.




DESCRIPTION

Category	CAT6
Connector Type	RJ45
Boot	SLIM design, snap-on nose guard, length specification
Assignment	1:1 TIA/EIA 568B
Shield	U/FTP shielded
Sheath	PVC
Wires	AWG32 100% Copper
Diameter	3.8 mm
Temperature range	-20°C to +60°C
Standard colours	Gray, Yellow, Orange, Red, Green. Blue, Black, White
Packaging unit	Single Unit
Standard lengths	0.15 / 0.25 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.5 / 10.0 / 15.0 / 20.0 m
Certificate	GHMZ certified, Tested with Fluke Cable-Certifier in Channel Test

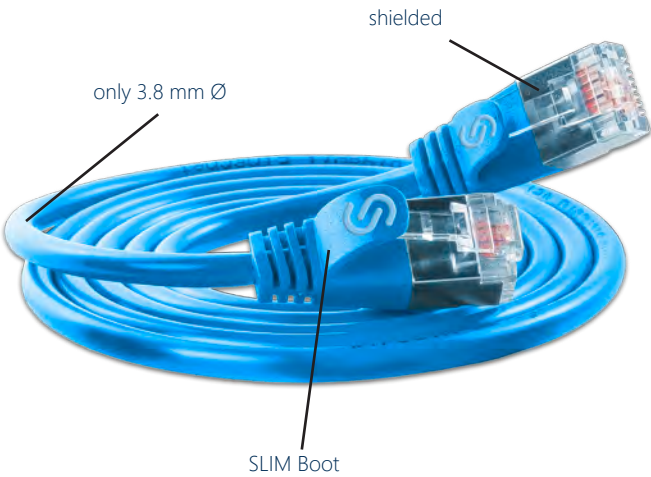

L I G H T

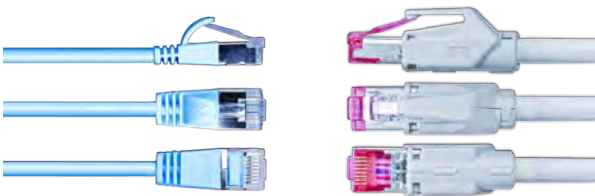

The comparison shows the difference.

The dream of every IT technician, network administrator, mechatronics engineer or building systems engineer:

- No cable clutter, no cable jams.
- Highly flexible network cables make this dream a reality.




ORDER INFORMATION

COLOUR	PART NUMBER
Gray	PKW-LIGHT-STP-K6 x.x
Yellow	PKW-LIGHT-STP-K6 x.x GE
Orange	PKW-LIGHT-STP-K6 x.x OR
Red	PKW-LIGHT-STP-K6 x.x RT
Green	PKW-LIGHT-STP-K6 x.x GN
Blue	PKW-LIGHT-STP-K6 x.x BL
Black	PKW-LIGHT-STP-K6 x.x SW
White	PKW-LIGHT-STP-K6 x.x WS

x.x = Length specification

Standard lengths:
0.15 / 0.25 / 0.5 / 1.0 / 1.5 / 2.0 / 3.0 / 5.0 / 7.5 / 10.0 / 15.0 / 20.0 m
Custom lengths possible

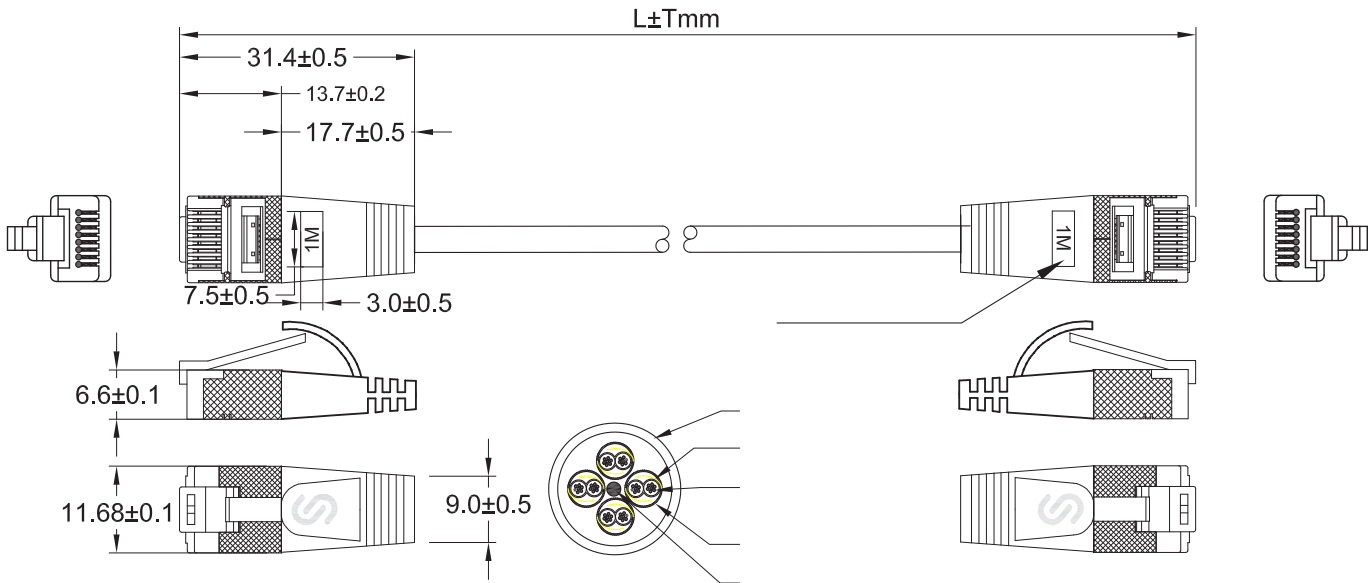




CAT6_A SLIM LIGHT PATCH CORD UNSHIELDED, ROUND, MULTIPACK

SUSTAINABLE AND GREEN:

Our packaging is completely plastic-free. No plastic packing, no cord ties - simply a clean solution for the environment. With the SLIM Multipack, you are actively helping to reduce plastic waste.



MULTIPACKS	GREY	BLACK	BLUE	GREEN
Multipack, SLIM Light, 0.1 m, 50 Pieces	SLIM-LS-K6A 0.1 50	SLIM-LS-K6A 0.1 50 BK	SLIM-LS-K6A 0.1 50 BI	SLIM-LS-K6A 0.1 50 GN
Multipack, SLIM Light, 0.15 m, 50 Pieces	SLIM-LS-K6A 0.15 50	SLIM-LS-K6A 0.15 50 BK	SLIM-LS-K6A 0.15 50 BI	SLIM-LS-K6A 0.15 50 GN
Multipack, SLIM Light, 0.25 m, 50 Pieces	SLIM-LS-K6A 0.25 50	SLIM-LS-K6A 0.25 50 BK	SLIM-LS-K6A 0.25 50 BI	SLIM-LS-K6A 0.25 50 GN
Multipack, SLIM Light, 0.5 m, 90 Pieces	SLIM-LS-K6A 0.5 90	SLIM-LS-K6A 0.5 90 BK	SLIM-LS-K6A 0.5 90 BI	SLIM-LS-K6A 0.5 90 GN
Multipack, SLIM Light, 1.0 m, 90 Pieces	SLIM-LS-K6A 1.0 90	SLIM-LS-K6A 1.0 90 BK	SLIM-LS-K6A 1.0 90 BI	SLIM-LS-K6A 1.0 90 GN
Multipack, SLIM Light, 1.5 m, 60 Pieces	SLIM-LS-K6A 1.5 60	SLIM-LS-K6A 1.5 60 BK	SLIM-LS-K6A 1.5 60 BI	SLIM-LS-K6A 1.5 60 GN
Multipack, SLIM Light, 2.0 m, 60 Pieces	SLIM-LS-K6A 2.0 60	SLIM-LS-K6A 2.0 60 BK	SLIM-LS-K6A 2.0 60 BI	SLIM-LS-K6A 2.0 60 GN
Multipack, SLIM Light, 3.0 m, 36 Pieces	SLIM-LS-K6A 3.0 36	SLIM-LS-K6A 3.0 36 BK	SLIM-LS-K6A 3.0 36 BI	SLIM-LS-K6A 3.0 36 GN

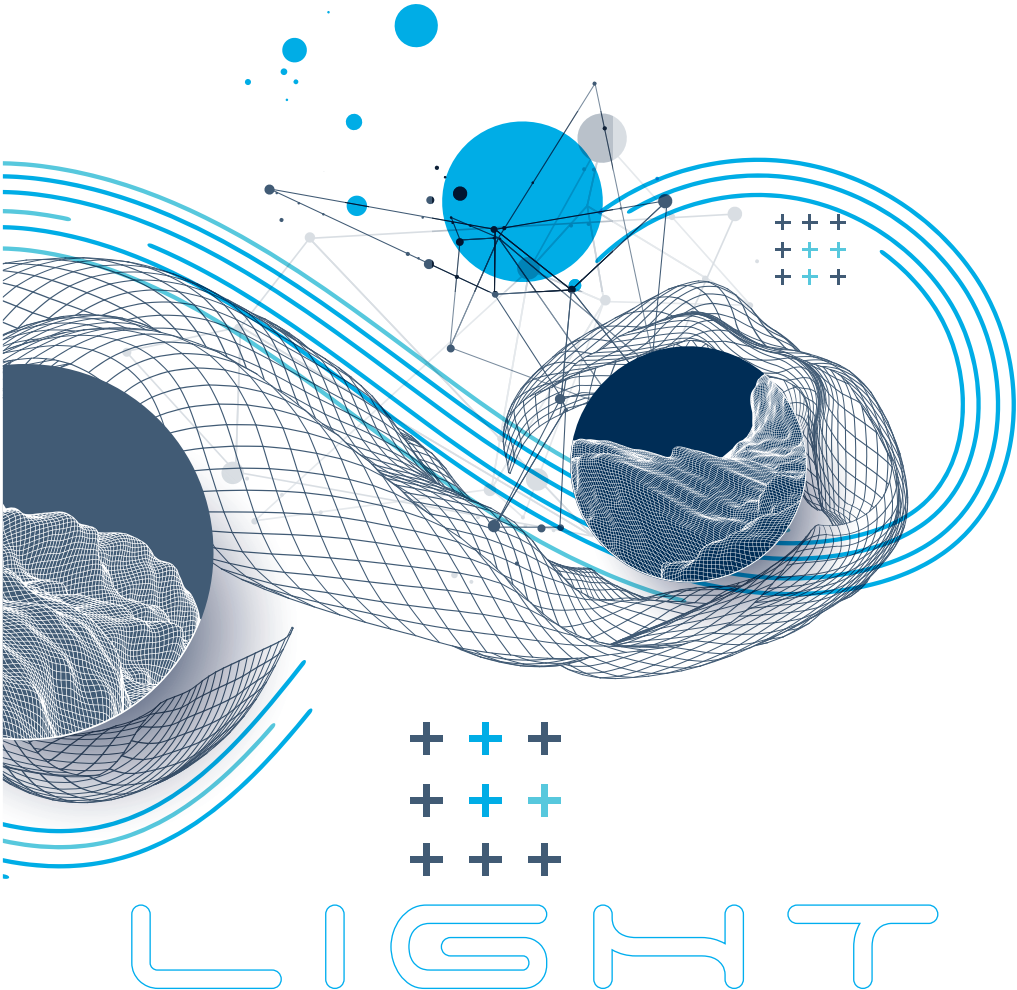

SAVE TIME AND WORK MORE EFFICIENTLY:

With the SLIM Multipack, you no longer have to laboriously unpack each cord and remove cable ties. Instead, you can open the box and start installation right away.


As an installer, you save valuable time and don't have to waste a lot of time unpacking the patch cords. With as few as 50 cords, you save around 15-20 minutes, and the more cords, the more time you gain for other tasks.



ORANGE	RED	WHITE	VIOLET	YELLOW
SLIM-LS-K6A 0.1 50 OR	SLIM-LS-K6A 0.1 50 RD	SLIM-LS-K6A 0.1 50 WT	SLIM-LS-K6A 0.1 50 VT	SLIM-LS-K6A 0.1 50 YE
SLIM-LS-K6A 0.15 50 OR	SLIM-LS-K6A 0.15 50 RD	SLIM-LS-K6A 0.15 50 WT	SLIM-LS-K6A 0.15 50 VT	SLIM-LS-K6A 0.15 50 YE
SLIM-LS-K6A 0.25 50 OR	SLIM-LS-K6A 0.25 50 RD	SLIM-LS-K6A 0.25 50 WT	SLIM-LS-K6A 0.25 50 VT	SLIM-LS-K6A 0.25 50 YE
SLIM-LS-K6A 0.5 90 OR	SLIM-LS-K6A 0.5 90 RD	SLIM-LS-K6A 0.5 90 WT	SLIM-LS-K6A 0.5 90 VT	SLIM-LS-K6A 0.5 90 YE
SLIM-LS-K6A 1.0 90 OR	SLIM-LS-K6A 1.0 90 RD	SLIM-LS-K6A 1.0 90 WT	SLIM-LS-K6A 1.0 90 VT	SLIM-LS-K6A 1.0 90 YE
SLIM-LS-K6A 1.5 60 OR	SLIM-LS-K6A 1.5 60 RD	SLIM-LS-K6A 1.5 60 WT	SLIM-LS-K6A 1.5 60 VT	SLIM-LS-K6A 1.5 60 YE
SLIM-LS-K6A 2.0 60 OR	SLIM-LS-K6A 2.0 60 RD	SLIM-LS-K6A 2.0 60 WT	SLIM-LS-K6A 2.0 60 VT	SLIM-LS-K6A 2.0 60 YE
SLIM-LS-K6A 3.0 36 OR	SLIM-LS-K6A 3.0 36 RD	SLIM-LS-K6A 3.0 36 WT	SLIM-LS-K6A 3.0 36 VT	SLIM-LS-K6A 3.0 36 YE



TOUGH

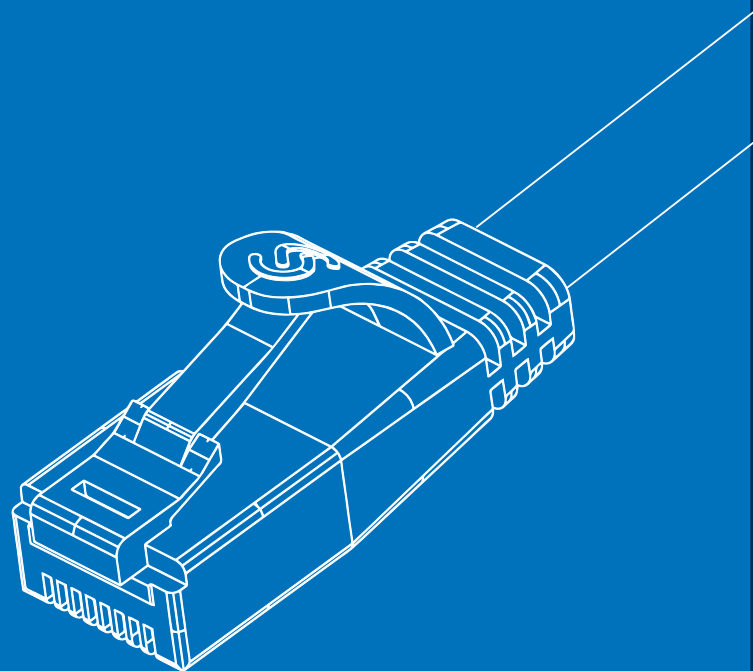

NYLON REINFORCED COPPER PATCH CORD

CAT6 SLIM TOUGH PATCH CORD unshielded, with reinforced nylon jacket_____34

CAT6 SLIM TOUGH PATCH CORD shielded, with reinforced nylon jacket_____36

CAT 6 SLIM TOUGH PATCH CORD UNSHIELDED, WITH REINFORCED NYLON JACKET



Discover a new level of ruggedness with our TOUGH Patch Cords - an embodiment of strength in a sleek profile. Like a hidden force, these cords embody the essence of SLIM Patch Cords, reinforced with an extra layer of nylon armor that increases their mechanical strength.

Designed to meet the challenges of demanding environments and field technician use, TOUGH patch cords prove their durability and reliability. Explore the unshielded version, a convergence of SLIM UTP Patch Cords finesse with a rugged nylon jacket that encapsulates resiliency in every strand.

Meticulously engineered to the Channel Category 6 standard in accordance with ISO/IEC and EN50173, these cables promise unwavering performance. Enhance your connectivity with TOUGH Patch Cords - where ruggedness meets sophistication and strength knows no compromise.



DESCRIPTION

Category	CAT6
Connector Type	RJ45
Boot	SLIM design, snap-on nose guard, length specification
Assignment	1:1 TIA/EIA 568B
Shield	U/UTP unshielded
Sheath	PVC
Wires	AWG36 100% Copper
Dimensions	4.6 mm x 1.6 mm
Temperature range	-20°C to +60°C
Standard colours	Gray, Yellow, Orange, Red, Green, Blue
Packaging unit	Single Unit
Standard lengths	0.25 / 0.5 / 1.0 / 2.0 / 3.0 / 5.0 / 10.0 m



TOUGH



The comparison shows the difference

The dream of every IT technician, network administrator, mechatronics engineer or building systems engineer:

- No cable clutter, no cable jams.
- Flat and highly flexible network cables make this dream a reality.




ORDERING INFORMATION

COLOUR	PRODUCT NUMBER
Grey	PKW-TOUGH-K6 x.x
Yellow	PKW-TOUGH-K6 x.x GE
Red	PKW-TOUGH-K6 x.x RT
Green	PKW-TOUGH-K6 x.x GN
Blue	PKW-TOUGH-K6 x.x BL

x.x = Length Specification

Standard Lengths
0.25 / 0.5 / 1.0 / 2.0 / 3.0 / 5.0 / 10.0 m
Custom lengths possible

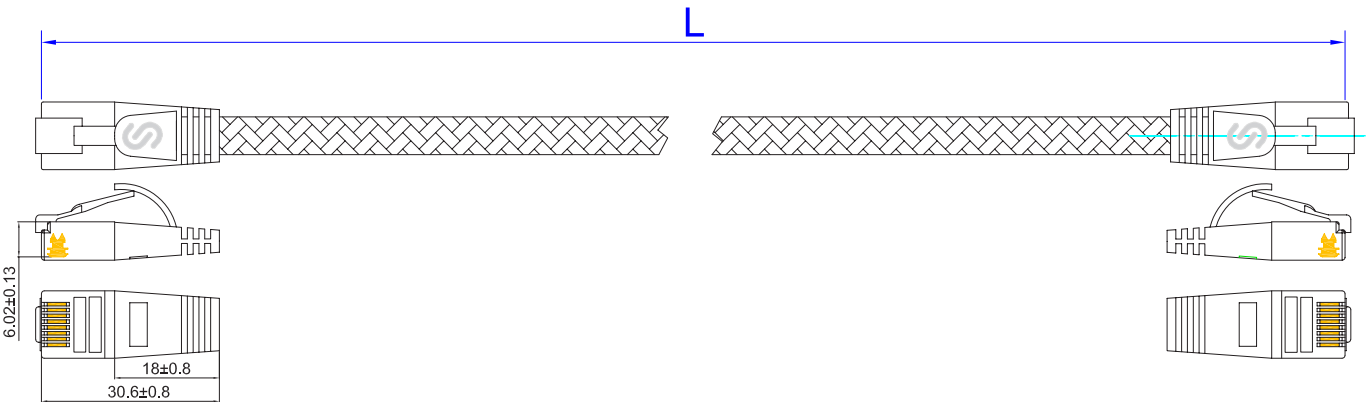

CAT6 SHIELDED SLIM TOUGH PATCH CORD, WITH REINFORCED NYLON JACKET



Introducing TOUGH Patch Cords: the embodiment of internal finesse, reinforced by an external shielding. Born from the essence of SLIM Patch Cords, these marvels are reinforced with an additional nylon jacket, forging a bond of mechanical might.

In the realm of rugged domains and the dynamic landscapes navigated by field technicians, TOUGH Patch Cords emerge as a beacon of unwavering reliability. Enter the unshielded variety, where the ingenuity of SLIM UTP cable meets the rugged embrace of nylon to create a symphony of strength and precision.

Meticulously engineered to meet the Channel Category 6 standard of ISO/IEC and EN50173, these cords are built to last. Elevate your connectivity with TOUGH Patch Cords, where toughness meets finesse, and your network strides confidently into any challenge.



DESCRIPTION

Category	CAT6
Connector	RJ45
Boot	SLIM Design, Latch Protection, Length in m
Occupancy	1:1 TIA/EIA 568B
Shield	U/FTP shielded
Sheath	PVC
Wires	AWG36 100% copper
Cable dimensions	6.6 mm x 2.0 mm
Temperature range	-20°C to +60°C
Standard colours	Gray, Yellow, Red, Green, Blue
Packaging unit	Single Unit
Standard lengths	0.25 / 0.5 / 1.0 / 2.0 / 3.0 / 5.0 / 10.0 m



TOUGH



The comparison shows the difference

The dream of every IT technician, network administrator, mechatronics engineer or building systems engineer:


- No cable clutter, no cable jams.
- Flat and highly flexible network cables make this dream a reality.

ORDERING INFORMATION

COLOUR	PRODUCT NUMBER
Grey	PKW-TOUGH-STP-K6 x.x
Yellow	PKW-TOUGH-STP-K6 x.x GE
Red	PKW-TOUGH-STP-K6 x.x RT
Green	PKW-TOUGH-STP-K6 x.x GN
Blue	PKW-TOUGH-STP-K6 x.x BL

x.x = Length Specification

Standard Lengths
0.25 / 0.5 / 1.0 / 2.0 / 3.0 / 5.0 / 10.0 m
Custom lengths possible

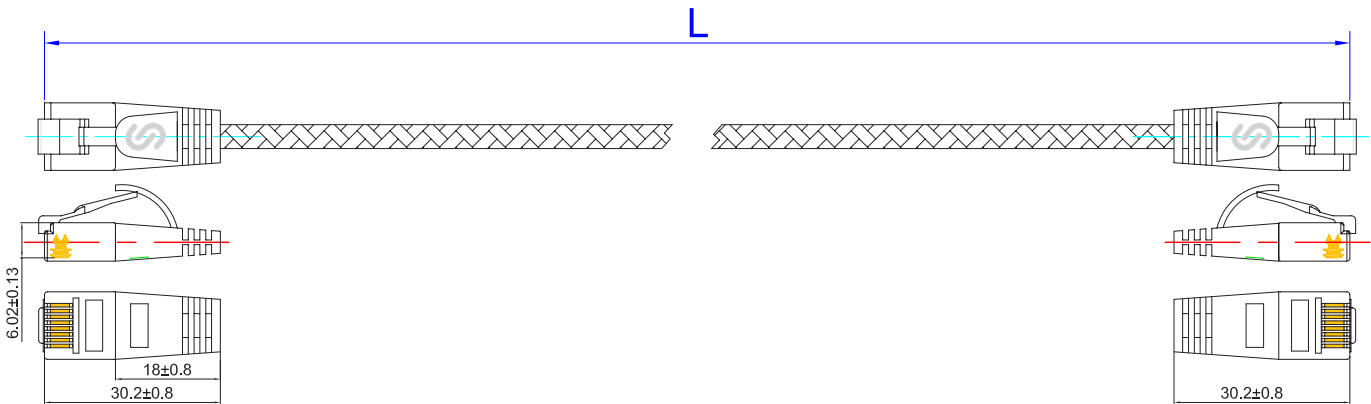



**SMALL
IS THE NEW
BIG**





T: +43 31 72 / 4 22 99-0
F: +43 31 72 / 4 22 99-11



Energiestraße 10
8160 Weiz
Austria



office@triotronik.com
www.triotronik.com