


CAT6 Gigabit Ethernet Keystone module, shielded

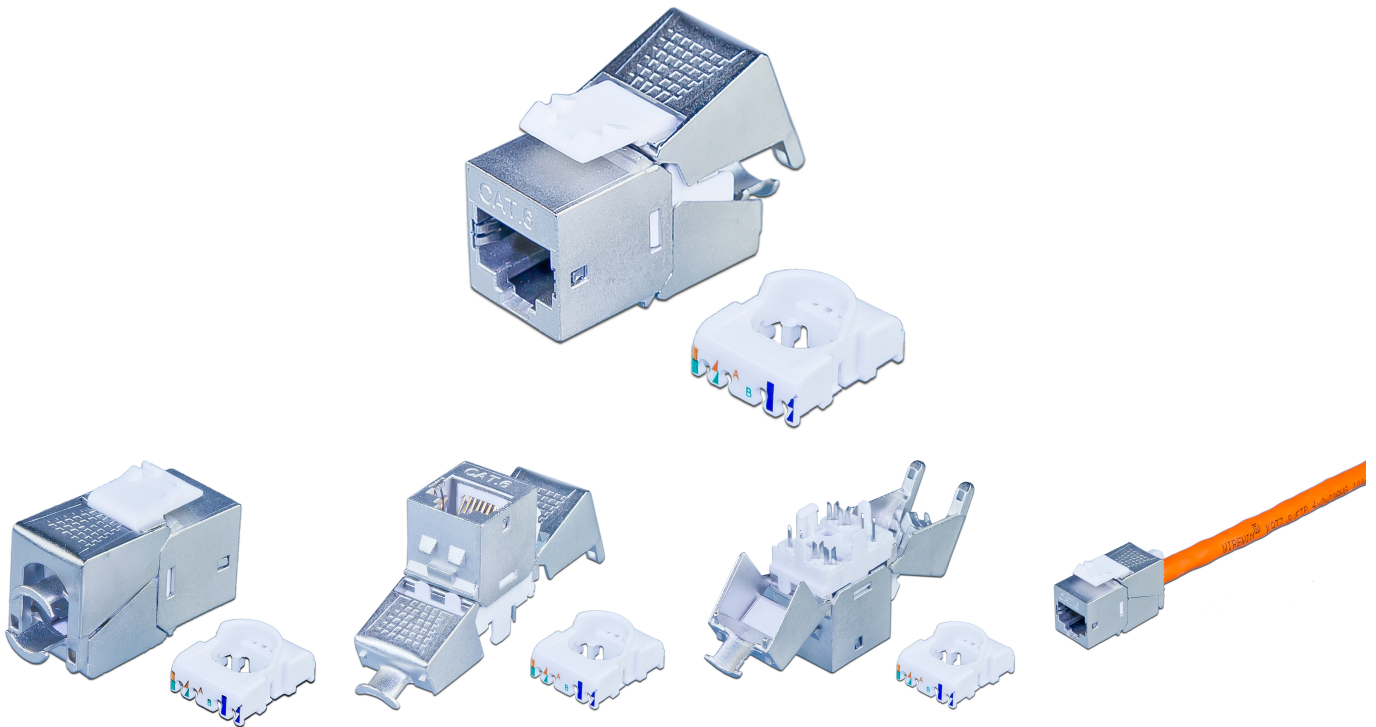

DESCRIPTION

With this RJ45 keystone module, the user receives an RJ45 module of the highest quality. It can be assembled in about 1-2 minutes just using a side cutter. The freely accessible contact zone ensures perfect assembly quality and thus secure transmission performance. A 360 ° shielding is also guaranteed. The special contact geometry in connection with a 50µm gold plating ensures 4PPoE according to IEEE 802.3bt under all circumstances. The housing material consists of nickel-plated die-cast zinc and therefore meets the highest environmental and mechanical requirements. In connection with the design-compatible outlets, it can be combined with different design programs from different current outlet manufacturer.

FEATURES

- Wiring: 4-pair AWG 23-22 according to T568A or T568B
- Cable diameter: continuously from 5 - 9.3 mm, cable feed straight
- Standards: Category 6
- Channel and permanent link class E according to ISO/IEC 11801 & EN 50173
- PoE plus remote powering according to IEEE802.3 af/at IEC 60512-99-001
- Dimensions: 35.1 x 14.5 x 18.4 mm
- Compact socket design - switch program compatible
- Contacts: phosphor bronze with 50µm gold plating

CAT6 Gigabit Ethernet Keystone module, shielded

PRODUCT FEATURES

Connection type	Insulation displacement connector
Model	Bus (jack)
AWG-range	22 - 23
Pining	TIA/EIA 568 A/B
Colour	Grey
Suitable for flat cable	No
Suitable for litz wire conductor	No
Suitable for solid conductors	Yes
Suitable for round cable	Yes
Screened	Yes
Category	CAT.6
Material	Metal
Product Family	Keystone
Special tool necessary	No
Type of connector	RJ45 8(8)
Transparent	No
EAN Code	9120072487217
Weight	0.02 kg
PRODUCT NUMBER	WKS JACK STP KAT6