




## SPBOX 48E09 OS2 DLC/APC

### Fiber Splice Box, 48 Fibers, 24x DLC/APC Singlemode, 9/125µm OS2 G657.A1 Pigtail

---

#### Features

- Fully equipped and ready-to-splice splice box
  - Including couplings and pigtails
  - 19" cabinet installation with 1U
  - Pigtails already inserted ready for splicing
  - Integrated fiber management within the splice box
  - Materials:
    - Metal housing powder-coated steel, RAL7035
    - Splice trays of plastic
  - Scope of delivery:
    - 1x 1U Splicebox, fully assembled, ready to splice
    - 2x PG13.5 screws
    - 4x Cage Nuts & Screws
    - 2x Crimp Splice Holder
    - 2x Splice Protection
- 

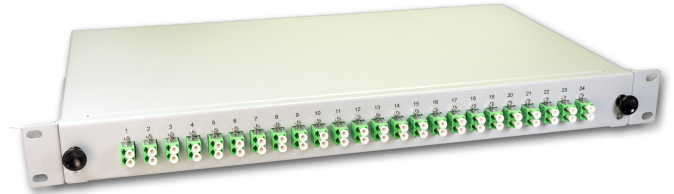

---

#### Application

The splice box serves as a transfer point between the fiber optic installation cable and the in-house network cabling. The fiber optic cable is spliced in the splice cassette and divided into pigtails. All common mating faces are possible, e.g. LC, SC or ST. The splice boxes are usually installed in 19" network or server cabinets.

To save valuable time during installation, we offer the splice boxes fully equipped and ready to splice. The box is available in gray (RAL 7035). The equipment options are very extensive.

---

---

#### Description

Pull-out splice box with quick-release fastener, equipped with couplings and pigtails including splice cassette and splice holder. Extension depth approx. 22 cm for easy access to the couplings and the splice tray. The couplings correspond to the type of the inserted pigtails (e.g. blue for OS2 singlemode) The splice box can be moved 20 mm inwards in order to offer additional protection to the patch cables connected at the front. The rear has 4 mounting holes for PG screw connections for flexible cable feed.

---

## SPBOX 48E09 OS2 DLC/APC

Fiber Splice Box, 48 Fibers, 24x DLC/APC Singlemode, 9/125µm OS2 G657.A1 Pigtail

### Product Features

|                   |                           |
|-------------------|---------------------------|
| 19-inch Rackmount | Yes                       |
| Dimensions        | 480 x 43.5 x 257 mm       |
| Color             | RAL7035, grey             |
| Number of Fibers  | 24                        |
| Height U          | 1 U                       |
| Cable Length      | 1.5 m                     |
| Fiber Type        | 9/125µm, OS2, G.657.A1    |
| Fiber Cable       | DIN Colour Code           |
| Fiber Category    | Singlemode                |
| Fiber Connector   | 12x LC/APC Duplex         |
| Material          | Sheet Steel, powdercoated |
| Product Family    | Splice box, assembled     |



### Product Number

SPBOX 48E09 OS2 DLC/APC

### EAN Code

9120117650309